



TYPE P1

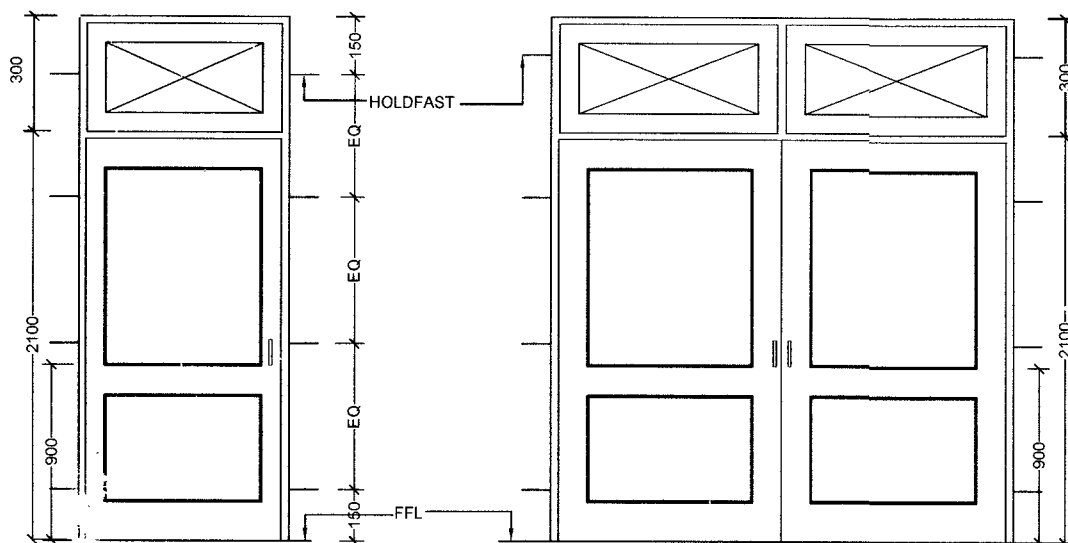

ELEVATION

ELEVATION

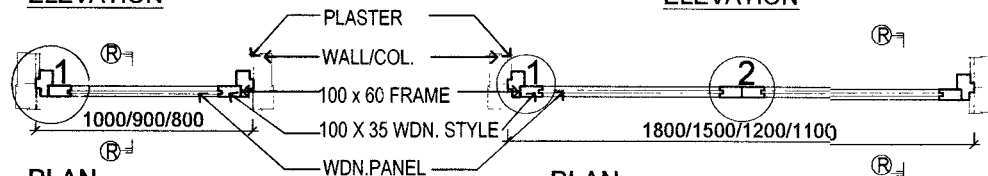


PLAN

PLAN

PD - 8X - (800X2400)  
PD - 9X - (900X2400)  
PD - 10X - (1000X2400)


PD - 11X - (1100X2400)  
PD - 12X - (1200X2400)  
PD - 15X - (1500X2400)  
PD - 18X - (1800X2400)

TYPE P2

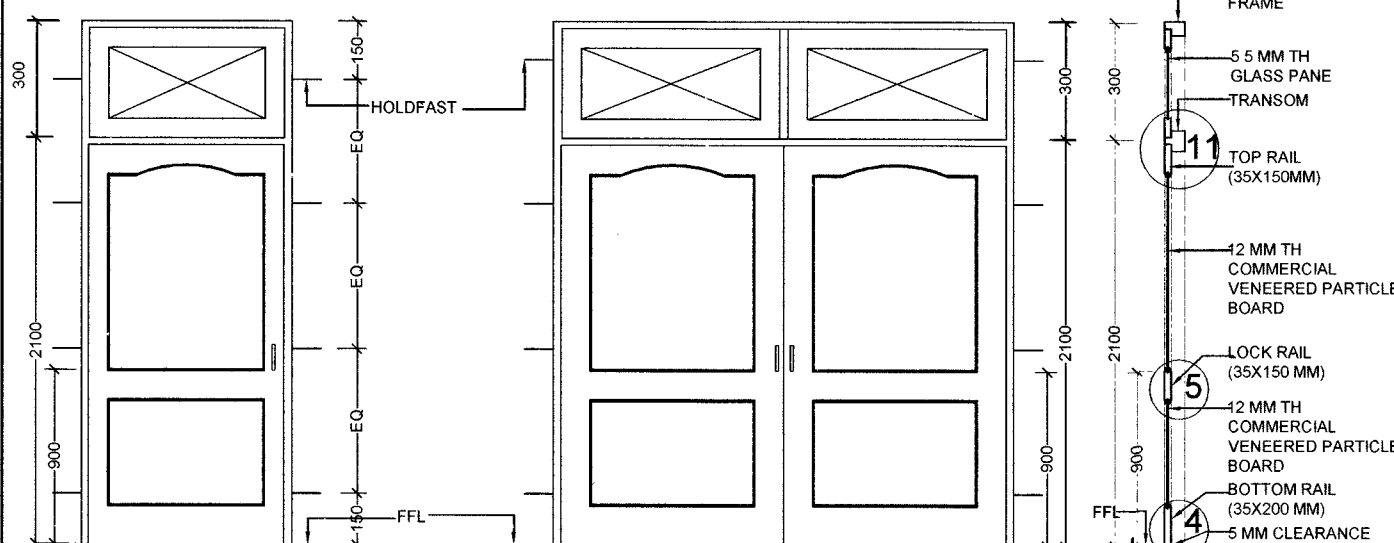

ELEVATION

ELEVATION

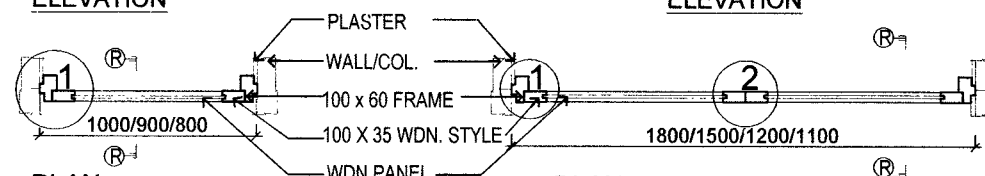


PLAN

PLAN


PD - 8X - (800X2400)  
PD - 9X - (900X2400)  
PD - 10X - (1000X2400)

PD - 11X - (1100X2400)  
PD - 12X - (1200X2400)  
PD - 15X - (1500X2400)  
PD - 18X - (1800X2400)

SECTION R-R

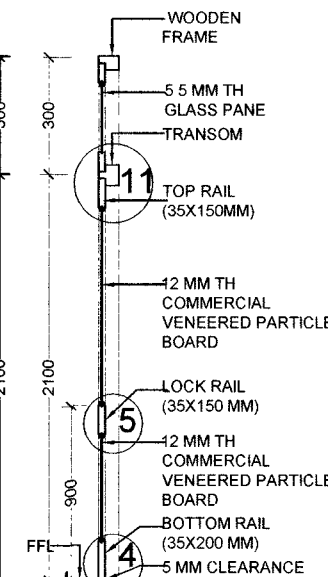


TYPE P1

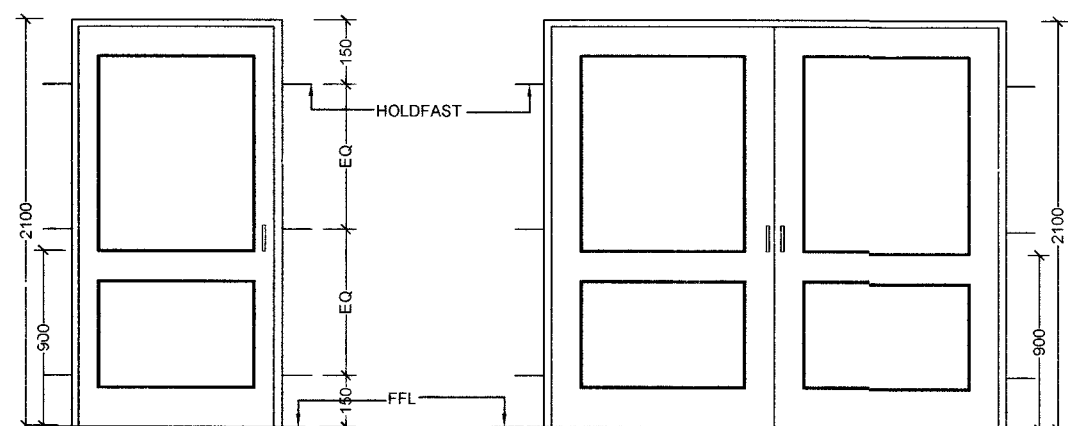

ELEVATION

ELEVATION

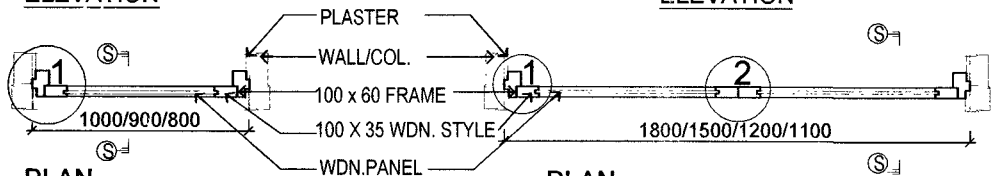


PLAN

PLAN

PD - 8 - (800X2100)  
PD - 9 - (900X2100)  
PD - 10 - (1000X2100)


PD - 11 - (1100X2100)  
PD - 12 - (1200X2100)  
PD - 15 - (1500X2100)  
PD - 18 - (1800X2100)

TYPE P2

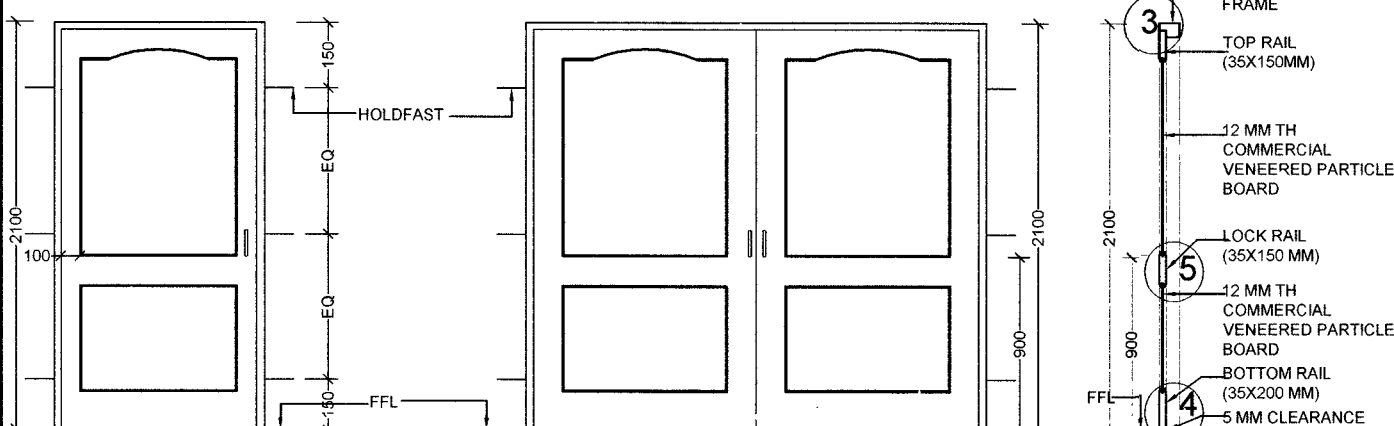

ELEVATION

ELEVATION

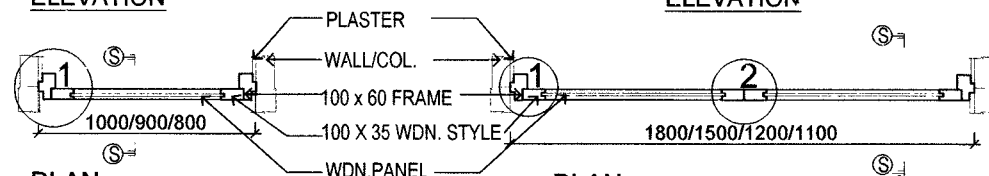



PLAN

PLAN

PD - 8 - (800X2100)  
PD - 9 - (900X2100)  
PD - 10 - (1000X2100)

PD - 11 - (1100X2100)  
PD - 12 - (1200X2100)  
PD - 15 - (1500X2100)  
PD - 18 - (1800X2100)

SECTION S-S

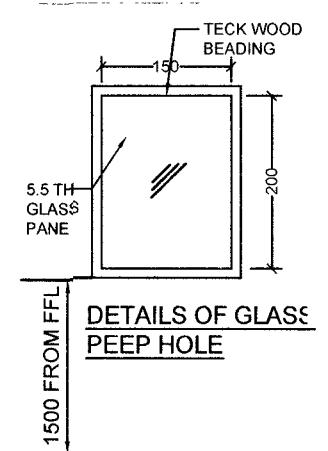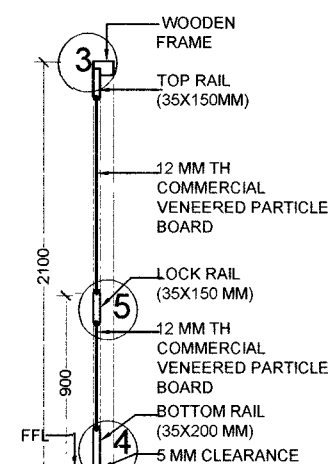DETAILS OF GLASS  
PEEP HOLE

SL NO	NOTES:-
1	ALL DIMENSIONS ARE GIVEN IN MILLIMETERS UNLESS OTHERWISE STATED.
2	FIGURED DIMENSIONS SHALL BE FOLLOWED.
3	EXECUTIVE AUTHORITY SHALL CHECK & VERIFY THE DRAWING BEFORE TAKING EXECUTION IN HAND.
4	CONTRACTOR TO CHECK & VERIFY ALL DIMENSIONS BEFORE EXECUTION OF WORK.
5	WIDTH OF THE DOOR IS INCLUSIVE OF 10 MM CLEARANCE AROUND BETWEEN DIMENSIONS BEFORE EXECUTION OF THE JAMB AND THE FRAME.
6	THE HEIGHT OF THE OPENING SHALL BE 2000 MM FOR ALL THE MARRIED ACCN AND 2100 MM FOR ALL OTM ACCN UNLESS OTHERWISE STATED.
7	GUARD CHAIN AND MAGIC EYE SHALL BE PROVIDED TO MAIN ENTRANCE DOOR OF ALL MARRIED ACCN.
8	BUTT HINGES SHALL BE SCREWED TO DOOR CONFIRMING TO IS 4351-1976 AND IN NO CASE THE SCREWS SHALL BE DIRECTLY HAMMERED TO THE DOOR SHUTTER / WOODEN FRAME.
9	IN CASE OF DOUBLE SHUTTER, FLY PROOF SHUTTERS SHALL OPEN OUTSIDE AND PANELED SHUTTER SHALL OPEN INSIDE THE ROOM UNLESS OTHERWISE SPECIFIED.
10	19 MM Ø 300 MM LONG S/S ALDROP BOLT SHALL BE PROVIDED EXTERNALLY TO ALL DOORS OF OTM/MARRIED ACCN.
11	GLASS PEEP HOLE (150X200) SHALL BE PROVIDED TO ALL DOORS WHERE MARKED IN MAIN DRAWING.
12	ONE NO. RUBBER CHOCK STOPPER SHALL BE SCREWED TO BOTTOM RAIL OF EACH LEAF, TO KEEP DOOR AWAY FROM WALL.
13	ALL WOODEN MEMBERS SHALL BE OF 2ND CLASS HARD WOOD AS SPECIFIED IN SSR PT-I.
14	PD-9 - PANELED DOOR OF 900 WIDTH FPD-9 - PANELED DOOR OF 900 WIDTH WITH FLY PROOF SHUTTER P1,P2,P3,P4- TYPE OF DOOR PATTERN. NOMENCLATURE OF DOOR WITH SUFFIX '-X' DENOTES DOOR WITH FIXED FAN LIGHT.
15	PATTERN P1/P2/P3/P4 SHALL BE PROVIDED AS MENTIONED IN MAIN PLAN, IF NOT P1 SHALL BE PROVIDED.
16	STAINLESS STEEL WIRE MESH SHALL BE OF STAINLESS STEEL WIRE CLOTH CONFIRMING TO IS HAVING NOT LESS THAN 0.4 MM DIA OF WIRE AND 1.4 MM MAXIMUM WIDTH OF APERTURE ALL AS SPECIFIED IN SSR PART-I.
17	HANDLES OF FLY PROOF AND MAIN SHUTTERS SHALL BE FIXED IN ZIG ZAG MANNER AS DIRECTED BY ENGINEER IN CHARGE.
18	PANEL INSERT: SHALL BE 12 MM THK PARTICLE BOARD COMMERCIAL VENEERED.
19	TWO COATS OF SYNTHETIC ENAMEL PAINT OVER COAT OF PRIMER ON WOODEN SURFACES.

S No	DATE	DESCRIPTION	INITIAL
REVISIONS			
PANELLED DOORS WITH WOODEN FRAMES			
PLAN, ELEVATION AND SECTION			
Date	20-06-2022	CHIEF ENGINEER (NAVY)	Sheet No.
Drawn	NK Vikram	VISAKHPATNAM ZONE	1 / 5
Tcd	—		
Ckd	K S Vani		
Scale		DRG NO : CEVZ / 2022 / TD-03	
KSV		Signature	Signature
AAD (Arch)		JT DIR (ARCH)	DIRECTOR (ARCH) FOR CHIEF ENGINEER