



**ELEVATION**

ALW24 - 2400 X 1200  
ALW20 - 2000 X 1200  
ALW18 - 1800 X 1200  
ALW15 - 1500 X 1200  
ALW24A - 2400 X 1500  
ALW20A - 2000 X 1500  
ALW18A - 1800 X 1500  
ALW15A - 1500 X 1500

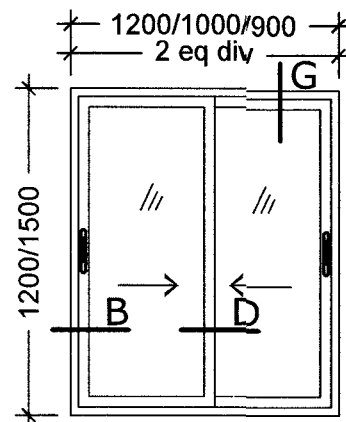


**ELEVATION**

ALW12 - 1200 X 1200  
ALW10 - 1000 X 1200  
ALW9 - 900 X 1200  
ALW12A - 1200 X 1500  
ALW10A - 1000 X 1500  
ALW9A - 900 X 1500

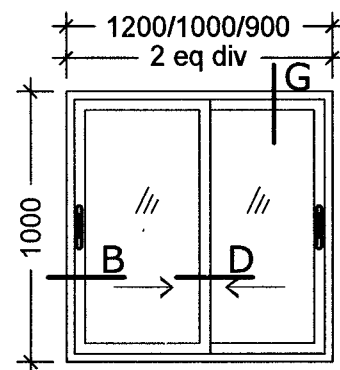


**ELEVATION**

ALWK12 - 1200 X 1000  
ALWK10 - 1000 X 1000  
ALWK9 - 900 X 1000

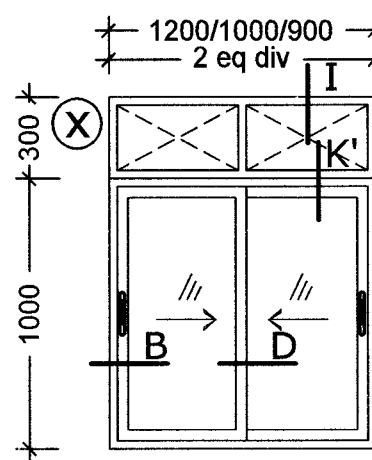


**ELEVATION**

ALWK 12X - 1200 X 1300  
ALWK 10X - 1000 X 1300  
ALWK 9X - 900 X 1300

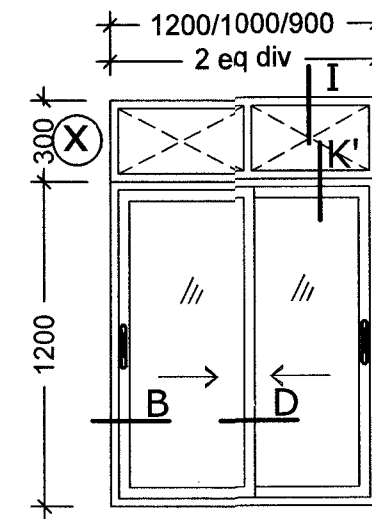


**ELEVATION**

ALW 12X - 1200 X 1500  
ALW 10X - 1000 X 1500  
ALW 9X - 900 X 1500

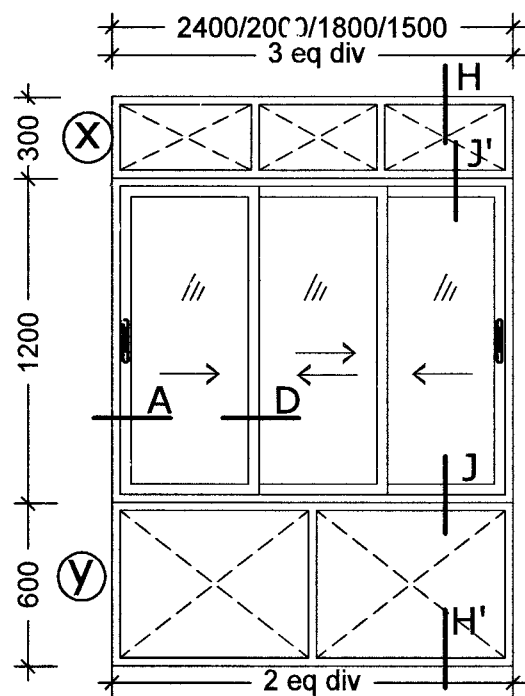


**ELEVATION**

ALW 24XY - 2400 X 2100  
ALW 20XY - 2000 X 2100  
ALW 18XY - 1800 X 2100  
ALW 15XY - 1500 X 2100

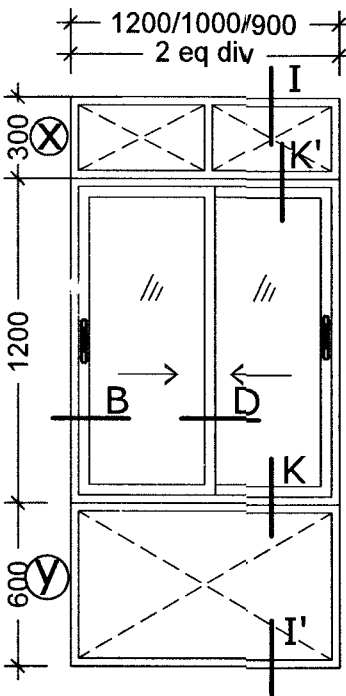


**ELEVATION**

ALW 12XY - 1200 X 2100  
ALW 10XY - 1000 X 2100  
ALW 9XY - 900 X 2100

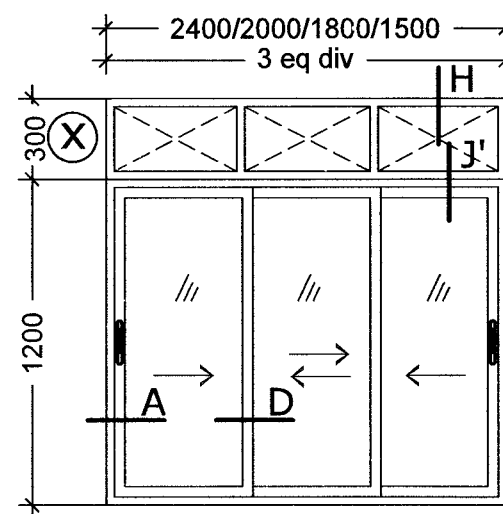


**ELEVATION**

ALW 24X - 2400 X 1500  
ALW 20X - 2000 X 1500  
ALW 18X - 1800 X 1500  
ALW 15X - 1500 X 1500

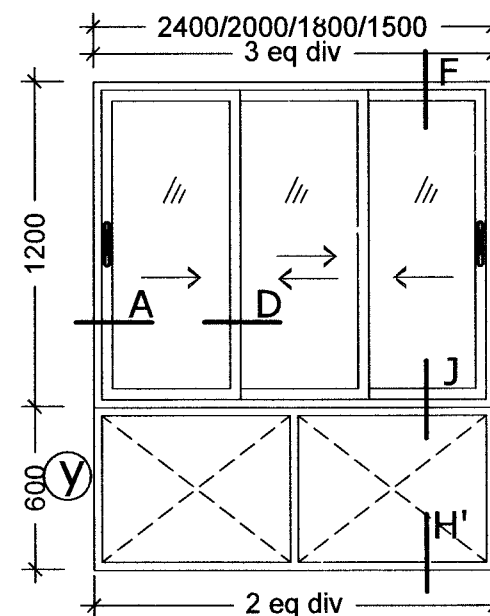


**ELEVATION**

ALW 24Y - 2400 X 1800  
ALW 20Y - 2000 X 1800  
ALW 18Y - 1800 X 1800  
ALW 15Y - 1500 X 1800

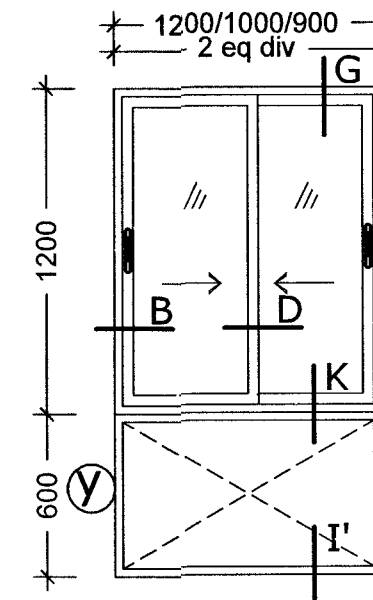


**ELEVATION**

ALW 12Y - 1200 X 1800  
ALW 10Y - 1000 X 1800  
ALW 9Y - 900 X 1800

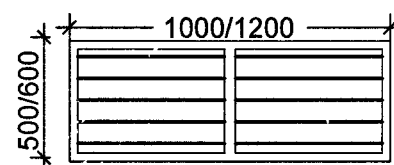


**ELEVATION**

ALV10 - 1000 X 500  
ALV12 - 1200 X 500  
ALV10A - 1200 X 600  
ALV12A - 1200 X 600

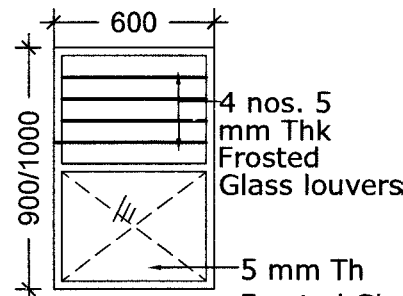


**ELEVATION**

ALW6 - 600 X 900  
ALW6A - 600 X 1000




**ELEVATION**

ALV5 - 500 X 500  
ALV6 - 600 X 500  
ALV5A - 500 X 600  
ALV6A - 600 X 600

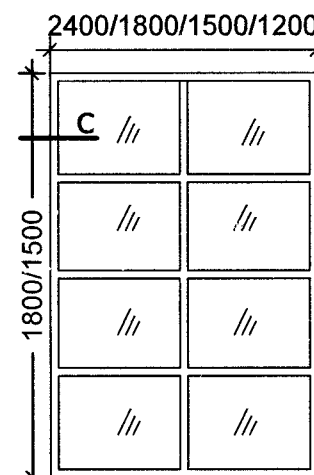

**ELEVATION**

FG 3Y - 2400 X 1800  
FG 3Z - 2400 X 1500  
FG 4Y - 1800 X 1800  
FG 4Z - 1800 X 1500  
FG 5Y - 1500 X 1800  
FG 5Z - 1500 X 1500  
FG 6Y - 1200 X 1800  
FG 6Z - 1200 X 1500



**ELEVATION**

FG 1W - 1500 X 1200  
FG 1X - 1500 X 1000  
FG 2W - 1200 X 1200  
FG 2X - 1200 X 1000

SL NO	NOTES
1.	All dimensions are in millimeter.
2.	All fittings used shall confirm to BIS norms.
3.	Sizes of Window Openings are Masonry Openings. Contractors shall check the dimensions of built-in-openings at site before erection of Window Frames/Shutters.
4.	Aluminium sections incorporated in windows / ventilators shall confirm to designation 63400 given in IS:733.
5.	Fixing of profiles & glazing shall be done conforming IS 1081.
6.	5 mm thick sheet glass shall be used for panels up to 0.5 sqm and for panels exceeding 0.5 sqm, thickness shall be 6 mm.
7.	EPDM gasket shall be confirm to ASTM D:2240 of make OSAKA, AVIGIRI.
8.	Wool pile shall be of 8 to 5 mm thk.
9.	Roller shall be of PVC with s/s ball bearing auto fixing as per shutter manufacturer instruction.
10.	All sliding windows, corner joinery for frame & shutter should be provided with self locating corner connectors ( Die cast)or as per manufactureres instructions.
11.	Window frames shall be fixed to wall/rcc surface with Rawl plug of carbon steel, HFV 8 x 80 of make HILIT1,KLIMAS, KICHER and shall be provided at 300 c/c max. on sides,top and bottom.
CONTINUED_____	
</	