

430

ग्रामनिधी 2025-26

31/1/2026



सत्यमेव जयते

GOVERNMENT OF MAHARASHTRA

PUBLIC WORKS REGION, NASHIK

PUBLIC WORKS CIRCLE, DHULE

ZILHA PARISHAD, DHULE



DETAIL ESTIMATE



NAME OF WORK:- मौजे. वाघोदे ता. शिंदखेडा जि. धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे.

Zilha Parishad, Dhule

Z.P.[Works] Sub-Divn., Shindkheda.

ग्रामनिधी 2025-26

SSR 2022-23

ESTIMATED COST :- 500000.00

ESTIMATE

DIVISION :- Zilha Parishad Dhule
SUB DIVISION :- Z.P.[Works] Sub-Divn., Shindkheda
FUND HEAD :-
MAJOR HEAD :-
MINOR HEAD :-
SERVICE HEAD :-
DEPARMENTAL HEAD :-

ग्रामनिधी 2025-26

ESTIMATE FRAMED IN THE OFFICE OF THE DEPUTY ENGINEER, ZILHA PARISHAD [WORKS] SUB DIVISION OF SHINDKHEDA FOR THE PROBABLE EXPENSED THAT WILL BE INCURRED IN.....

NAME OF WORK :- मॉजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

Estimated cost :- 500000.00

ADMINISTRATIVE APPROVAL UNDER NO.

DATE :-

ADMINISTRATIVE SANCTIONED UNDER NO.

DATE :-

ESTIMATE PREPARED BY SHRI.

A.B.PATIL

Juniour Engineer,
Z.P.[Works] Sub-Divn.,Shindkheda

ESTIMATE CHECKED BY SHRI.

M.D.PARADAKE

Juniour Engineer,
Z.P.[Works] Sub-Divn.,Shindkheda

GENERAL DISCRPTION

The Estimate is framed adopting the Rate S.S.R. of the year 2022-23 Separet Sheet Attached.


A.B.PATIL

Jr./Sectional Engineer,
Z.P.[Works] Sub-Divn.,Shindkheda


K.R.BARE

Deputy Engineer,
Z.P.[Works] Sub-Divn.,Shindkheda

तांत्रिक मंजूरी

NAME OF WORK :- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

संदर्भ १. कनिष्ठ अभियंता, जि. प. बांधकाम उपविभाग, शिंदखेडा यांचे मार्फत प्राप्त अंदाजपत्रक.

२. म. सरपंच, ग्रामपंचायत वाघोदे ता. शिंदखेडा यांच्या मागणी अन्वये.

उपरोक्त कामांस संदर्भीय पत्रान्वये रुपये 500000.00 Rupees Five lakh only and paise nil only

किंमतीस सन २०२२-२३ च्या

ग्रामनिधी 2025-26

कार्यक्रमास समाविष्ट असलेल्या सदर कामाच्या

सविस्तर नकाशे व अंदाजपत्रकास राज्य दरसूची सन २०२५-२६ वर आधारित कामास खालील तांत्रिक टिप्पणीतील अटीच्या अधिन राहून तांत्रिक मान्यता प्रदान करण्यांत येत आहे.

१. तांत्रिक मान्यतेची नोंद या कार्यालयीन तांत्रिक मंजूरीची नोंदवही क्र. PSS/WD/PO/430 / 2026 दिनांक ०९ / ०२ / 2026 अन्वये घेण्यात आली आहे.

२. सदर काम

ग्रामनिधी 2025-26

या लेखा शीर्षखाली प्रस्तावित करण्यात येत आहे.

ग्रामनिधी

तांत्रिक टिप्पणी

१. सदर कामाच्या अंदाजपत्रकातील मोजमापाची व दराची आकडेमोड बरोबर असल्याची खात्री तसेच अंदाज पत्रकातील दर राज्य दरसूची सण 2022 23 च्या मंजूर दराप्रमाणे व रेडबुक प्रमाणे असल्याची उप अभियंता /शाखा अभियंता यांनी पुन्हा एकदा तपासून खात्री करून घ्यावी व ही तपासणी प्रारूप निविदा डी.टी.पी. सादर करण्यापूर्वी करावी.
२. ग्रामपंचायतीचे मंजूर ठरावा मध्ये ज्या गल्लीतील काम नमूद केले असतील त्याच गल्लीत काम करण्यात यावे व तसेच करावयाच्या कामाचे प्रत्येक टप्प्यावरील बाबींची तपासणी वेळोवेळी शाखा अभियंता / उपअभियंता यांना दाखवून तपासणी करून घेण्याची जबाबदारी ग्रामपंचायतीची राहिल.
३. खडी मुरुमाचे ढिग गोळा केल्यानंतर पासरविण्यापूर्वी शाखा अभियंता/ उपअभियंता यांची लेखी परवानगी घेवून मगच पासरविण्याची जबाबदारी ग्रामपंचायतीची राहिल.
४. काम प्रत्यक्ष सुरु करणेपूर्वी कामाचे फोटो, काम सुरु असतानांचे फोटो व काम पूर्ण झाल्यावरचे कामाचे व चाचणी अहवाल दफ्तरी तेवुन त्याची एक जादा प्रत देय पारित करतांना सादर करावे.
५. काम प्रत्यक्ष सुरु करणेपूर्वी सरपंच/ ग्रामसेवक यांनी सदरचे काम काम इतर कोणत्याही योजनेत प्रस्तावित नाही अथवा मंजूर नसले बाबत तसेच इतर योजनेत प्रगतीत किंवा पूर्ण झाले नसल्याबाबत खातर जमा करावी. तसे निघाल्यास त्याची सर्वस्वी जबाबदारी ग्रामपंचायतीची राहिल.
६. काम प्रत्यक्ष सुरु करण्यापूर्वी शाखा अभियंता/ कनिष्ठ अभियंता यांनी सदर कामाचे विस्तृत अंदाजपत्रक तयार करून तांत्रिक मंजूरीसाठी सादर करावे.
७. सदर कामाच्या अंदाजपत्रकातील खडी, मुरुम, डांबर, सिमेंट, लोखंड इत्यादी साहित्याचे खदाणी पासून अंतर कमीत कमी असल्याची शाखा अभियंता यांनी काम सुरु करणेपूर्वी खात्री करावी.
८. काम प्रत्यक्ष सुरु करणेपूर्वी सरपंच/ग्रामसेवक यांनी सदरचे काम कोणत्याही पाटबंधारे /जलविद्युत /पाणीपुरवठा प्रकल्पाच्या जलाशयाखाली जाणार नाही किंवा त्यामुळे बाधित होणार नाही याची सरपंच/ग्रामसेवक यांनी पुन्हा एकदा खात्री करावी. तसेच सदर बांधकाम जागेच्या मालकी हक्काबाबत संबंधित उपभोक्ता विभागाने खात्री करणे ही त्यांची जबाबदारी आहे.
९. सदर रस्ता वन खात्याच्या भागातून जात असल्यास काम सुरु करण्यापूर्वी सक्षम अधिकाऱ्यांकडून मान्यता प्राप्त करून घेण्याची जबाबदारी संबंधित सरपंच/ग्रामसेवक यांची राहिल.
१०. मजबुतीकरणाचे काम सुरु करण्यापूर्वी रस्त्याच्या अस्तित्वातील खडीच्या जाडीची नोंदवही ठेवावी व काम झाल्यावरही नोंद त्याच नोंदवहीत घ्यावी.
११. सदर कामावर कामाची सविस्तर माहितीदर्शविणारा फलक (बोर्ड) लावण्यांत यावा.
१२. सदर कामाची मंजूरी नंतर निवदा या. पं. स्तरावर राबावतांना Technical Bid Open करते वेळी कार्यक्षेत्रातील संबंधित शाखा अभियंता/ कनिष्ठ अभियंता यांचे निदर्शनास आणून देणेत यावे. तसेच या. पं. स्तरावर निवदा प्रक्रिया संपूर्णतः राबावणेची जबाबदारी या. पं. ची राहिल.
१३. शासनाचं वेळोवेळी निर्गमित व परिपत्रके यातील सुचनेचे अनुपालन क्षेत्रीय पातळीवर विचार करण्यांत आला आहे अशी या कार्यालयाची धारणा आहे.
१४. हे उपविभाग अंदाजपत्रक, नकाशे, आराखडा यास बांधील असून, जागे संदर्भात भविष्यात वाद उद्भवल्यास हे कार्यालय किंवा तांत्रिक मान्यता देणारे प्राधिकरण जबाबदार असणार नाहीत. त्याची संपूर्ण जबाबदारी ग्रामपंचायत/ उपभोक्ता विभाग यांची राहिल.

सदर कामावरील खर्च नमूद केलेल्या लेखाशिर्षा खालील उपलब्ध अन्दानातून करण्यांत यावा व मंजूर अन्दानापेक्षा जास्त खर्च करू नये.

पंचायत समिती, शिंदखेडा. ग्रामनिधी
बांधकाम उपविभाग,
जा. क्र. पंसशि / बांध / प्र. अ. / 430 / २०२६
शिंदखेडा, दिनांक. ०९ / ०२ / २०२६

कि.र.बरे

उपअभियंता

जि. प. बांधकाम उपविभाग,
पंचायत समिति, शिंदखेडा.

प्रत :- कनिष्ठ अभियंता, जि. पं. बांधकाम उपविभाग, शिंदखेडा यांना माहितीसाठी व पुढील कार्यवाहीसाठी अग्रेषित.

प्रत :- म. सरपंच/ ग्रामसेवक, ग्राम पंचायत वाघोदे ता. शिंदखेडा यांना माहितीसाठी व पुढील कार्यवाहीसाठी.

NAME OF WORK :- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

सर्वसाधारण वर्णन

१. अंदाजपत्रकीय किंमत रु. 500000.00
२. लेखाशीर्ष / योजना ग्रामनिधी 2025-26

३. प्रस्तावना

शिंदखेडा तालुक्यातील वाघोदे येथील गावांतर्गत घरांच्या रस्त्याच्या पृष्ठभाग मातीचा आहे. पावसामुळे व वाहतुकीमुळे रस्त्यावर खड्डे पडले असून, रस्ता अत्यंत खराब आहे. वाहतुकीच्या व सुरक्षितेसाठी रस्त्यावर पेव्हर ब्लॉक बसवणे कामाची मागणी आहे.

४. प्राधिकरण

सदर कामाची मागणी माननीय यांनी केलेली आहे, तसेच सदर कामाची मागणी सन्माननीय पदाधिकारी लोकप्रतिनिधी व स्थानिक लोकांनी केलेली होती.

त्यानुसार सदर अंदाजपत्रकात खालील प्रमाणे तरतुदी करण्यात आलेल्या आहेत.

- १ 91.25 मी. लांबीस व 3.50 मी. रुंदीस 0.15 मी. जाडीचे रस्त्याचे खोदकाम करणे.
- २ 91.25 मी. लांबीस व 3.50 मी. रुंदीस कठीण मुरुम 0.10 मी. जाडीस करणे.
- ३ प्रस्तावित लांबीत पेव्हर ब्लॉकची बाब प्रस्तावित केलेली आहे.
- ४ 91.25 लांबीस व 3.50 मी. रुंदीस 0.15 मी. जाडीस व 0.15 मी. उंचीस पेव्हर ब्लॉकची कडेस पेव्हर ब्लॉक निघु नयेत म्हणुन १:२:४ मध्ये दोन्ही बाजुस कर्बिग करणे.
- ५ सुचना फलक लावणे.
- ६ इतर आनुषंगिक कामे करणे .


५. खदान

सदर कामासाठी बांधकाम साहित्य खडी, मुरुम, कचकडी हे जवळील तसेच चांगल्या प्रतीचे पुरेसे साहित्य उपलब्ध असलेल्या खदानीचे अंतरे अंदाजपत्रकात प्रस्तावित केलेले आहेत.


६. दरसूची-

अंदाजपत्रकातील दर सन २०२२-२३ च्या सार्वजनिक बांधकाम विभागाच्या मंजूर राज्य दरसूची वर आधारित असून त्यावरील वाहतुकीचे दराचा समावेश अंदाजपत्रकाच्या मुळ दरात करण्यात आलेला आहे तसेच अंदाजपत्रकात क्वालिटी कंट्रोल चार्जस सन २०२४-२५ धरणेत आलेले आहे.

हे उपविभागीय अंदाजपत्रक, नकाशे, आराखडा यास बांधिल असून जागे संदर्भात भविष्यात वाद उद्भवल्यास हे कार्यालय किंवा तांत्रिक मान्यता देणारे प्रदीकरण जबाबदार असणार नाहीत. त्याची संपूर्ण जबाबदारी ग्रामपंचायत / उपभोक्ता विभाग यांची राहिल.


ह. वि. खैरनार

कनिष्ठ / शाखा अभियंता
जि. प. बांधकाम उपविभाग,
पंचायत समिति, शिंदखेडा.


कि.र.बरे

उपअभियंता,
जि. प. बांधकाम उपविभाग,
पंचायत समिति, शिंदखेडा.

NAME OF WORK:- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

Recapulation - Sheet

1	Cost of Work Portion (Without Royalty / Quality Control Charges	Rs.	412673.00
2	0.00		0.00
		Total Rs.	412673.00
3	18% GST Charges	Rs.	74281.00
4	0.5% Labour Insurance	Rs.	2063.00
5	(a) Royalty Charges (FOR SAND) (SSR-202	Rs.	446.00
6	(b) Royalty Charges (FOR OTHER MINERAL) (SSR-2022-23)	Rs.	6905.00
7	Quality Control Testing Charges	Rs.	3850.00
8	0% SQM Charges	Rs.	0
		Total Rs.	500218.00
		i.e.Say Rs,	<u>500000.00</u>



A.B.PATIL


Jr./Sectional Engineer,
Z.P. [Works] Sub-Divn., Shindkheda.


K.R.BARE

Deputy Engineer,
Z.P. [Works] Sub-Divn., Shindkheda.

Technically Sanctioned for Rs. 500000.00/-
Rs. Five Lakh Rupees only.


T.S.No.PSS/WDD/  430 /202G
For 02/202G U* 09/02 202G



Deputy Engineer
Z.P.(W.D.) Sub.Divn.Shindkheda

NAME OF WORK :- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

ABSTRACT SHEET

Quantity	Item No.	Description of Item	Rate	Unit	Amount (Rs.)
35.41	1	Excavation for roadway in earth, soil of all sorts, sand, gravel or soft murum including dressing section to the required grade, camber and side slopes and conveying the excavated materials	119.00	Cu.M	4214.00
31.94	2	Supplying hard murum / kankar at the road site, including conveying and stacking complete.	687.22	Cu.M	21950.00
31.94	3	Spreading hard murum/ soft murum / gravel or kankar for side width complete.	79.00	Cu.M	2523.00
319.38	4	Providing and fixing heavy duty inter locking concrete RUBBER MOULD GLOSSY PAVING BLOCKS of 60 millimeter thickness of having a strength of 400 kilogram / sq.m of approved quality and shape on abed of crushed sand of 25 to 30 millimeter thick	1110.14	Sq.M	354557.00
4.27	5	Providing and laying in PCC M15 grade leveling course below approach slab completed with fully automatic micro processor PLC with SCADA enabled reversible drum type mixer/ concrete batch mix plant (pan mixer) as per drawing and technical	6306.51	Cu.M	26929.00
1.00	6	Providing and fixing Name Board with Lettering and Painting (On Board Or Wall) etc. complete.	2500.00	L/s	2500.00
	(A)	Cost of Work Portion (Without Royalty / Quality control Charges)			412673.00
1.88	7	(a) Royalty charges (FOR SAND) (SSR2022-23)	237.37	Cu.M	446.00
31.94	8	(b) Royalty charges (FOR ALL OTHER MINERALS) (SSR2022-23)	216.18	Cu.M	6905.00
	9	Quality Control Testing Charges			
0.00	(a)	Basic Test	3960.00	job/No.	0.00
0.00	(b)	Fineness Moudulus (Sieve Analysis), Silt & Clay Content	1450.00	job/No.	0.00
0.00	(c)	Comp. Strength	725.00	job/No.	0.00
1.00	(d)	Plastic Index	1230.00	job/No.	1230.00
1.00	(e)	Comp. Strength, Water Absorption	2620.00	job/No.	2620.00
	(B)	Quality Control Testing Charges			3850.00
		(A+7+8+B) Total Rs.			423874.00
		Cost of Work Portion (Without Royalty / Quality control Charges)			412673.00
					0.00
		Total Rs.			412673.00
		18% GST Charges			74281.00
		0.5% labour Ins.			2063.00
		(a) Royalty charges (FOR SAND) (SSR2022-23)			446.00
		(b) Royalty charges (FOR ALL OTHER MINERALS) (SSR2022-23)			6905.00
		Quality Control Testing Charges			3850.00
		0% SQM Charge			0
		Total Rs.			500218.00
		i.e. Say Rs.			500000.00


 A.B. PATIL
 Jr./Sectional Engineer,
 Z.P. [Works] Sub-Divn, Shindkheda


 K.R. BARE
 Deputy Engineer,
 Z.P. [Works] Sub-Divn, Shindkheda

NAME OF WORK :- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

M E S U R M E N T S H E E T

I. No. 1 Excavation for roadway in earth, soil of all sorts, sand, gravel or soft murum including dressing section to the required grade, camber and side slopes and conveying the excavated materials with all lifts upto a lead of 50m, and spreading for embankment or stacking as directed.

					Avg	=		Cu.M
	65%	1.00	91.25	3.50	0.15	=	31.14	Cu.M
For Paver Support		2.00	91.25	0.15	0.15	=	4.11	Cu.M
		2.00	3.50	0.15	0.15	=	0.16	Cu.M
					Total Qty.		<u>35.41</u>	Cu.M ✓

I. No. 2 Supplying hard murum / kankar at the road site, including conveying and stacking complete.

	1.00	91.25	3.50	0.10	=	31.94	Cu.M
					Total Qty.	<u>31.94</u>	Cu.M ✓

I. No. 3 Spreading hard murum/ soft murum / gravel or kankar for side width complete.

Qty.As Per I. No. 2	31.94				=	31.94	Cu.M
					Total Qty.	<u>31.94</u>	Cu.M ✓

I. No. 4 Providing and fixing heavy duty inter locking concrete RUBBER MOULD GLOSSY PAVING BLOCKS of 60 millimeter thickness of having a strength of 400 kilogram / sq.m of approved quality and shape on abed of crushed sand of 25 to 30 millimeter thick including striking joints and cleaning etc. complete. (Using 100%

	1.00	91.25	3.50		=	319.38	Sq.M
					Total Qty.	<u>319.38</u>	Sq.M ✓

I. No. 5 Providing and laying in PCC M15 grade leveling course below approach slab completed with fully automatic micro processor PLC with SCADA enabled reversible drum type mixer/ concrete batch mix plant (pan mixer) as per drawing and technical specification etc. Complete with fine aggregates of required specification (VSI sand finely washed etc.)

For Paver Support	2.00	91.25	0.15	0.15	=	4.11	Cu.M
	2.00	3.50	0.15	0.15	=	0.16	Cu.M
					Total Qty.	<u>4.27</u>	Cu.M ✓

I. No. 6 Providing and fixing Name Board with Lettering and Painting (On Board Or Wall) etc. complete.

	1.00				=	1.00	L/s
					Total Qty.	<u>1.00</u>	L/s ✓

I. No. 7 (a) Royalty charges (FOR SAND) (SSR2022-23)

I.No.	5	CC 1:2:4 M15	4.27	X	0.440		=	1.88	Cu.M
							Total Qty.	<u>1.88</u>	Cu.M ✓

I. No. 8 (b) Royalty charges (FOR ALL OTHER MINERALS) (SSR2022-23)

I.No.	2	Murum	31.94	X	1		=	31.94	Cu.M
							Total Qty.	<u>31.94</u>	Cu.M ✓

I. No. 9 Quality Control Testing Charges

I.No.

	Cement	Basic Test	0.00	=	0.00	job/No.
	Sand	Fineness Moudulus (Sieve Analysis), Silt & Clay Content	0.00	=	0.00	job/No.
5	C.C. M-15 1:2:4	Comp. Strength	4.27	0.00	=	0.00 job/No.
2	Hard Murum	Plastic Index	31.94	1.00	=	1.00 job/No.
4	Concrete Paving Block	Comp. Strength, Water Absorption	319.38	1.00	=	1.00 job/No.
			Total Qty.		<u>2.00</u>	job/No.



A.B.PATIL

Jr./Sectional Engineer,
Z.P. [Works] Sub-Divn, Shindkheda


NAME OF WORK :- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .


Lead Calculation Sheet

Sr. No.	Name of Metal	Lead in Km	Basic Rate	Lead Charges	Deduct Initial Lead	Total	Remark
1	2	3	4	5	6	7	8
1	40MM Metal	5.00	0.00	252.22	0.00	252.22	
2	20MM Metal	10.00	0.00	345.15	0.00	345.15	
3	10/12MM Metal	10.00	0.00	345.15	0.00	345.15	
4	Sand	10.00	0.00	345.15	0.00	345.15	
5	Murum	5.00	0.00	252.22	0.00	252.22	
6	CC Block	10.00	0.00	235.70	0.00	235.70	
7	Cement	5.00	0.00	164.99	0.00	164.99	

Cement Rate per Bag :- 0.00 320

Item No.	Item of Work	Name Of material	Required Quantity	Lead Difference	Lead Charges	Total Lead	Cement in Bags	Cost of Cement	Sand Royalty
1	2	3	4	5	6	7	8	9	10
5	CC 1:2:4 M-15	40mm Metal	0.5600	252.22	141.24	456.51	6.000	0.000	104.44
		20mm Metal	0.2200	345.15	75.93				
		12/10mm Metal	0.1100	345.15	37.97				
		Sand	0.4400	345.15	151.87				
		Cement	0.3000	164.99	49.50				
4	Paving Block	CC Block	0.0600	235.70	14.14	14.14	0.360	0.000	0.00
2	Murum	CC Block	1.0000	252.22	252.22	252.22	0.000	0.000	0.00



A.B.PATIL
 Jr./Sectional Engineer,
 Z.P.[Works] Sub-Divn, Shindkheda



K.R.BARE
 Deputy Engineer,
 Z.P.[Works] Sub-Divn, Shindkheda

NAME OF WORK :- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

Quality Control Testing Charges

Sr. No.	Material / Item	Qty. As per Estimate	Test to be proposed	No. Of Test Required	Test proposed to GOVT. Lab	Rate	Amount
1	Cement		Basic Test		0.00	3960.00	0.00
2	C.C. M-15 1:2:4	4.27	Comp. Strength		0.00	725.00	0.00
3	Hard Murum		Plastic Index		1.00	1230.00	1230.00
4	Concrete Paving Block	319.38	Comp. Strength, Water Absorption		1.00	2620.00	2620.00
						Total	3850.00


A.B. PATIL
Jr./Sectional Engineer,
Z.P. [Works] Sub-Divn, Shindkheda


K.R. BARE
Deputy Engineer,
Z.P. [Works] Sub-Divn, Shindkheda

NAME OF WORK :- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

RATE ANALYSIS

Item No.	Item of Work	DSR. Sr.No. / I No.	Unit	DSR Rate (Rs.)	Deduct PLC with SCADA	Deduct Cost of Cement	Net Rate Col.5-6-7 (Rs.)	Add 10% T.A	Lead Charge Amount	Total Col. (8+9+10) (Rs.)	Add Cost of Cement	Add Cement Diff Dt	Total Col 10+11+12 (Rs.)	Add 0.75% VAT	Total Rate Col.14+15 (Rs.)
1	Excavation for roadway in earth, soil of all sorts, sand, gravel or soft murum including dressing section to the required grade, camber and side slopes and conveying the	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	Supplies hard murum / kankar at the road site, including conveying and stacking complete.	87 / 2.11	Cu.M	119.00			119.00	0.00	0.00	119.00	0.00		119.00		119.00
2	Spreading hard murum/ soft murum / gravel or kankar for side width complete.	102 / 2.29a	Cu.M	435.00		0.00	435.00	0.00	252.22	687.22	0.00		687.22		687.22
3	Providing and fixing heavy duty inter locking concrete RUBBER MOULD GLOSSY PAVING BLOCKS of 60 millimeter thickness of having a strength of 400 kilogram / sq.m of approved quality and shape on abed of crushed	104 / 2.3	Cu.M	79.00			79.00			79.00			79.00		79.00
4	Providing and laying in PCC M15 grade leveling course below approach slab completed with fully automatic micro processor PLC with SCADA enabled reversible drum	1040 / 33.53	Sq.M	1096.00			1096.00		14.14	1110.14			1110.14		1110.14
5	Providing and fixing Name Board with Lettering and Painting (On Board Or Wall) etc. complete.	487 / 14.58	Cu.M	5976.00	126.00	0.00	5850.00	0.00	456.51	6306.51	0.00		6306.51	0.00	6306.51
6	(a) Royalty charges (FOR SAND) (SSR2022-23)		L/s	2500.00			2500.00	0.00	0.00	2500.00	0.00		2500.00		2500.00
7	(b) Royalty charges (FOR ALL OTHER MINERALS) (SSR2022-23)		Cu.M	237.37			237.37			237.37			237.37		237.37
8	Quality Control Testing Charges		Cu.M	216.18			216.18			216.18			216.18		216.18
9			job/No.	0.00			0.00			0.00			0.00		3850.00


A.B.PATIL

Jr./Sectional Engineer,
Z.P.[Works] Sub-Divn, Shindkheda.


K.R.BARE
Deputy Engineer,
Z.P.[Works] Sub-Divn, Shindkheda.

NAME OF WORK :- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

QUARRY CHART

Lead Statement

Sr.No.	Material	Lead in KM	Name of Quarry
1	2	3	4
1	40MM Metal	5.00	
2	20MM Metal	10.00	
3	10/12MM Metal	10.00	
4	Sand	10.00	
5	Murum	5.00	
6	CC Block	10.00	
7	Cement	5.00	

CERTIFICATE

- 1) This is to certify that Quarries are personally inspected by me and
- 2) This is certify that I have personally Verified and Checked The Quarry.
- 3) This is certify that the distance of Quarry show is nearest.
- 4) This is to certify that the lead Calculated are economical.


A.B.PATIL

Jr./Sectional Engineer,
Z.P. [Works] Sub-Divn, Shindkheda




K.R.BARE
Deputy Engineer,
Z.P. [Works] Sub-Divn, Shindkheda

NAME OF WORK :- मौजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

प्रस्तावित कामाचा नकाशा

१. अंदाजपत्रयकिय किंमत :- 500000.00


२. लेखाशीर्ष / योजना :- ग्रामनिधी 2025-26

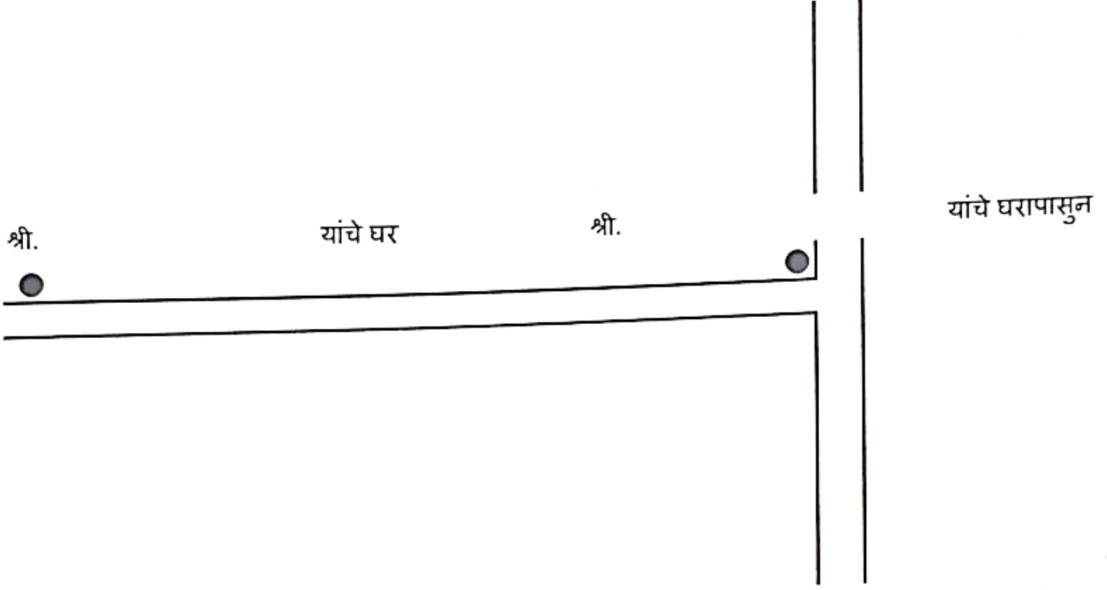

१	श्री.	ते	श्री.	यांचे घर	मीटर
२	श्री.	ते	श्री.	यांचे घर	मीटर
३	श्री.	ते	श्री.	यांचे घर	मीटर
४	श्री.	ते	श्री.	यांचे घर	मीटर
५	श्री.	ते	श्री.	यांचे घर	मीटर
६	श्री.	ते	श्री.	यांचे घर	मीटर
७	श्री.	ते	श्री.	यांचे घर	मीटर
८	श्री.	ते	श्री.	यांचे घर	मीटर
९	श्री.	ते	श्री.	यांचे घर	मीटर
				एकूण लांबी	




A.B.PATIL

Jr./Sectional Engineer,
Z.P.[Works] Sub-Divn, Shindkheda


K.R.BARE

Deputy Engineer,
Z.P.[Works] Sub-Divn, Shindkheda

NAME OF WORK:- मॉजे.वाघोदे ता.शिंदखेडा जि.धुळे येथे गावांतर्गत पेव्हर ब्लॉक बसवणे .

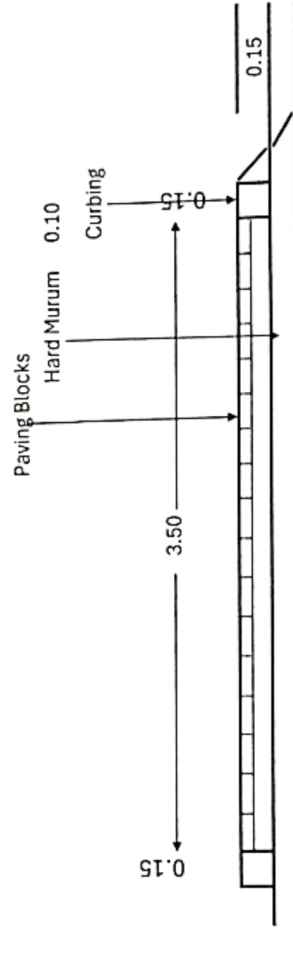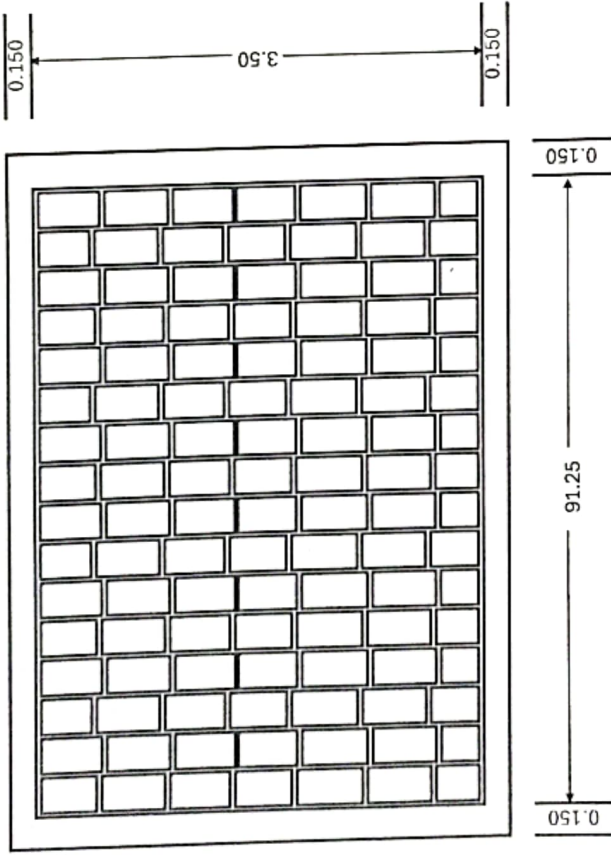

A.B. Patil
A.B. PATIL
Jr./Sectional Engineer,
Z.P.[Works] Sub-Divn., Shindkheda

K.R. BARE
K.R. BARE
Deputy Engineer,
Z.P.[Works] Sub-Divn., Shindkheda