PETRONET LNG LIMITED

ENQUIRY DOCUMENT - MR

(Document No : B862-000-WB-MR-3138-540-RFQ)

इंजीनियर्स इंडिया लिमिटेड (भारत सरकार का उपक्रम) ENGINEERS INDIA LIMITED (A Govt. of India Undertaking)

हर एक काम देश के नाम

Click on the Document Title to go to that section of the document

Table of Contents

Document Number	Rev.	Document Title	Page Number
B862-000-WB-MR-3138-540-RFQ	A	ENQUIRY DOCUMENT - MR	3
B862-000-WB-MR-3138	B	VALVES-CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV	242
B862-000-16-43-ATR-3138	B	ADDITIONAL TECHNICAL REQUIREMENTS FOR VALVES-VALVES- CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV	247
B862-000-6-44-0006-3138	0	VALVE MATERIAL SPECIFICATIONS VALVES- CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV	250
6-44-0052	9	Technical notes for valves	281
6-81-0004	7	Inspection and test plan for valves	304
6-81-0001	4	Standard specification for positive material identification (PMI) at supplier's works	312
6-78-0001	2	Specification For Quality Management System Requirements From Bidders	320
6-78-0003	2	Specification for Documentation Requirement from Suppliers	327
B862-000-16-43-VDR-3138	1	VENDOR DATA REQUIREMENTS FOR VALVES-CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV	338
B862-000-16-43-TCL-3138	B	TECHNICAL COMPLIANCE FORMAT FOR VALVES-CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV	340
B862-000-16-43-DS-3138	A	DATA SHEET FOR SPECIAL REQUIREMENTS OF VALVES	342

BIDDING DOCUMENT NO. JP/B862-000-WB-MR-3138/540

BIDDING DOCUMENT
FOR
VALVES-CRYOGENIC TOPENTRY BALL & BFV & SPECIAL BFV
FOR

PDH PP PLANT WITH ETHANE AND PROPANE HANDLING FACILITIES PROJECT AT DAHEJ, GUJARAT

Prepared & Issued by:

इंजीनियर्स इंडिया लिमिटेड
(भारत सरकार का उपक्रम)
ENGINEERS INDIA LIMITED
(A Govt. of India Undertaking)

MASTER INDEX

NAME OF WORK : VALVES-CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV

BIDDING DOCUMENT NO. : JP/B862-000-WB-MR-3138/540

COMMERCIAL SECTION	
S. NO.	**DESCRIPTION**
1.	COVER PAGE
2.	MASTER INDEX
3.	INVITATION FOR BIDS
	i) ANNEXURE-I TO IFB: DECLARATION FOR AVAILABILITY OF UNUTILIZED LINE OF CREDIT
	ii) ANNEXURE-II TO IFB: FINANCIAL DETAILS
	iii) ANNEXURE-III TO IFB TO RFQ: NDA SUBMISSION METHODOLOGY-**NOT APPLICABLE**
	iv) ANNEXURE-IV TO IFB: NON-DISCLOSURE AGREEMENT FORMAT-**NOT APPLICABLE**
4.	BID DATA SHEET
5.	BIDDING FORMS
6.	AGREED TERMS & CONDITIONS (INDIGENOUS & FOREIGN)
7.	INSTRUCTION TO BIDDERS (ITB)
	ANNEXURES TO ITB
	i. ANNEXURE-I TO ITB – E-TENDERING METHODOLOGY
	ii. ANNEXURE-II TO ITB – RESTRICTIONS ON PROCUREMENT FROM BIDDERS FROM COUNTRY(IES) SHARING LAND BORDER WITH INDIA
	iii. ANNEXURE-III TO ITB – INTEGRITY PACT
	iv. ANNEXURE-IV TO ITB – REVERSE AUCTION GUIDELINES -**NOT APPLICABLE**
	v. ANNEXURE-V TO ITB – EMD FORMAT
	vi. ANNEXURE-VI TO ITB – INSTRUCTIONS FOR PAYMENT OF EMD THROUGH PLL ONLINE EMD COLLECTION PORTAL
8.	SPECIAL CONDITIONS OF CONTRACT FOR GOODS
	ANNEXURES TO SPC
	i. ANNEXURE-I: TERMS & CONDITIONS FOR INDIAN SOURCED COMPONENTS BY FOREIGN BIDDER
	ii. ANNEXURE-II: TAXES & DUTIES
	iii. ANNEXURE-III: TERMS & CONDITIONS FOR SUPERVISION OF ERECTION, TESTING & COMMISSIONING/TRAINING AT SITE/HAZOP STUDY-**NOT APPLICABLE**
	iv. ANNEXURE-IV: TERMS & CONDITIONS FOR INSTALLATION / SITE WORK **-NOT APPLICABLE**
	v. ANNEXURE-V: TERMS & CONDITIONS FOR ANNUAL MANTAINENANCE CONTRACT (AMC) **-NOT APPLICABLE**
	vi. ANNEXURE-VI: TERMS & CONDITIONS FOR TRAINING AT OEM WORKS - **NOT APPLICABLE**
	vii. ANNEXURE-VII: PROFORMA FOR ADVANCE REPAYMENT BANK GUARANTEE
	viii. ANNEXURE-VIII: FORMAT FOR CONTRACT PERFORMANCE BANK GUARANTEE
	ix. ANNEXURE-IX: PROFORMA OF SURETY BOND FOR CONTRACT PERFORMANCE SECURITY
	x. ANNEXURE-IX: PROFORMA OF SURETY BOND FOR BID SECURITY/EMD
9.	GENERAL PURCHASE CONDITIONS
10.	PACKING, MARKING, SHIPPING AND DOCUMENTATION SPECIFICATIONS (INDIGENOUS AND IMPORTS)
11.	PRICE SCHEDULE (BOQ)
TECHNICAL SECTION	
MR No. B862-000-WB-MR-3138	

NOTICE FOR INVITATION FOR BIDS (IFB) FOR
"VALVES-CRYOGENIC TOPENTRY BALL & BFV & SPECIAL BFV"
FOR PDH PP PLANT WITH ETHANE AND PROPANE HANDLING FACILITIES PROJECT
OF
PETRONET LNG LIMITED, DAHEJ (GUJARAT)
(BIDDING DOCUMENT NO.: JP/B862-000-WB-MR-3138/540)
(GLOBAL COMPETITIVE BIDDING)

1. INTRODUCTION

Petronet LNG Limited (PLL) is a public limited company incorporated in April 1998 in India under the provision of the (Indian) Companies Act 1956, having registered office at4th Floor, Tower I, World Trade Centre, Nauroji Nagar, New Delhi, 110 029, India. PLL owns & operates LNG Terminal at Dahej in the state of Gujarat, India with the name plate capacity of 17.5 MMTPA. In view of expected growth in demand for petrochemical products in India and to remain competitive in the market with product self-sufficiency, Petronet LNG Ltd. (PLL) has planned to setup Petrochemical (PDH-PP) plant integrated with Ethane and Propane import facility at Dahej. The proposed Petrochemical Complex will use propane as a feedstock, dehydrogenate it to form propylene in a Propane Dehydrogenation Unit (PDH) and further polymerize to produce Polypropylene in a PP unit targeting import substitution.

Engineers India Limited (EIL) has been engaged by PLL for Consultancy services for 750 KTA PDH Plant and 500 KTA PP plant with Ethane and Propane Storage and Handling Facility at Dahej Petrochemical complex.

E-bids under single stage two bid system are requested from competent bidders, with sound technical and financial capabilities meeting the Qualification Criteria stated in clause no. 3 below for the captioned item based on the requirement specified in this IFB and in total compliance to technical specifications, scope and terms & conditions of bidding documents.

2. BRIEF SCOPE OF WORK:

Scope includes manufacturing, inspection, testing and supply of "VALVES- CRYOGENIC TOP ENTRY BALL & BUTTERFLY & SPECIAL BUTTERFLY" in PLL Dahej expansion project as per Material Requisition No. "B862-000-WB-MR-3138". For other details, refer Bid Document.

3. BIDDER QUALIFICATION CRITERIA (BQC):

3.1. EXPERIENCE CRITERIA (TECHNICAL) FOR VALVES – CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV:

Bidder QUALIFICATION CRITERIA (BQC) TECHNICAL (For BALL VALVES):

3.1.1. **MR Sr. no. 1 to 18, 20 to 23, 26 to 33, 41 to 45 & 48 to 52 (Top entry, Cryogenic, Full port, Ball valve, 150#, 600#, 900# &1500#, Forged/Cast Stainless Steel)**

3.1.1.1. The Bidder shall have manufactured, inspected, tested and supplied forged or cast stainless steel (of any grade) cryogenic, **top entry**, ball valve equal or higher in terms of size & rating, qualifying the valve being quoted as per clause 3.1.1.2 to 3.1.1.4 below for cryogenic services in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing/ (Note-1) during the last Seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered.

3.1.1.2. Bidder shall have conducted cryogenic test for the forged or cast stainless steel (of any grade) cryogenic, **top entry**, ball valve equal or higher in terms of size & rating as per BS 6364/BS EN ISO 28921-2 at test temperature (-)196 deg C. Tests should have been witnessed and certified by any third-party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.1.3. Cryogenic tests carried out on a particular size of one type of valve, pressure rating and material shall qualify all sizes equal to and below the test valve size for the same type, pressure rating and material.

In case of austenitic stainless steel, any one grade would qualify for all other grades of austenitic stainless steel.

3.1.1.4. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.1.5. For qualification, all the above clauses (Cl. 3.1.1, 3.1.1.1 to 3.1.1.4) shall be read in conjunction.

3.1.2. **MR Sr. no. 19 (Top entry, Cryogenic Full port, Ball valve, 150#, Forged/Cast Stainless Steel)**

3.1.2.1. The Bidder shall have manufactured, inspected, tested and supplied forged or cast stainless steel (of any grade) cryogenic, top entry, ball valve in size 12" or higher & rating 150# or above, qualifying the valve being quoted as per clause 3.1.2.2 & 3.1.2.3 below for cryogenic services in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing, / (Note-1) during the last Seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered

3.1.2.2. Bidder shall have conducted cryogenic test for forged or cast stainless steel (of any grade) cryogenic, **top entry**, ball valve in size 12" or higher & rating 150# or above as per BS 6364/BS EN ISO 28921-2 at test temperature (-)196 deg.C. Tests should have been witnessed and certified by any third-party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.2.3. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.2.4. For qualification, all the above clauses (Cl. 3.1.2, 3.1.2.1 to 3.1.2.3) shall be read in conjunction.

3.1.3. **MR Sr. no. 24 & 25 (Top entry, Cryogenic, Full port, Ball valve, 600#, Forged/Cast Stainless Steel)**

3.1.3.1. The Bidder shall have manufactured, inspected, tested and supplied forged or cast stainless steel (of any grade), cryogenic, **top entry** ball valve in size 8" or higher & rating 600# or above, qualifying the valve being quoted as per clause 3.1.3.2 to 3.1.3.3 below for cryogenic services in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing/ (Note-1) during the last seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered.

3.1.3.2. Bidder shall have conducted cryogenic test for forged or cast stainless steel (of any grade), cryogenic, **top entry** ball valve in size 8" or higher & rating 600# or above as per BS 6364/BS EN ISO 28921-2 at test temperature (-)196 deg. C. Tests should have been witnessed and certified by any third-party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.3.3. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.3.4. For qualification, all the above clauses (Cl. 3.1.3, 3.1.3.1 to 3.1.3.3) shall be read in conjunction.

3.1.4. **For MR Sr. no. 34 to 36 & 46 to 47 (Top entry, Cryogenic, Full port, Ball valve, 900#, Forged/Cast Stainless Steel)**

3.1.4.1. The Bidder shall have manufactured, inspected, tested and supplied forged or cast stainless steel (of any grade), cryogenic, **top entry** ball valve in size 10" or higher & rating 900# or above, qualifying the valve being quoted as per clause 3.1.4.2 & 3.1.4.3 below for cryogenic services in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing/ (Note-1) during the last seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered.

3.1.4.2. Bidder shall have conducted cryogenic test for forged or cast stainless steel (of any grade), cryogenic, **top entry** ball valve in size 10" or higher & rating 900# or above as per BS 6364/BS EN ISO 28921-2 at test temperature (-)196 deg. C. Tests should have been witnessed and certified by any third-party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.4.3. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.4.4. For qualification, all the above clauses (Cl. 3.1.4, 3.1.4.1 to 3.1.4.3) shall be read in conjunction.

3.1.5. **MR Sr. no. 37 to 40 (Top entry, Cryogenic, Full port, Ball valve, 900#, Forged/Cast Stainless Steel)**

3.1.5.1. The Bidder shall have manufactured, inspected, tested and supplied forged or cast stainless steel (of any grade), cryogenic, **top entry**, ball valve in size 18" or higher & rating 900# or above, qualifying the valve being quoted as per clause 3.1.5.2 & 3.1.5.3 below for cryogenic services in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing/ (Note-1) during the last Seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered.

3.1.5.2. Bidder shall have conducted cryogenic test for forged or cast stainless steel (of any grade), cryogenic, **top entry**, ball valve in size 18" or higher & rating 900# or above as per BS 6364/BS EN ISO 28921-2 at test temperature (-)196 deg. C. Tests should have been witnessed and certified by any third-party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.5.3. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.5.4. For qualification, all the above clauses (Cl. 3.1.5, 3.1.5.1 to 3.1.5.3) shall be read in conjunction.

BIDDER QUALIFICATION CRITERIA (BQC) TECHNICAL (For BUTTERFLY VALVES)

3.1.6. **For MR Sr. no. 53 (Triple offset butterfly valve, 150#, Cast Low Temperature Carbon Steel)**

3.1.6.1. The Bidder shall have manufactured, inspected, tested and supplied cast LTCS/ Stainless steel (of any grade) triple offset butterfly valve equal or higher in terms of size & rating, qualifying the valve being quoted as per clause 3.1.6.2 & 3.1.6.3 below for cryogenic services in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing/ (Note-1) during the last Seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered.

3.1.6.2. Bidder shall have conducted cryogenic test for cast LTCS/ Stainless steel (of any grade), triple offset butterfly valve equal or higher in terms of size & rating as per BS 6364/BS EN ISO 28921-2. Tests should have been witnessed and certified by any third-party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.6.3. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.6.4. For qualification, all the above clauses (Cl. 3.1.6, 3.1.6.1 to 3.1.6.3) shall be read in conjunction

3.1.7. **For MR Sr. no. 54 (Top entry, Cryogenic, triple offset Butterfly valve, 150#, Cast Stainless Steel)**

3.1.7.1. The Bidder shall have manufactured, inspected, tested and supplied cast stainless steel (of any grade), Top entry, cryogenic triple offset butterfly valve in size 36" or higher & rating 150# or above, qualifying the valve being quoted as per clause 3.1.7.2 to 3.1.7.3 below for cryogenic services in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing/ (Note-1) during

the last Seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered.

3.1.7.2. Bidder shall have conducted cryogenic test for cast stainless steel (of any grade), Top entry, cryogenic triple offset butterfly valve in size 36" or higher & rating 150# or above as per BS 6364/BS EN ISO 28921-2 at test temperature (-)196 deg. C. Tests should have been witnessed and certified by any third-party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.7.3. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.7.4. For qualification, all the above clauses (Cl. 3.1.7, 3.1.7.1 to 3.1.7.3) shall be read in conjunction.

3.1.8. **For MR Sr. no. 55 (Cryogenic, Triple offset butterfly valve, 300#, Cast Stainless steel)**

3.1.8.1. The Bidder shall have manufactured, inspected, tested and supplied cast stainless steel (of any grade), cryogenic triple offset butterfly valve equal or higher in terms of size & rating, qualifying the valve being quoted as per clause 3.1.8.2 to 3.1.8.3 below for cryogenic services in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing/ (Note-1) during the last Seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered.

3.1.8.2. Bidder shall have conducted cryogenic test for cast stainless steel (of any grade), cryogenic triple offset butterfly valve equal or higher in terms of size & rating as per BS 6364/BS EN ISO 28921-2 at test temperature (-)196 deg. C. Tests should have been witnessed and certified by any third-party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.8.3. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.8.4. For qualification, all the above clauses (Cl. 3.1.8, 3.1.8.1 to 3.1.8.3) shall be read in conjunction

3.1.9. **For MR Sr. no. 56 (Triple offset butterfly valve, 900#, Cast Carbon Steel)**

3.1.9.1. The Bidder shall have manufactured, inspected, tested and supplied cast Cabon steel/alloy steel/stainless steel or higher MOC triple offset butterfly valve of size 20" or higher & rating 900# or above, in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing/ (Note-1) during the last Seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered.

3.1.9.2. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.9.3. For qualification, all the above clauses (Cl. 3.1.9, 3.1.9.1 to 3.1.9.2) shall be read in conjunction.

3.1.10. **For MR Sr. no. 57 (Cryogenic, Top entry, Triple offset butterfly valve, 900#, Cast Stainless steel)**

3.1.10.1. The Bidder shall have manufactured, inspected, tested and supplied cast stainless steel (of any grade) top entry, triple offset butterfly valve 20" or higher & rating 900# or above, qualifying the valve being quoted as per clause 3.1.10.2 to 3.1.10.3 below for cryogenic services in LNG handling facilities / Refinery/ Petrochemicals/ Metallurgical/ Oil and Gas Processing/ (Note-1) during the last Seven (7) years to be reckoned from the bid due date. In case of extended bid submission date, original bid submission date shall be considered.

3.1.10.2. Bidder shall have conducted cryogenic test for cast stainless steel (of any grade), top entry, triple offset butterfly valve of size 20" or higher & rating 900# or above as per BS 6364/BS EN ISO 28921-2

at test temperature (-)196 deg. C. Tests should have been witnessed and certified by any third-party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.10.3. Bidder shall have conducted fire safe test qualifying the valve being quoted as per API 607 / API 6FA / BS EN ISO 10497.

3.1.10.4. For qualification, all the above clauses (Cl. 3.1.10, 3.1.10.1 to 3.1.10.3) shall be read in conjunction.

NOTE-1:
Other sectors (Chemicals, Fertilizer, power and Specialty Chemicals) can also be considered, if items are designed, manufactured and tested in accordance with ASME/API or equivalent codes meeting EIL engineering specs requirements as a minimum.

3.2. FINANCIAL CRITERIA:

The bidder must satisfy the following financial requirements, as per their audited balance sheets.

3.2.1 ANNUAL TURNOVER

The Minimum Annual Turnover (ATO) of the bidder during any of the preceding 03 (Three) financial years from the bid due date shall be

MR Item Details	For Indian Bidder (in INR)	For Foreign Bidder (in USD)
MR Item No. 1	516,000.00	5,600.00
MR Item No. 2	7,911,000.00	85,600.00
MR Item No. 3	3,036,000.00	32,800.00
MR Item No. 4	1,136,000.00	12,300.00
MR Item No. 5	1,657,000.00	17,900.00
MR Item No. 6	511,000.00	5,500.00
MR Item No. 7	223,000.00	2,400.00
MR Item No. 8	288,000.00	3,100.00
MR Item No. 9	119,000.00	1,300.00
MR Item No. 10	119,000.00	1,300.00
MR Item No. 11	179,000.00	1,900.00
MR Item No. 12	184,000.00	2,000.00
MR Item No. 13	184,000.00	2,000.00
MR Item No. 14	496,000.00	5,400.00

MR Item Details	For Indian Bidder (in INR)	For Foreign Bidder (in USD)
MR Item No. 15	248,000.00	2,700.00
MR Item No. 16	878,000.00	9,500.00
MR Item No. 17	1,319,000.00	14,300.00
MR Item No. 18	5,282,000.00	57,200.00
MR Item No. 19	2,093,000.00	22,600.00
MR Item No. 20	20,000.00	200.00
MR Item No. 21	114,000.00	1,200.00
MR Item No. 22	50,000.00	500.00
MR Item No. 23	501,000.00	5,400.00
MR Item No. 24	1,101,000.00	11,900.00
MR Item No. 25	744,000.00	8,100.00
MR Item No. 26	84,000.00	900.00
MR Item No. 27	327,000.00	3,500.00
MR Item No. 28	6,850,000.00	74,100.00
MR Item No. 29	169,000.00	1,800.00
MR Item No. 30	17,712,000.00	191,600.00
MR Item No. 31	1,424,000.00	15,400.00
MR Item No. 32	1,984,000.00	21,500.00
MR Item No. 33	754,000.00	8,200.00
MR Item No. 34	33,644,000.00	364,000.00
MR Item No. 35	27,037,000.00	292,500.00
MR Item No. 36	33,391,000.00	361,300.00

MR Item Details	For Indian Bidder (in INR)	For Foreign Bidder (in USD)
MR Item No. 37	59,014,000.00	638,500.00
MR Item No. 38	9,836,000.00	106,400.00
MR Item No. 39	42,517,000.00	460,000.00
MR Item No. 40	108,212,000.00	1,170,900.00
MR Item No. 41	1,448,000.00	15,700.00
MR Item No. 42	3,804,000.00	41,200.00
MR Item No. 43	1,478,000.00	16,000.00
MR Item No. 44	2,549,000.00	27,600.00
MR Item No. 45	1,275,000.00	13,800.00
MR Item No. 46	11,601,000.00	125,500.00
MR Item No. 47	2,321,000.00	25,100.00
MR Item No. 48	94,000.00	1,000.00
MR Item No. 49	1,493,000.00	16,200.00
MR Item No. 50	620,000.00	6,700.00
MR Item No. 51	1,086,000.00	11,800.00
MR Item No. 52	283,000.00	3,100.00
MR Item No. 53	2,688,000.00	29,100.00
MR Item No. 54	31,129,000.00	336,800.00
MR Item No. 55	24,155,000.00	261,400.00
MR Item No. 56	8,055,000.00	87,200.00
MR Item No. 57	30,058,000.00	325,200.00

Note:

i. Turnover shall be taken as Revenue from Operations as stated in Financial Statement of

the bidder, excluding other income. GST (Goods & Services Tax) if applicable shall also be excluded.

ii. A bidder quoting for one item shall meet the Annual Turnover criteria corresponding to that item.

iii. In case of a bidder quoting for multiple items, Bidder shall meet the Annual Turnover criteria on cumulative basis as per above table.

3.2.2 WORKING CAPITAL (WC)

The Minimum working capital of the bidder as per the immediate preceding year's Audited financial statement shall be

MR Item Details	For Indian Bidder (in INR)	For Foreign Bidder (in USD)
MR Item No. 1	103,000.00	1,100.00
MR Item No. 2	1,582,000.00	17,100.00
MR Item No. 3	607,000.00	6,600.00
MR Item No. 4	227,000.00	2,500.00
MR Item No. 5	331,000.00	3,600.00
MR Item No. 6	102,000.00	1,100.00
MR Item No. 7	45,000.00	500.00
MR Item No. 8	58,000.00	600.00
MR Item No. 9	24,000.00	300.00
MR Item No. 10	24,000.00	300.00
MR Item No. 11	36,000.00	400.00
MR Item No. 12	37,000.00	400.00
MR Item No. 13	37,000.00	400.00
MR Item No. 14	99,000.00	1,100.00
MR Item No. 15	50,000.00	500.00
MR Item No. 16	176,000.00	1,900.00
MR Item No. 17	264,000.00	2,900.00
MR Item No. 18	1,056,000.00	11,400.00

MR Item Details	For Indian Bidder (in INR)	For Foreign Bidder (in USD)
MR Item No. 19	419,000.00	4,500.00
MR Item No. 20	4,000.00	40.00
MR Item No. 21	23,000.00	200.00
MR Item No. 22	10,000.00	100.00
MR Item No. 23	100,000.00	1,100.00
MR Item No. 24	220,000.00	2,400.00
MR Item No. 25	149,000.00	1,600.00
MR Item No. 26	17,000.00	200.00
MR Item No. 27	65,000.00	700.00
MR Item No. 28	1,370,000.00	14,800.00
MR Item No. 29	34,000.00	400.00
MR Item No. 30	3,542,000.00	38,300.00
MR Item No. 31	285,000.00	3,100.00
MR Item No. 32	397,000.00	4,300.00
MR Item No. 33	151,000.00	1,600.00
MR Item No. 34	6,729,000.00	72,800.00
MR Item No. 35	5,407,000.00	58,500.00
MR Item No. 36	6,678,000.00	72,300.00
MR Item No. 37	11,803,000.00	127,700.00
MR Item No. 38	1,967,000.00	21,300.00
MR Item No. 39	8,503,000.00	92,000.00
MR Item No. 40	21,642,000.00	234,200.00

MR Item Details	For Indian Bidder (in INR)	For Foreign Bidder (in USD)
MR Item No. 41	290,000.00	3,100.00
MR Item No. 42	761,000.00	8,200.00
MR Item No. 43	296,000.00	3,200.00
MR Item No. 44	510,000.00	5,500.00
MR Item No. 45	255,000.00	2,800.00
MR Item No. 46	2,320,000.00	25,100.00
MR Item No. 47	464,000.00	5,000.00
MR Item No. 48	19,000.00	200.00
MR Item No. 49	299,000.00	3,200.00
MR Item No. 50	124,000.00	1,300.00
MR Item No. 51	217,000.00	2,400.00
MR Item No. 52	57,000.00	600.00
MR Item No. 53	538,000.00	5,800.00
MR Item No. 54	6,226,000.00	67,400.00
MR Item No. 55	4,831,000.00	52,300.00
MR Item No. 56	1,611,000.00	17,400.00
MR Item No. 57	6,012,000.00	65,000.00

Notes:

i) A bidder quoting for one item shall meet the Working Capital criteria corresponding to that item.

ii) In case of a bidder quoting for multiple items, Bidder shall meet the Working Capital criteria on cumulative basis as per above table.

Working Capital calculation: Working Capital shall be Current Assets minus Current Liabilities.

Where Current Assets means Asset when it satisfies any of the following criteria:

a) It is expected to be realized in, or is intended for sale or consumption in, the company's normal operating cycle*;

b) It is held primarily for the purpose of being traded;

c) It is expected to be realized within twelve months after the reporting date; or

d) It is cash or cash equivalent unless it is restricted from being exchanged or used to settle a liability for at least twelve months after the reporting date.

Where Current Liabilities means Liabilities when it satisfies any of the following criteria:

a) It is expected to be settled in the company's normal operating cycle*;

b) It is held primarily for the purpose of being traded;

c) It is due to be settled within twelve months after the reporting date; or

d) The company does not have an unconditional right to defer settlement of the liability for at least twelve months after the reporting date. Terms of a liability that could, at the option of the counterparty, result in its settlement by the issue of equity instruments do not affect its classification.

*An operating cycle is the time between the acquisition of assets for processing and their realization in cash or cash equivalents. Where the normal operating cycle cannot be identified, it is assumed to have duration of Twelve Months.

In case, Bidder is unable to meet the WC requirement as above, the Bidder may supplement the WC with a **Fund based Line of Credit (LOC)** from any scheduled bank in India or a commercial bank having net worth more than INR 1000 Million or equivalent USD (as per bank's latest audited financial statements). In such a case, Bidder shall furnish a declaration from the bank for availability of **unutilized fund-based line of credit for the shortfall in WC** below the specified WC value, in the format (enclosed as **Annexure-I to IFB**). **The letter (dated any date between the tender floatation and final bid due date) shall provide the status of Fund based Line of Credit as on any date between the date of tender floatation and final Bid Due Date.**

In this regard, following shall be noted:

a) Currency for seeking the amount of line of credit from the bank shall be in the currency as per the IFB/ Bidding Document requirement.

b) Declaration letter for the shortfall of working capital shall be from a single bank only. Letters from multiple banks will not be acceptable. However, in case a Bidder submits Letters from multiple banks, the highest LOC amongst all the Banks shall only be considered for BQC evaluation. Further, banking syndicate will also be allowed wherein a group of banks can jointly underwrite and jointly lend money to the bidder. In case of banking syndicate also, declaration letter for meeting the working capital shall be from a single bank only.

c) If any bidder is not meeting the working capital requirement from its audited Financial Statement, Bidder has the option to submit the line of Credit certificate from their banker along with the bid. After opening of bids, in case the bidder is not meeting the required working capital amount even from the line of credit certificate submitted along with the bid, no further opportunity shall be given to bidder to modify or replace the certificate by any subsequent certificate from the same bank or any other bank.

However, if the bank certificate submitted in the bid is carrying certain inaccuracies in the language of the certificate as per the format enclosed in the tender, bidder shall be asked to clarify or make corrections in the language of the bank letter. In case of such clarifications/corrections, the same shall be submitted as an amendment to the line of credit from the bank submitted in the bid. In no case alterations in the amount of line of Credit as already submitted in the bid shall be allowed.

d) If any bidder is not meeting the working capital requirement as per its audited Financial Statement and also has not submitted the required line of credit certificate from bank in the bid, the bidder shall be rejected and no opportunity to submit the certificate shall be provided to bidder.

e) Wherever bids are obtained through e-tendering, bidder shall be required to upload the copy of line of credit certificate along with the bid on the e-tendering portal itself, duly signed by a digital signature. The bidders shall not be required to submit the original of the line of credit certificate to EIL separately.

Example: If the WC required is Rs. 50 Crore and the Bidder has WC of Rs 30 Crore as per the Audited Financial Statement, Bidder needs to submit a LOC for the balance Rs. 20 Crore. Further, if the Working Capital required is Rs. 50 Crore and the Bidder has WC of (-) Rs 10 Crore as per the Audited Financial Statement, Bidder needs to submit LOC for Rs. 60 Crore to meet the BQC requirement.

3.2.3 NETWORTH REQUIREMENT

Net Worth of the Bidder as per the immediate preceding year's Audited financial statement shall be positive.

Net worth calculation: Net-worth means paid up share capital, Share Application Money pending allotment* and reserves# less accumulated losses and deferred expenditure to the extent not written off. Net worth shall be calculated using the following formula:

Reserves to be considered for the purpose of net-worth shall be all reserves created out of the profits and securities premium account but shall not include reserves created out of revaluation of assets, write back of depreciation and amalgamation.

*Share Application Money pending allotment will be considered only in respect of share to be allotted.

Accordingly, the definition of net-worth shall be as follows:

Paid up share capital	XXXX
Add: Share application money pending allotment	XXXX
Add: Reserves (as defined above)	XXXX
Less: Accumulate Losses	(XX)
Less: Deferred revenue expenditure to the extend not written off	(XX)
Net-worth	**XXXX**

3.2.4 The financial statements stated above shall be reviewed in respect of financial criteria under Bidder Qualification Criteria. However, in case any matter is referred in the "notes to accounts and schedules referred in balance sheet and profit & loss account then, only quantified qualified/ adverse/ disclaimer opinion in the statutory auditor's reports, if any, having impact on financial criteria shall be considered for evaluation.

3.3 DOCUMENTATION AND DATA REQUIRED WITH THE BID:

3.3.1 For Experience Criteria (Technical) as per Clause no. 3.1 above

Bidders shall fill and submit the Experience Record Pro-forma (ERP) enclosed, with the bidding document along with associated documentary evidence to establish that the bidder meets the Bidder Qualification Criteria.

Experience of only the Bidding entity shall be considered. A job executed by a Bidder for its own plant/projects shall not be considered as experience for the purpose of meeting the Qualification Criteria of the Enquiry document.

However, **Jobs executed for Subsidiary/ Fellow subsidiary / Holding company shall be considered as experience for the purpose of meeting BQC, subject to submission of additional document towards "tax paid invoice(s) duly certified by Statutory Auditor of the Bidder or consolidated statement issued by Statutory Auditor of the Bidder towards payments of statutory tax" in support of the job executed for Subsidiary/ Fellow subsidiary/ Holding company.**

In case referred Project falls under "No Tax Area" (like SEZ), Bidder can submit certificate from their Statutory Auditor to this effect in place of Tax paid invoice.

Chartered Accountant (CA) (in place of Statutory Auditor) is acceptable where audited accounts are not mandatory as per law for latest financial year. Also CA shall not be an employee/ Director and not having any interest in the Bidder's company/Firm.

3.3.2 For Financial Criteria as per clause no. 3.2 above:

Following documents shall be furnished by the bidder in support clause no. 3.2 above:

a) Complete Audited Balance Sheet and Profit and Loss Statement along with auditor report and all other schedule / notes to Balance sheet and Profit & Loss account for the immediate three preceding financial years as final on bid due date.

AND

b) Financial Details of Bidder, from the Statutory Auditor (SA)/ Chartered Accountant (CA) (*), on the letter head of Statutory Auditor/CA(*) (in the format enclosed as **Annexure-II(A)#.**

OR

Financial Details of Bidder, on the letter head of Bidder, duly certified by Statutory Auditor/ CA(*)(in the format enclosed as **Annexure-II(B)#.**

(*) The letter from CA in place of Statutory Auditor is acceptable where audited accounts are not mandatory as per law at the time of preparation of financial statement for a particular financial year. Also, CA shall not be an employee/ Director and not having any interest in the bidder's company/Firm.

(#) Bidders (Other than companies such as Partnership/ Proprietorship firms) are required to submit the details from their Statutory Auditor/ Chartered accountant as per Table A of Annexure-II(A) or Annexure-II(B) (as applicable)

The above financial details, as per Annexure-II (A/B) to IFB, shall be submitted without any reservation/ qualification remarks.

Notes:

i. Bidder shall be required to submit the audited Annual Reports/Financial Statements of the Company as per the provision of bidding document, issued till the final bid due date.

Bidder to note that any shortfall information/documents on the Audited Annual Reports/Financial Statements of the Company, issued on or before the final bid due date may be sought through CQs but bidder shall not be allowed to submit the audited financial statements of the company issued after the final Bid Due date and time. Accordingly, Financial Statements of the company audited & issued Post Final bid due date and time shall not be considered for evaluation.

ii. In case of Foreign Bidders, if the Annual Turnover is in currency other than USD, the same shall be converted into equivalent USD considering the conversion factor indicated in Bidder's Audited Financial Report. In case the same is not indicated, the conversion rate of USD as on last date of Bidder's financial year shall be considered based on SBI Bill Selling rate.

In case, the SBI Bill Selling rate is not available as on the date of conversion as specified above for respective cases, the exchange rate for conversion of currency shall be taken from the internet, such as:

https://www.xe.com/currencyconverter
https://economictimes.indiatimes.com/markets/forex/currency-converter
https://www.oanda.com/currency/converter

iii. In case the last financial year's closing date was within 9 months prior to final bid due date and Complete Audited Financial Statement of last financial year are not available, bidder has the option to submit the financial details of the three previous financial years immediately prior to the last financial year. Otherwise, it is compulsory to submit the financial details of the immediate preceding three financial years.

For example, in case, final bid due date is up to 31st December and financial details of immediate preceding financial year (year ending 31st March of the same year) are not available,

the financial details of the three previous years immediately prior to the last financial year may be submitted.

iv. **Submission of Consolidated Audited Financial Statement:**

- **Bidder is a Parent/Holding Company:** Where only consolidated Audited Financial Statements are prepared and audited, which includes the financial details of their wholly owned subsidiaries etc., consolidated audited financial statement shall be considered for establishing the financial criteria subject to Statutory Auditor/ CEO/ CFO/ Company Secretary or any member of the Board of Directors of the bidder, certifying that standalone Financial Statements of bidder (without the financial data of subsidiaries, etc.) is not separately prepared and audited.
- **Bidder is a Subsidiary Company:** In case a Bidder is a Subsidiary Company and separate Financial Statements of the Bidder is not prepared & audited, but only a consolidated audited Financial Statements of their Parent Company/Holding Company are available, consolidated audited Financial Statement shall be considered for establishing the financial criteria subject to Statutory Auditor/ CEO/ CFO/ Company Secretary or any member of the Board of Directors of the Parent/Holding company (whose Audited Financial Statements are submitted for qualification) certifying in their letterhead that Financial Statements of Bidder are not separately prepared and audited.

v. Statutory Auditor / practicing Chartered Accountant (as applicable), shall mandatorily mention Unique Document Identification Number (UDIN) on all certificates /reports issued / attested by them, from 01-Jul-2019, as stipulated by ICAI at its 379th Council Meeting held on 17th-18th December, 2018.

This requirement of including UDIN shall not be applicable for certificate / reports issued / attested by a chartered accountant practising in foreign country.

3.4 AUTHENTICATION OF DOCUMENTS SUBMITTED IN SUPPORT OF BIDDER QUALIFICATION CRITERIA (BQC):

Submission of genuine and authentic documents is the prime responsibility of the bidder. Bidders should ensure submission of complete information/documentation in the first instance itself. Qualification may be completed based on the details so furnished without seeking any subsequent additional information and EIL/PLL reserves the right to reject the bid without making any reference to the bidder.

Accordingly, in order to lend credibility and instill confidence in the procurement process, the mechanism for certification regarding authenticity of BQC documents has been prescribed as under:

3.4.1 For authentication of document submitted in support of Financial Bid Qualification Criteria (BQC):

Indian Bidder:

i) Bidder shall submit “Details of financial capability of bidder” as per Annexure-II(A) or Annexure-II(B) duly signed and stamped by Statutory Auditor or Chartered Accountant (as the case may be).

ii) Further copy of audited annual financial statements submitted in bid shall be duly certified/attested by notary public with legible stamp.

Foreign Bidder:

i) Bidder shall submit “Details of financial capability of bidder” as per Annexure-II A or Annexure-II B duly signed and stamped by Statutory Auditor or Chartered Accountant (as the case may be).

ii) Further, copy of audited annual financial statements submitted in bid shall be certified true copies, duly signed, dated and stamped by an official, authorized for this purpose in Indian Embassy/High Commission in bidder’s country. However, member countries of Hague Convention 1961, supporting document pertaining to financial BEC apostille affixed by Competent Authorities designated by the government of bidder’s country shall also be acceptable.

In case the foreign bidder is unable to submit duly audited financial statements due to their internal/local regulation, a certificate issued by CEO’s/ CFO’s (of the parent company for itself of

for its subsidiary in case bidder is a subsidiary) certifying all the required information along with a declaration that the bidding company is not in a position to submit its financial statement as per the local/ internal regulation (clearly specifying the applicable regulation) with an endorsement by Chartered Accountant/ Statutory Auditor/ Certified Public Accountant (not being an employee or a Director or not having any interest in the bidder(s) company/ firm) shall be submitted.

Wherever Chartered Accountant/ Statutory Auditor/ Certified Public Accountant (not being an employee or a Director or not having any interest in the bidder(s) company/ firm) is not in a position to endorse such CEO's/ CFO's certificate due to local regulations, CEO's/ CFO's certificate without endorsement may be accepted provided a reference of the local regulation restricting this endorsement is given in the CEO's/CFO's certificate.

3.4.2 For authentication of document submitted in support of Technical Bid Qualification Criteria (BQC):

All documents in support of Technical Criteria of Bid Evaluation Criteria (BEC) furnished by the bidders shall be verified and certified by any one of the following independent third party inspection agency:

i. Société Générale de Surveillance (SGS)
ii. Gulf Lloyds Industrial Services (India) Pvt. Ltd. (GLIS)
iii. International Certification Services (ICS)
iv. Bureau Veritas (Ind.) Pvt. Ltd (BVIS)
v. TUV SUD (TUV)
vi. Det Norske Veritas (DNV)
vii. Certification Engineers International Ltd. (CEIL)
viii. Lloyds Register Industrial Services (LRIS)

However, any work/purchase/service order executed for PLL/EIL/ any other client where EIL is consultant, by the bidder shall not require any certification from external parties (i.e. Chartered engineer, notary, or any third-party agency).

3.4.3 All charges of the Third party for verification and certification shall be borne by the Bidder.

3.4.4 Since the bids are being obtained through e-tendering, bidders shall be required to upload the digitally signed authenticated copies of documents for meeting BQC on the e-tendering portal only. Bidder shall not be required to submit the original authenticated documents in physical form to EIL/PLL.

3.4.5 Regarding the authenticity/ correctness of any document, EIL/PLL reserves the right to get the document(s) cross verified from the document issuing authority or any relevant source.

3.5 GENERAL:

3.5.1 **Failure to meet the above Qualifying Criteria at Clauses 3.1 (Technical BQC) and 3.2 (Financial Criteria) above will render the bid to be summarily rejected.**

3.5.2 Bidder shall furnish documentary evidence i.e. copies of work orders/ relevant pages of Contract/SOR/invoice/final Bill, completion certificate, from the Owner/ Consultant of work executed, Audited Annual Financial Statements containing audited balance sheets and profit & loss accounts statement, details of financial status as per annexed formats etc. in the first instance itself, in support of their fulfilling the qualification criteria. **EIL/PLL reserves the right to complete the evaluation based on the details furnished without seeking any additional information.**

3.5.3 For cases involving Bidder Qualification Criteria, only such past experience(s) shall be considered for qualification, details of which are provided in the Bid by the Bidder and/or out of the list of Similar Work experiences specified in the Bid (with or without submitting relevant qualification documents), and subsequently no additional past experience (PTR) which is not referred at all in the Bid in specific location, shall be permitted to be submitted by the Bidder and the Bid shall be evaluated in the following manner:

a) In case, a Bidder does not meet the BQC based on experience documents (copy of work order, completion certificate, performance certificate etc. as more specifically mentioned in the BQC) submitted by the Bidder in support of meeting the BQC, Bids shall be rejected in case of

"No Deviation Bid" without issuing TQs/CQs. However, in case CQs/ TQs are issued, Bidders can be allowed to submit additional documents for any of the work out of the past experience(s) (PTR) list already submitted along with the Bid, to support their meeting the BQC.

b) No additional past experience(s) (PTR) (not specified in the list already provided by the Bidder in their Bid) shall be considered from the Bidders, since this would amount to substantive change in the Bid.

3.5.4 Except as stated in Clause 3.5.3 above, EIL/Owner reserves the right to evaluate the Bids using in-house information of PLL/EIL. Further, if the Bidder cites any reference of a job executed for PLL/some other Client through EIL and the Bidder is not able to furnish documentary evidence, PLL/EIL may consider the internal records of PLL or EIL.

3.5.5 Any additional documents, if deemed necessary to establish the qualifying requirements may be submitted by the Bidder.

3.5.6 EIL/PLL reserves the right to complete the evaluation based on the details furnished (without seeking any additional information) and / or in-house data, survey or otherwise.

4 **DELIVERY PERIOD:**

Indian Bidders:

Within 10 Months on FOT Site basis from the date of LOA (Letter of Acceptance) / PO (Purchase order), whichever is earlier. **The date of receipt of material at site shall be considered as date of delivery.**

Delivery schedule shall be reckoned from an "Effective Date" which shall be notified later, after issuance of Letter of Acceptance (LOA). The "Effective Date" shall not be later than six months from the date of placement of LOA.

Indigenous suppliers are required to dispatch the goods on prepaid door delivery basis through any registered Transporters on FOT Site basis.

Foreign Bidders:

Within 9 Months on FOB International Sea Port of Exit basis from the date of LOA (Letter of Acceptance) / PO (Purchase order), whichever is earlier. The date of clean bill of lading shall be considered as date of delivery.

Delivery schedule shall be reckoned from an "Effective Date" which shall be notified later, after issuance of Letter of Acceptance (LOA). The "Effective Date" shall not be later than six months from the date of placement of LOA.

Foreign suppliers are required to dispatch the goods on FOB/CFR Indian seaport of entry basis, wherein the ocean transportation from FOB Port of Exit to the designated Indian Port shall be arranged by the supplier.

In case foreign bidder is sourcing any component from India, such Indigenous sub-suppliers (of the foreign bidder) are required to dispatch the goods on prepaid door delivery basis through any registered Transporter on FOT Site basis.

5 **THE SALIENT FEATURES OF THE BIDDING/IFB DOCUMENT ARE AS FOLLOWS**:

5.1 Salient Features:

Sl. No.	SALIENT FEATURES		DETAILS		
a)	Earnest Money Deposit (EMD) / Bid Security	:	**MR Item Details**	**For Indian Bidder (in INR)**	**For Foreign Bidder (in USD)**

Sl. No.	SALIENT FEATURES		DETAILS		
	Refer Cl. No. 19 of Instructions to Bidders (ITB) for details.		MR Item No. 1	15,500.00	170.00
			MR Item No. 2	237,300.00	2,570.00
			MR Item No. 3	91,100.00	990.00
			MR Item No. 4	34,100.00	370.00
			MR Item No. 5	49,700.00	540.00
			MR Item No. 6	15,300.00	170.00
			MR Item No. 7	NIL	NIL
			MR Item No. 8	NIL	NIL
			MR Item No. 9	NIL	NIL
			MR Item No. 10	NIL	NIL
			MR Item No. 11	NIL	NIL
			MR Item No. 12	NIL	NIL
			MR Item No. 13	NIL	NIL
			MR Item No. 14	NIL	NIL
			MR Item No. 15	NIL	NIL
			MR Item No. 16	26,300.00	280.00
			MR Item No. 17	39,600.00	430.00
			MR Item No. 18	158,500.00	1,710.00
			MR Item No. 19	62,800.00	680.00
			MR Item No. 20	NIL	NIL
			MR Item No. 21	NIL	NIL
			MR Item No. 22	NIL	NIL

Sl. No.	SALIENT FEATURES		DETAILS		
			MR Item No. 23	15,000.00	160.00
			MR Item No. 24	33,000.00	360.00
			MR Item No. 25	22,300.00	240.00
			MR Item No. 26	NIL	NIL
			MR Item No. 27	NIL	NIL
			MR Item No. 28	205,500.00	2,220.00
			MR Item No. 29	NIL	NIL
			MR Item No. 30	531,400.00	5,750.00
			MR Item No. 31	42,700.00	460.00
			MR Item No. 32	59,500.00	640.00
			MR Item No. 33	22,600.00	240.00
			MR Item No. 34	1,009,300.00	10,920.00
			MR Item No. 35	811,100.00	8,780.00
			MR Item No. 36	1,001,700.00	10,840.00
			MR Item No. 37	2,580,300.00	27,920.00
			MR Item No. 38	295,100.00	3,190.00
			MR Item No. 39	1,275,500.00	13,800.00
			MR Item No. 40	3,564,200.00	38,570.00
			MR Item No. 41	43,400.00	470.00
			MR Item No. 42	114,100.00	1,230.00
			MR Item No. 43	44,300.00	480.00
			MR Item No. 44	76,500.00	830.00

Sl. No.	SALIENT FEATURES		DETAILS

MR Item No. 45	38,200.00	410.00
MR Item No. 46	348,000.00	3,770.00
MR Item No. 47	69,600.00	750.00
MR Item No. 48	NIL	NIL
MR Item No. 49	44,800.00	480.00
MR Item No. 50	18,600.00	200.00
MR Item No. 51	32,600.00	350.00
MR Item No. 52	NIL	NIL
MR Item No. 53	80,600.00	870.00
MR Item No. 54	933,900.00	10,100.00
MR Item No. 55	724,700.00	7,840.00
MR Item No. 56	241,700.00	2,610.00
MR Item No. 57	901,700.00	9,760.00

Notes:

i) In addition to submission of EMD through BG and DD, Bidder may submit EMD through PLL EMD Module shall be as per below:
https://petronetlng.in/emd/tender?number=JP/B862-000-WB-MR-3138/540

ii) In case of foreign bidder, EMD shall be accepted only in form of Bank Guarantee.

iii) MSE bidders (Micro and Small Enterprise) are exempted from submission of EMD subject to submission of valid Udyam Registration Certificate with the e bid.

iv) Medium enterprises are not exempted from submission of EMD, irrespective of their change in status from Micro/ Small to medium in last three years.

v) If bidder is quoting for multiple groups, then value of EMD shall be on cumulative/aggregate basis.

vi) Bidder may submit Insurance surety bond in lieu of EMD. Insurance Company issuing

Sl. No.	SALIENT FEATURES		DETAILS
			Bond shall have credit rating from Crisil/ICRA (AA), this condition of rating shall not be applicable for public sector Insurance Companies.
b)	Bidding/IFB Document and subsequent Addenda / Corrigenda (if any) available on Web-site for viewing and downloading	:	From 18.03.2026 to 29.04.2026
c)	Last date of receipt for pre-bid queries	:	Up to 02.04.2026**; 18:55 HRS** (Bidder shall submit their queries strictly within the cut-off date/time as specified above on e-tender portal only after which EIL/PLL reserve the right not to entertain such queries) Editable copies of Pre-bid queries shall be forwarded to: Mr. Munish Takhi, Manager (SCM-C&P) / Mr. Ranjit Vunna, AGM (SCM-C&P) / Mr. Jaydip Purkayastha, GM (SCM-C&P) (Contact Details are mentioned at Sl. No. “m” below)
d)	Pre-bid meeting	:	At 1400 **Hrs (IST) on 01**.04.2026 on MS Teams platform as per web-link below (*) **Join:** https://teams.microsoft.com/meet/44815007023632?p=Z90KFBSJlkBAdBBUyT Meeting ID: 448 150 070 236 32 Passcode: ws9gv3FK
e)	Last date and time of submission of e-Bids	:	Up to **12:00 Hrs. (IST)** on 29.04.2026 Bidder to refer e-tendering portal in case of any extension of bid due date.
f)	Opening of Techno-commercial (Unpriced) e-Bids	:	1400 Hrs. (IST) on 30.04.2026
g)	Tender Fee	:	NOT APPLICABLE
h)	Opening of Priced Bids	:	The date & time to be intimated later to the technically & commercially qualified bidders.
i)	Non-Disclosure Agreement		NOT APPLICABLE
j)	Integrity Pact	:	Integrity Pact submission is Applicable for this enquiry. Non submission of the same shall render the offer liable for rejection. **Independent External Monitors (IEM) details are as follows:** **Shri Sanjeev Mitla**

Sl. No.	SALIENT FEATURES		DETAILS
			Email: sanjeev.mitla@sharmagoel.in
k)	Reverse Auction	:	Not Applicable
l)	Bid Validity	:	Bid shall remain valid for a period of FOUR **MONTHS** from final/extended due date of submission of Bid.
m)	Contact Person for any query/ clarification	:	Mr. Munish Takhi, Manager (SCM-C&P), E-mail ID: munish.takhi@eil.co.in Tel no.: +91-124-289-1346 Mr. Ranjit Vunna, AGM (SCM-C&P), E-mail ID: ranjit.vunna@eil.co.in Tel no.: +91-124-289-1308 Mr. Jaydip Purkayastha, GM (SCM-C&P) E-mail ID:jaydip@eil.co.in Tel. No.: +91-124-289-1287

5.2 If the date indicated at Sl. No. 5.1 (f) above happens to be a declared/closed holiday in EIL-Gurugram, the next working day shall be considered.

5.3 All revisions, amendments, time extensions, clarifications, etc. to the IFB/Bidding Document shall be uploaded in the NIC-CPP Portal (https://eprocure.gov.in/eprocure/app) only and shall not be published in Newspapers. Bidders should regularly visit the above-mentioned website(s) to keep themselves updated and submit their Bids based on latest information/instructions hosted in website(s).

5.4 Bidder shall submit their requests for extension of Bid due date (if unavoidable). EIL/PLL may at its sole discretion extend Bid due date on such written requests if the time schedule permits.

6 EARNEST MONEY DEPOSIT (EMD) / BID SECURITY:

6.1 Bids must be accompanied with Earnest Money Deposit / Bid Security in favour of "Petronet LNG Limited" payable at "New Delhi". Bids not accompanied with requisite Earnest Money deposit /Bid Security (or valid Udyam Registration Certificate, wherever applicable) shall be considered as non-responsive and such Bids shall be summarily rejected. EMD/Bid Security shall be in the form of crossed demand draft OR non-revocable Bank Guarantee on non-judicial stamp paper of value not less than INR 100/- from Bank as indicated under Clause 19 of Instruction to Bidders (ITB) and shall be valid for 1 (One) Month beyond the original bid validity (in the prescribed proforma enclosed with bidding document) or through Net banking as indicated under Clause 19 of Instruction to Bidders (ITB). In case of extension in original bid validity, the EMD/Bid Security validity shall be extended accordingly.

6.2 Exemption from submission of Earnest Money Deposit shall be as indicated below:

a) In case of Micro and Small Enterprise, only Udyam Registration certificate shall be considered for availing the benefit of EMD exemption. Irrespective of the product category, exemption from payment of EMD shall be given to all eligible MSEs (Micro & Small Enterprises), except for Traders and in Works contracts.

b) If the MSE bidder does not provide Udyam Registration Certificate along with the e-bid to substantiate their MSE status, such offer of such MSE bidder shall be rejected provided such bidder has not submitted EMD.

In case an MSE bidder has submitted Udyam Registration No. but scanned document is not uploaded along with Bid on e-tendering portal, the same can be accepted provided a valid MSE Certification is available on Government Udyam Registration portal.

c) The Udyam Registration Certificate shall be verified from GoI Udyam registration portal (Present web address is https://udyamregistration.gov.in/Udyam_Verify.aspx). The status of MSE Bidder as on date of Unpriced Bid Opening shall be considered for EMD exemption benefit.

6.3 Scanned copy of EMD (or exemption certificate, wherever applicable) shall be uploaded at the designated place in the above-mentioned NIC-CPP/e-tendering Portal. Swift message/Cheque/Cash shall not be acceptable. In case, bidder fails to upload scanned copy of EMD (or exemption certificate, wherever applicable) at the designated place on NIC-CPP/e-tendering Portal by the bid due date & time, such bid shall not be considered for evaluation.

6.4 Original EMD/ Bid Security, in addition to uploading with the bid on the NIC-CPP/e-tendering Portal, shall also be submitted within 7 (seven) calendar days (*) (1200 Hrs IST) from the final due date/time of submission of bid. In case the EMD/Bid Security in original physical form does not reach EIL-Gurugram office within the above cut-off date and time, their bid shall be rejected and not considered for further evaluation, notwithstanding the fact that a copy of EMD/Bid Security was earlier uploaded by the bidder on the NIC-CPP/e-tendering Portal.

(*) If the cut-off date for submission of original Bid Security specified above happens to be a declared/closed holiday in EIL-Gurugram, the next working day (date and time) shall be considered.

Place for Submission of Original EMD/Bid Security:

DAK RECEIPT SECTION,
ENGINEERS INDIA LIMITED
R&D COMPLEX, SECTOR-16 (On N.H.-8)
TOWER-2 (GROUND FLOOR),
GURGAON-122 001, HARYANA (INDIA)
ATTN: Mr. Jaydip Purkayastha, GM (SCM)
Phone no. +91-124- 289 1346 / 1308/ 1287
E-mail ID: munish.takhi@eil.co.in/ ranjit.vunna@eil.co.in / jaydip@eil.co.in

6.5 Apart from hard copy submission of BGs, bank guarantee issued towards EMD, it shall be ensured that same is also routed through SFMS platform (Structured Financial Messaging System)/ SWIFT message (from foreign banks) for Bank Guarantee issuance and Verification. The information/message (as per SFMS platform) shall be sent by BG issuing bank branch to PLL's Banker. Failure to adhere to this requirement may render the bid liable for rejection. Details of PLL's Banker is available under Cl. No. 19 of Instruction to Bidders (ITB).

6.6 In case of Foreign Bidder, Bid Security shall be acceptable from Bidder's subsidiary or associate Company or authorized Indian counterpart on behalf of foreign bidder in USD/INR. In such a case, following conditions must be complied:

i. Bid Security, if issued in the form of a bank guarantee shall clearly state that it is issued by the Indian Counter Part for & on behalf of the Foreign Bidder.

ii. The bank guarantee shall contain specific declaration from the Indian Counter Part that the Bank Guarantee shall be liable for invocation in case of any default by the foreign bidder in terms of the bidding document.

iii. The Indian Counter Part shall be duly authorized by the foreign bidder to issue the bank guarantee on their behalf, on the foreign bidder's letter head. This authorization shall be appended with the bid security.

7 SUBMISSION OF BIDS:

7.1 Bidders are required to register themselves at http://eprocure.gov.in/app.No registration fee would be charged from the bidders. The vendor registration on NIC Portal is a very user-friendly process. However, in case of any doubt, the vendor may contact the tender inviting authority.

All those bidders who have not complied with the above registration requirements will not be eligible to bid. Request for extension in due date of submission of bids due to non-registration or delayed registration in NIC portal shall not be entertained

7.2 Bidder can download the Bidding Documents from e-tendering website of CPP portal (http://eprocure.gov.in/eprocure/app). All amendments, time extension, clarifications etc. will be uploaded in CPP Portal only. Bidders should regularly visit the above website to keep themselves updated. No extension in the bid due date / time shall be considered on account of delay in receipt of any document by mail.

Provisions mentioned in Instruction to Bidders with regard to uploading of bidding document, replies/clarifications to bidder queries, techno-commercially amendments etc., on EIL website shall stands modified to the extent that these shall be uploaded on CPP portal only.

7.3 Bidders to refer E-Tendering methodology enclosed with this IFB. Various links such as "Help for Contractor", "Information about DSC", "FAQ", "Resources Required", "Bidders Manual Kit" etc. are available on home page of http://eprocure.gov.in/eprocure/appfacilitating vendors to participate in the bidding process. Bidder are advised to download & utilize the available information/documents under these links for activities like Registration in CPPP, obtaining User ID & Password, uploading & submission of e-bids etc. Bidders are advised in their own interest to carefully go through Instructions for E-tendering and other related document available against various help links so as to ensure that bids are uploaded in E-tendering website well before the closing date and time of bid submission.

7.4 All amendments, time extension, clarifications etc. will be uploaded in CPP portal (http://eprocure.gov.in/eprocure/app) only. Bidders should regularly visit the e-tendering website to keep themselves updated. No extension in the bid due date / time shall be considered on account of delay in receipt of any document by Mail/Post.

7.5 Bidders are required to submit their bids complete in all respects in accordance with Instructions to Bidders (ITB) only through e-tendering website of CPP portal (http://eprocure.gov.in/eprocure/app) **on or before the bid-submission due date & time** as specified above. Bidder to carefully read and understand the instructions for e-tendering as indicated in ITB to upload their bid on e-tendering website.

7.6 ***Bidder(s) are advised to upload their bid as soon as they are permitted to upload the bid.*** In the event of failure in bidder's connectivity with e-tendering Portal during the last few hours on account of any problem and they are likely to miss the deadline for bid submission in such a case request for extension in bid due date will not be entertained.

7.7 Bidders in their own interest are requested to upload/submit their bid well in time. In the event of failure in bidder's connectivity with the above-mentioned-tendering Portal during the last few hours, bidder is likely to miss the deadline for bid submission. Due date extension request due to above reason may not be entertained.

7.8 Please submit your Acknowledgement against the IFB on EIL's website http://tenders.eil.co.in within the due date & time, with reason(s) of not participating in the bidding process in case of regret/negative acknowledgment. In case there is no response, the bidder shall be liable for suitable action including review of their enlistment with EIL for the subject item.

7.9 **Physical Bids sent through Fax/E-mail/Courier/Post will not be accepted. However,** any specific document required to be submitted in physical form as per IFB shall also be submitted in physical form.

8 PRE-BID MEETING AND IMPORTANCE OF ATTENDING PRE-BID MEETING:

8.1 Pre-bid Meeting shall be held on the scheduled date and time as stated in Sl. No. 5.1 d) above.

8.2 Bidders or their competent authorized representatives are requested to attend the Pre-Bid Meeting so that their queries, if any, related to the Bidding document and Scope of Work etc. can be addressed during the pre-bid meeting to enable the bidder to submit Zero Deviation Bid.

8.3 Bidders shall treat the pre-bid meeting as of utmost importance in their own interest and depute competent persons to understand the requirement and capable of taking spot decision to sort out all the technical, commercial and legal issues. Bidders are also advised to attend the pre-bid meeting along with their technical, commercial and legal representative, if so desired, to get all issues clarified for submission of "**Zero- Deviation bid**" to meet the project time schedule.

8.4 Bidder may note that Bid shall be submitted on the basis of "**ZERO DEVIATION**" and shall be in full compliance to the requirements of Bidding Document, failing which bid shall be considered as non-responsive and may be liable for rejection.

8.5 Bidders who are not attending the pre-bid meeting, it shall be considered that the bidder has a clear understanding of the scope, specifications, terms & conditions etc. of the bidding document and does not have any comments/ deviations to the requirements of the bidding document and their offer shall be strictly as per provisions of the bidding document without any deviation/clarification etc.

8.6 Bidders to note that EIL reserves the right not to give any opportunity to the bidder after the final bid submission date and time for seeking any clarification or submission of balance documents not submitted earlier. Their bid shall be evaluated as per the documents submitted along with their bids.

8.7 In order to ensure fruitful discussions during pre-bid meeting, the bidder is requested to submit any queries/clarification/information pertaining to Bidding document in writing in the format provided in Bidding Forms.

Bidder shall submit their queries only through NIC CPP e-tendering portal strictly before cut-off date mentioned in IFB after which, EIL shall reserve the right not to entertain any queries. Queries sent through e-mails or any other mode by any bidder may not be given any cognizance.

8.8 Replies to the pre-bid queries will be uploaded on e-procurement CPP portal expeditiously as possible. After the cut- off date for submission of pre-bid queries in CPP portal, no further queries will be entertained from the bidders. The response of EIL shall not form part of the Bidding Document unless issued as an Addendum/ Amendment. Bidders shall submit their bid taking into cognizance of such published clarifications/response.

8.9 Any modification to the bidding document, which may become necessary as a result of the pre-bid queries/ pre bid discussion, shall be intimated to all bidders through the issue of an Addendum/Amendment. Record notes of pre-bid meeting shall not be considered as part of IFB.

9 REVERSE AUCTION: NOT APPLICABLE

10 AWARD METHODOLOGY

10.1 The bidders can quote for any one or multiple items. Bidder can be awarded single or multiple items, subject to their meeting the qualification criteria and EMD requirement on item wise or cumulatively (as indicated elsewhere) and ordering shall be on least cost combination basis.

10.2 No Purchase Preference to MSE bidders shall be applicable.

10.3 **EIL/Owner's decision in this regard shall be final and binding on the bidder.**

11 GENERAL

11.1 The Bidders who are on Holiday/Negative/Suspension/Banning list and/or any other similar list of EIL/PLL on the due date of submission of Bid / during the process of evaluation of the Bids, the offers of such Bidders shall not be considered for Bid opening/Evaluation/Award.

Any Bidder who has been rated Poor against previous supply references and notice/warning to this effect has been issued by PLL during past 2 years as per relevant provisions of the respective contract/work order for initiation of Holiday Listing in PLL Vendor Database, shall not be considered. The period of 2 years shall be reckoned from original Bid Due Date.

11.2 Bidder should not be under liquidation, court receivership or similar proceedings.

11.3 **In case Bidder(s) affirms that present litigations/arbitrations have impact on their obligations to perform the Contract or doesn't provide the affirmations as above, their bids shall be rejected.**

11.4 Subsequent to the submission of bid, bidders are not allowed to change the price or substance of the bid i.e. scope of work, specifications, delivery schedule, completion period etc.

11.5 Consortium / Unincorporated Joint Venture Bids are **not acceptable.**

11.6 In case contract/ Purchase order awarded for a previously tendered work has to be terminated due to Contractor's default and a separate enquiry / tender has been refloated to get the remaining/ complete work executed, such defaulting Contractor will not be considered for the refloated enquiry.

11.7 In case any bidder is found to be involved in cartel formation, his bid will not be considered for evaluation/ placement of order. Such bidder will be debarred from bidding in future.

11.8 Canvassing in any form by the Bidder or by any other Bidder on their behalf may lead to disqualification of their Bid.

11.9 EIL/Owner shall not be responsible for any expenses incurred by bidders in connection with the preparation & delivery of their bids, site visit and other expenses incurred during bidding process.

11.10 EIL/PLL reserves the right to reject any or all Bids or annul the tender without assigning any reason, whatsoever.

11.11 Wherever the term – "Black-listing / Holiday Listing" is appearing anywhere in the IFB/Bidding Document including formats, declaration etc, the same stands replaced by – "Black-listing/ Holiday Listing/Suspension / Banning List".

11.12 Department of Expenditure (Govt. of India) vide OM no. 7/10/2021-PPD (1) DATED 23.02.2023 has issued the revised Guidelines for Restriction on Procurement from Bidders from Countries sharing Border with India.

Bidder is advised to refer to the guidelines (annexed with Instruction to Bidders (ITB) of this bidding document) and submit the undertaking (Form-IA/IB/II) to confirm their compliance to the above said policy.

***Please specify NIC-CPP Tender ID &Bidding Document No. in all correspondence**

THIS IS NOT AN ORDER

Very truly yours,
(Jaydip Purkayastha)
GM (SCM-C&P)
Engineers India Limited

EXPERIENCE RECORD PRO-FORMA (ERP) FOR VALVES

MR Item S. No.		Bidder's PTR								
	Design Type (Note-6)	Body Metallurgy (CS/LTCS/Stainless Steel)	Max. Size & Rating	Service	PO/ Work Order Details (Note – 4)	Inspection Release Note from TPIA or Completion Certificate from Owner (Note – 4)	Fire safe certificate number & qualifying range (Note – 4)	Cryogenic test certificate number & qualifying range as per BQC clause. (Note – 4)	Whether Bidder is quoting based on the jobs executed for Subsidiary/ Fellow subsidiary/ Holding company as mentioned in IFB- **Yes/ No**	Remarks

PTR: Proven Track Record TPIA: Third Party Inspection Agency PO: Purchase Order PR: Purchase Requisition

Notes:

1. This pro-forma shall be duly filled-in, stamped and signed by bidder and shall be submitted along with Bid.
2. Since the information requested in this pro-forma shall be utilized to assess the Bidder's capability to execute subject order, it would be in the interest of the Bidder to include only those references which are relevant to items being quoted (MR Item S. No.) for meeting BQC.
3. The Bidder shall also ensure that all information asked for is furnished and the same is correct and complete in all respects. **Incorrect information furnished in this pro-forma shall render the bid/ order liable for rejection at any stage of evaluation/ work execution, at the risk and cost of the Bidder.**
4. Copy of listed documents shall be submitted along with the Bid as a documentary proof. Inspection Release Note from TPIA or Completion Certificate from Owner shall be furnished for the same PO/PR/Work Order, which has been furnished by the bidder as PTR document.
5. Bidders are required to submit all such past experience(s) (PTR) meeting the BQC along with relevant supporting documents in the first instance itself, along with the bid. Accordingly, only such past experience(s) shall be considered for qualification, details of which are provided in the bid by the bidder and subsequently no additional past experience (PTR) shall be sought from the bidder.
6. Drawings shall be submitted to establish the type of design like floating, trunnion mounted, top entry, cavity relief feature, full port and soft seated, triple offset, cryogenic etc.

Copyright EIL – All rights reserved

Annexure-I to IFB

(To be declared by the Bank on their Letter Head)

DECLARATION FOR AVAILABILITY OF UNUTILIZED LINE OF CREDIT

Ref:_____ Date: _____

We _____<Insert Name of Bank>, a Bank, having its registered office at _____<Insert full address of the Bank with Country Name> and Branch at _____ <Insert full of Branch address with Country Name, in case different from registered office >, hereby confirm that the Company M/s _____<Insert Company Name in favour of whom Declaration being issued>, having its registered office at _____<Insert full address of Company with Country Name> and their working Office address at _____ <Insert full working office address with Country Name, in case different from registered office >, is having Bank account with our Bank.

The credit limits of the Company as on _____ **<Insert any Date between the date of Enquiry and Bid Due Date>**are as follows:

Fund Based Line of Credit (towards Working Capital like CC Limit)	**Amount in (Currency_____)**
Sanctioned Line of Credit	
Utilized Line of Credit	
Balance Line of Credit	

The Bank further hereby declare [Bank to specify as applicable]:

(a) that we are a Scheduled Bank in India; OR

(b) that we are a Commercial Bank having Net Worth more than **INR 1000 Million** (or equivalent USD) as per our latest audited financial statements.

Yours Faithfully,

Signature
Name:
Designation:
E-mail ID:
Mobile number:
Tel (with STD Code):
Seal:

Annexure – II (A) to IFB

(Letter from Statutory Auditor/Chartered Accountant)

(To be printed on Letter Head of Statutory Auditor/Chartered Accountant)

FINANCIAL DETAILS

We, _____, a CA firm having our registered office address _____ and certificate number _____ certify that we are statutory auditor of the Company M/s _____, having its registered office at _____.

OR

We, _____, a CA firm having our registered office address _____ and certificate number _____ certify that statutory audit is not mandatory for the M/s _____, having its registered office at _____ as per prevailing law and we are practicing Chartered Accountant, not being an employee / Director and not having any interest in the company.

Financial details of the above-mentioned Company, as per latest available audited balance sheet are as follows: Statutory Auditor/Chartered Accountant to select either of the following options and strike off the other.

a. In case bidder is a parent company, i.e., having its subsidiaries: Auditor to select either of the following options and strike off the other.
   i. Financial details are of parent company without the financial data of subsidiaries
   ii. Financial details are of parent company including the financial data of subsidiaries. It is certified that separate annual report of bidder, without the financial data of subsidiaries, is not prepared and audited.

   OR

b. In case bidder is a subsidiary company: Auditor to select either of the following options and strike off the other.
   i. Financial details are of subsidiary company
   ii. Financial details are of parent company including the financial data of subsidiaries. It is certified that separate annual report of bidder, i.e., subsidiary, is not prepared and audited.

   OR

c. In case bidder does not have any subsidiary or parent company, financial details are of the company itself.

S.No.	Description	Year	Value Currency (_____)
1.	Turnover	Latest financial year (_____)	
		Preceding 1st year (_____)	
		Preceding 2nd year (_____)	
2.	Net Worth	Latest financial year (_____)	(*)
3.	Working Capital	Latest financial year (_____)	

(*) – Indicate Positive or Negative (Value is not Mandatory)

Note:

1. In case the financial year closing date is within 9 months of bid due date and audited annual report of immediately preceding financial year is not available, bidder has the option to submit the financial details of the three previous years immediately prior to the last financial year. Otherwise, it is compulsory to submit the financial details of the immediate three preceding financial years.

   Example, In case, audited annual report of immediate preceding financial year (year ending 31st March) is not available and where bid closing date is up to 31ST December, the financial details of the three previous years immediately prior to the last financial year may be submitted. However, in case the bid closing date is after 31st December, it is compulsory to submit the financial details of the immediate three preceding financial years only.
2. In case of a bidder (a Parent Company) only consolidated Audited Financial Statements are prepared and audited which includes the financial details of their wholly owned subsidiaries, etc., consolidated audited Balance Sheet and Profit & Loss Account shall be considered for establishing the financial criteria subject to statutory auditor/ CEO/ CFO of the bidder certifying that separate Financial Statements of bidder (without the financial data of subsidiaries, etc.) is not prepared and audited.
3. Further, in case a bidder is a subsidiary company and separate Financial Statements of the bidder is not prepared & audited, but only a consolidated audited Financial Statements of the Parent Company is available, consolidated audited Balance Sheet and Profit & Loss Account shall be considered for establishing the financial criteria subject to statutory auditor/ CEO/ CFO of the parent company certifying that separate Financial Statements of bidder are not prepared and audited.
4. **Net Worth calculation:** Net Worth means paid up share capital, Share Application Money pending allotment* and reserves# less accumulated losses and deferred expenditure to the extent not written off. Net Worth has been calculated using the following formula, as per provisions of the enquiry document:

Reserves to be considered for the purpose of Net Worth shall be all reserves created out of the profits and securities premium account but shall not include reserves created out of revaluation of assets, write back of depreciation and amalgamation.

*Share Application Money pending allotment will be considered only in respect of share to be allotted.

Paid up share capital	XXXXX
Add: Share Application Money pending allotment	XXXXX
Add: Reserves (As defined Above)	XXXXX
Less: Accumulated Losses	XXXXX
Less: Deferred Revenue Expenditure to the extent not written off	XXXXX
Net Worth	**XXXXX**

5. **Working Capital calculation:**

Working Capital shall be Current Assets minus Current Liabilities.

Where Current assets means asset when it satisfies any of the following criteria: -

(a) it is expected to be realized in, or is intended for sale or consumption in, the company's normal operating cycle*;
(b) it is held primarily for the purpose of being traded;
(c) it is expected to be realized within twelve months after the reporting date; or
(d) it is cash or cash equivalent unless it is restricted from being exchanged or used to settle a liability for at least twelve months after the reporting date.

Where Current Liabilities means liabilities when it satisfies any of the following criteria: -

(a) it is expected to be settled in the company's normal operating cycle*;
(b) it is held primarily for the purpose of being traded;
(c) it is due to be settled within twelve months after the reporting date; or
(d) the company does not have an unconditional right to defer settlement of the liability for at least twelve months after the reporting date. Terms of a liability that could, at the option of the counterparty, result in its settlement by the issue of equity instruments do not affect its classification.

* An operating cycle is the time between the acquisition of assets for processing and their realization in cash or cash equivalents. Where the normal operating cycle cannot be identified, it is assumed to have a duration of twelve months.

Bidders (Other than companies such as Partnership/Proprietorship firms) are required to submit the following details duly certified from their Auditor/Chartered accountant. (Table-A)

S.no. **(1)**	Particulars **(2)**	Total Value as per Balance Sheet (INR) **(3)**	Amount **(out of column no. 3) Receivable/ Due within 12 months from balance sheet date** or as per above definition of current assets and current liabilities **(4)**
A	Current Assets as per Balance sheet		……
B	Assets (**Excluding Fixed Assets**) **which are not specifically disclosed as current assets** in the Balance sheet.		
	a. Loans and Advances	……	……
	b. Investments (Including Fixed Deposits)	……	……
	c. Other asset **(Excluding Fixed Assets)** which are not classified as current assets	……	……
		Total Current Assets	**…… (X)**
C	Current Liabilities as per Balance sheet		……
D	Liabilities **which are not specifically disclosed as current liabilities** in the Balance sheet.		
	a. Bank Overdraft / Bank CC limit etc.*		……
	b. Secured Loans	……	……
	c. Unsecured Loans	……	……
	d. Provisions	……	……
	e. Other Liabilities which are not classified as current Liabilities.	……	……
		Total Current Liabilities	**…… (Y)**
	Working Capital **(X-Y)**		……

*Bank Overdraft/ Bank CC limit shall be treated as current liabilities only and accordingly same shall be filled in column 4 only.

6. **Turnover:** Turnover shall be calculated excluding GST & other Incomes.

7. In view of above definition of Net Worth i.e. exclusion of certain reserves which shall not form part of Net Worth, EIL reserve the right to seek the clarifications from bidder duly signed by their statutory auditor regarding the origin/creation of various reserves shown in the Balance Sheet

8. Net Worth, Working Capital and Turnover has been calculated using the abovementioned formulae and after giving effect to the Impact of quantified qualified / adverse / disclaimer Auditor's opinion (if any) given in the Statutory Auditor's Report of the Bidder.

Signature with date
Name:
Designation:
UDIN [Applicable for CA in India]
Seal

Annexure-II(B) to IFB

(Certification by Statutory Auditor/Chartered Accountant)

(To be printed on Letter Head of Company)

FINANCIAL DETAILS

We, M/s _____, having our registered office at _____ certify that M/s _____ is a CA firm having their registered office address _____ having certificate number _____ are our statutory auditor.

OR

We, M/s _____, having our registered office at _____ certify that statutory audit is not mandatory for the company as per prevailing law and M/s _____ , a CA firm having their registered office address _____ having certificate number _____are practicing Chartered Accountant, not being an employee/Director and not having any interest in our company.

Financial details of our Company, as per latest available audited balance sheet are as follows: Company to select either of the following options and strike off the other.

a. In case bidder is a parent company, i.e., having its wholly owned subsidiaries: Company to select either of the following options and strike off the other:
   i. Financial details are of parent company without the financial data of subsidiaries
   ii. Financial details are of parent company including the financial data of subsidiaries. It is certified that separate annual report of bidder, without the financial data of subsidiaries, is not prepared and audited.

OR

b. In case bidder is a subsidiary company: Auditor to select either of the following options and strike off the other.
   i. Financial details are of subsidiary company
   ii. Financial details are of parent company including the financial data of subsidiaries. It is certified that separate annual report of bidder, i.e., subsidiary, is not prepared and audited.

OR

c. In case bidder does not have any subsidiary or parent company, Financial details are of the company itself.

S.No.	Description	Year	Value Currency (_____)
1.	Turnover	Latest financial year (_____)	
		Preceding 1st year (_____)	
		Preceding 2nd year (_____)	
2.	Net Worth	Latest financial year (_____)	(*)
3.	Working Capital	Latest financial year (_____)	

(*) – Indicate Positive or Negative (Value is not Mandatory)

Note:

1. In case the last financial year closing date is within 9 months of bid due date and audited annual report of immediate preceding financial year is not available, bidder has the option to submit the financial details of the three previous years immediately prior to the last financial year. Otherwise, it is compulsory to submit the financial details of the immediate three preceding financial years.

   Example, In case, audited annual report of immediate preceding financial year (year ending 31st March) is not available and where bid closing date is up to 31ST December, the financial details of the three previous years immediately prior to the last financial year may be submitted. However, in case the bid closing date is after 31st December, it is compulsory to submit the financial details of the immediate three preceding financial years only.
2. In case of a bidder (a Parent Company) only consolidated Audited Financial Statements are prepared and audited which includes the financial details of their wholly owned subsidiaries, etc., consolidated audited Balance Sheet and Profit & Loss Account shall be considered for establishing the financial criteria subject to statutory auditor/ CEO/ CFO of the bidder certifying that separate Financial Statements of bidder (without the financial data of subsidiaries, etc.) is not prepared and audited.
3. Further, in case a bidder is a subsidiary company and separate Financial Statements of the bidder is not prepared & audited, but only a consolidated audited Financial Statements of the Parent Company is available, consolidated audited Balance Sheet and Profit & Loss Account shall be considered for establishing the financial criteria subject to statutory auditor/ CEO/ CFO of the parent company certifying that separate Financial Statements of bidder are not prepared and audited.
4. **Net Worth calculation:** Net Worth means paid up share capital, Share Application Money pending allotment* and reserves# less accumulated losses and deferred expenditure to the extent not written off. Net Worth has been calculated using the following formula, as per provisions of the enquiry document:

Reserves to be considered for the purpose of Net Worth shall be all reserves created out of the profits and securities premium account but shall not include reserves created out of revaluation of assets, write back of depreciation and amalgamation.

*Share Application Money pending allotment will be considered only in respect of share to be allotted.

Paid up share capital	XXXXX
Add: Share Application Money pending allotment	XXXXX
Add: Reserves (As defined Above)	XXXXX
Less: Accumulated Losses	XXXXX
Less: Deferred Revenue Expenditure to the extent not written off	XXXXX
Net Worth	**XXXXX**

5. **Working Capital calculation:**

Working Capital shall be Current Assets minus Current Liabilities.

Where Current assets means asset when it satisfies any of the following criteria: -

(a) it is expected to be realized in, or is intended for sale or consumption in, the company's normal operating cycle*;

(b) it is held primarily for the purpose of being traded;

(c) it is expected to be realized within twelve months after the reporting date; or

(d) it is cash or cash equivalent unless it is restricted from being exchanged or used to settle a liability for at least twelve months after the reporting date.

Where Current Liabilities means liabilities when it satisfies any of the following criteria: -

(a) it is expected to be settled in the company's normal operating cycle*;

(b) it is held primarily for the purpose of being traded;

(c) it is due to be settled within twelve months after the reporting date; or

(d) the company does not have an unconditional right to defer settlement of the liability for at least twelve months after the reporting date. Terms of a liability that could, at the option of the counterparty, result in its settlement by the issue of equity instruments do not affect its classification.

*An operating cycle is the time between the acquisition of assets for processing and their realization in cash or cash equivalents. Where the normal operating cycle cannot be identified, it is assumed to have a duration of twelve months.

Bidders (Other than companies such as Partnership/Proprietorship firms) are required to submit the following details duly certified from their Auditor/Chartered accountant. (Table-A)

S.no. **(1)**	Particulars **(2)**	Total Value as per Balance Sheet (INR) **(3)**	Amount **(out of column no. 3) Receivable/ Due within 12 months from balance sheet date** or as per above definition of current assets and current liabilities **(4)**
A	Current Assets as per Balance sheet		……
B	Assets (**Excluding Fixed Assets**) **which are not specifically disclosed as current assets** in the Balance sheet.		
	a. Loans and Advances	……	……
	b. Investments (Including Fixed Deposits)	……	……
	c. Other asset **(Excluding Fixed Assets)** which are not classified as current assets	……	……
		Total Current Assets	**…… (X)**
C	Current Liabilities as per Balance sheet		……
D	Liabilities **which are not specifically disclosed as current liabilities** in the Balance sheet.		
	a. Bank Overdraft / Bank CC limit etc.*		……
	b. Secured Loans	……	……
	c. Unsecured Loans	……	……
	d. Provisions	……	……
	e. Other Liabilities which are not classified as current Liabilities.	……	……
		Total Current Liabilities	**…… (Y)**
	Working Capital **(X-Y)**		……

*Bank Overdraft/ Bank CC limit shall be treated as current liabilities only and accordingly same shall be filled in column 4 only.

6. **Turnover:** Turnover shall be calculated excluding GST & other Incomes.
7. In view of above definition of Net worth i.e. exclusion of certain reserves which shall not form part of Net worth, EIL reserve the right to seek the clarifications from bidder duly signed by their statutory auditor regarding the origin/creation of various reserves shown in the Balance Sheet.
8. Net Worth, Working Capital and Turnover has been calculated using the abovementioned formulae and after giving effect to the Impact of quantified qualified / adverse / disclaimer Auditor's opinion (if any) given in the Statutory Auditor's Report of the Bidder.

Signature with date

Sign and Stamp of Statutory auditor/ CA (on all pages)
Signature with date
Name & Designation:
UDIN [Applicable for CA in India]
Seal

BID DATA SHEET
(BDS)

BID DATA SHEET		
S.NO.	**CL. NO.**	**CONTENT**
1.	**ITB 3.0** **ELIGIBLE BIDDERS**	Enquiry Basis is Open Global Competitive Bidding
2.	**ITB 3.0** **ELIGIBILE BIDDERS** **NEW SUB-CLAUSE 3.9**	The following clause is NOT APPLICABLE for this enquiry. **3.9 BIDS FROM INDIAN/ FOREIGN COUNTERPART ON BEHALF OF FOREIGN BIDDER** Wherever a limited enquiry is issued to a foreign company, being approved OEM (the manufacturer) and enlisted with Owner/EIL, but the OEM requests to bid through a bidder which maybe his subsidiary or his parent or another subsidiary of his parent, following methodology shall be followed: **a.** A company shall be considered as subsidiary of its parent company if the parent company: ➢ Controls the composition of the board of directors of the subsidiary; or ➢ Controls more than half of the voting right of the subsidiary; or ➢ Owns more than half of the paid-up equity of the subsidiary; For the purpose of definition of subsidiary, if a company A is a subsidiary of company B which is, in turn, a subsidiary of company C then company A will be considered to be a subsidiary of company B as well as C. b. Bidder may be Indian or foreign. c. Bidder may or may not be a manufacturer of the offered products. d. Bidder may or may not be enlisted with EIL. e. In case bidder proposes to ship the material from a warehouse/ works which may or may not be enlisted with Owner/EIL, the same shall be considered acceptable subject to following conditions: i. All items to be sourced (duly inspected under TPI) from OEM except minor outsourced accessories and the methodology for their assembly by Bidder will be spelt out in the offer by bidder. ii. EIL/ Third Party Inspection (as applicable) shall be conducted before despatch of the items from OEM works. iii. OEM shall issue an authorization by the authorized signatory to the Bidder towards the above arrangement. iv. OEM shall furnish a backup corporate guarantee duly signed by the authorized signatory towards the performance of the equipment & accessories. v. In case engineering work is undertaken by bidder, responsibility matrix will be submitted, duly signed by OEM. vi. PO shall be on the Bidder and shall specify the

BID DATA SHEET		
S.NO.	**CL. NO.**	**CONTENT**
		OEM works as well as the final despatch point.
3.	**ITB 3.0** **ELIGIBILE BIDDERS** **NEW SUB-CLAUSE 3.10**	The following clause is NOT APPLICABLE for this enquiry. **3.10 BIDS FROM INDIAN/FOREIGN COUNTERPART ON BEHALF OF FOREIGN BIDDER** i. In case the enquiry is issued to a Foreign bidder on limited basis and offer is received from their Indian/Foreign counterpart on behalf of Foreign bidder, the same is acceptable provided counterpart furnishes authorization and confirmation from Foreign bidder that the commitment made by their counterpart during the bidding stage shall be acceptable to them. ii. In such a case, order shall be issued on Foreign bidder and material shall be supplied from their approved works only
4.	**ITB 12.1.1, ITB 19.0& ITB 21.0** **POSTAL ADDRESS & CONTACT DETAILS FOR SUBMISSION OF DOCUMENT (VIZ. BID SECURITY, ETC.)IN PHYSICAL FORM, IF ANY, AS PER RFQ**	**Jaydip Purkayastha, GM (SCM-C&P)** Engineers India Limited, EIL Office Complex, Sector 16, Gurugram-122004 Telephone: 0124 – 289 1346/ 1308 / 1287 e-mail id: munish.takhi@eil.co.in/ ranjit.vunna@eil.co.in / jaydip@eil.co.in
5.	**ITB 12.1.2** **LIST OF DOCUMENTS**	a. Documents required for meeting the Bid Qualification Criteria (As specified in IFB) b. Scanned copy of EMD/Bid Security c. Agreed Terms & Conditions for Foreign Bidder, duly filled and complete in all respect. d. Agreed Terms & Conditions for Indigenous Bidder or Indian Sub-supplier of Foreign Bidder, duly filled and complete in all respect. e. Bank Certified Mandate Form as per Form-A duly signed and stamped with the Banker's certification or cancelled cheque. f. Unpriced copy of Price Schedule duly indicating Quoted / Not Quoted (as applicable). g. Signed and stamped copy of Form-IA/IB/II, as applicable, (on Company's Letterhead) attached with Annexure-II of ITB in line with Government guidelines regarding procurement from bidders from a country or countries sharing Land Border with India. h. Scanned copy of Addendum / Amendment (if any). i. Integrity Pact duly signed, stamped and witnessed *(In case bidder intends to qualify based on the experience of back-up consultant/sub-contractor, then bidder shall also submit the Integrity pact duly signed by proposed back-up consultant/sub-contractor*) j. Duly signed Non-Disclosure Agreement-Not Applicable

BID DATA SHEET		
S.NO.	**CL. NO.**	**CONTENT**
		k. PAN, TRC & Form-10F (applicable for foreign bidder). l. GST Registration Certificate (applicable for indigenous bidder). m. Certificate of Incorporation, Memorandum/ Articles of Association. n. Power of Attorney (PoA) and/or Board Resolution in favour of Bid Signatory of the bidder as stipulated in ITB 20.0 in the e-bid. o. Power of Attorney (PoA) and/or Board Resolution in favour of Digital Signatory applicable if digital signatory is other than bid signatory as stipulated in ITB 20.0 in the e-bid. p. Any other document as stipulated in the bidding document.
6.	**ITB 34.0 & ITB 36.0** **EVALUATION OF TECHNO-COMMERCIAL BIDS & EVALUATION AND COMPARISON OF BIDS**	Evaluation shall be on ITEM WISE basis. 100% Input Tax Credit is available with PLL.
7.	**ITB 42.0 & SCC 2.2 (vi), SCC 6** **CONTRACT CUM PERFORMANCE BANK GUARANTEE (CPBG)**	APPLICABLE Note: i. Bidder may submit an Insurance Surety Bond in lieu of Performance Bank Guarantee. The Insurance Company issuing the Bond shall have a credit rating of AA from CRISIL / ICRA. This rating requirement shall not be applicable to Public Sector Insurance Companies.
8.	**ITB 42.0 & SCC 2.2 (vi), SCC 6** **CONTRACT CUM PERFORMANCE BANK GUARANTEE (CPBG)**	Bank Guarantees towards CPBG/ABG shall be accepted only when issued from a “Acceptable Bank”. The Definition of “Acceptable Bank” shall be as follows: ***"Acceptable Bank"*** *shall mean the State Bank of India constituted under the State Bank of India Act 1955; or a "Schedule Commercial Bank (in the category of Public Sector Banks and Private Sector Banks)" in India (as defined under the Reserve Bank of India Act, 1934) whose long term debt is rated at least AA+ (AA plus) by CRISIL Ltd. or assigned an equivalent rating by some other Indian Credit Rating Agency, ICRA, CARE or India Ratings, and acceptable to PLL in its sole discretion, or an international bank (having a branch in India)(Scheduled Foreign Banks in India) whose long term debt is rated at least A- (A minus) (or equivalent) by Standard & Poor Corporation / Fitch Ratings or A3 (or equivalent) by Moody’s Investor Services.”* In case, where more than one Rating is taken by Bank, lowest rating shall be considered for Acceptance of Bank. Any Foreign Bank which is not a Scheduled Foreign Bank

BID DATA SHEET		
S.NO.	**CL. NO.**	**CONTENT**
		in India is also acceptable provided that offered documents like BG/LC etc. are counter guaranteed by any Indian Bank meeting the criteria of Acceptable Bank.
9.	**ITB NEW CLAUSE 50.0** **SHIFTING OF ORDER**	The following clause is NOT APPLICABLE for this enquiry. **50.0 SHIFTING OF ORDER** The following philosophy shall be followed for shifting: Based on lowest evaluated item wise prices, the shifting shall be carried out provided the following conditions are met: i. Shifting shall be done only if shifting cost of each order is upto Rs. 2,00,000/-. ii. Shifting shall not be resorted to if the value of the order is more than 25% of the total order value of the recommendation. However, this ceiling will not be applicable where total order value of recommendation is upto Rs. 8.0 Lakh. iii. In case the order value on L1 bidder is more than Rs 5,00,000/- then shifting shall not be resorted to. With above shifting the selected bidder for award will be deemed to be L1 bidder.
10.	**SCC 2.0** **PAYMENT TERMS**	**INDIAN BIDDER** i. 02% against approval of drawings, wherever required (identified in PO/ PR/ Kick off Meeting / post order) at least in Code-2 / Code R and against submission of ABG of equivalent amount. ii. 03% against approval of drawings in Code-1 and against submission of ABG of equivalent amount. iii. 10% against placement of sub-orders to sub-vendors for Major raw material and submission of ABG of equivalent amount iv. 15% against receipt and identification of major specified raw materials at Supplier's works and against submission of ABG of equivalent amount v. 45% (50% where drawing/doc approval not required) against dispatch documents along with copy of LR, IRN and packing list, Invoice with full taxes, duties and transportation charges. vi. 10% against receipt and acceptance of material at site vii. 05% on receipt of all Final/As built Drawings/ Documents/ Data/ Manual in requisite number duly certified by Inspection agency as per VDR specified in Purchase Requisition and uploading the same in EIL-portal. viii. 10% on receipt of all material & acceptance of all materials at site. **FOREIGN BIDDER**

BID DATA SHEET		
S.NO.	**CL. NO.**	**CONTENT**
		i. 02% against approval of drawings, wherever required (identified in PO/ PR/ Kick off Meeting / post order) at least in Code-2 / Code R and against submission of ABG of equivalent amount. ii. 03% against approval of drawings in Code-1 and against submission of ABG of equivalent amount. iii. 10% thru wire transfer against placement of sub-orders to sub vendors for Major raw material and submission of BG of equivalent amount iv. 15% thru wire transfer against receipt and identification of major specified raw materials at Supplier's works and against submission of ABG of equivalent amount. v. 65% (70% in cases where drawing approval is not required) of PO value along with full Ocean freight (in case of CFR delivery basis) against shipping documents through irrevocable Letter of Credit/wire transfer. vi. 05% thru wire transfer on receipt of all Inspection agency certified Final/As built Drawings/Documents/Data/Manual in requisite number of copies/sets/ VDR specified in Purchase Requisition and uploading the same in EIL-portal.
11.	**SCC 2.0** **EIL vis-a-vis Supplier Commitments**	NOT APPLICABLE
12.	**SCC 3.0** **TRANSPORTATION**	ODC / CRITICAL CONSIGNMENT: NOT APPLICABLE
13.	**SCC 8.2** **PRICE VARIATION**	NOT APPLICABLE
14.	**SCC 11.0** **MARINE CUM INSURANCE DETAILS**	Marine Cum Erection Insurance Policy is enclosed Annexure to SCC.
15.	**SCC 12.1.5 & 12.2.6** **LOADING AND PENALTY CRITERIA (LPC) OF MR**	NOT APPLICABLE **LOADING AND PENALTY CRITERIA (LPC) OF MR** In partial modification to the provisions of LPC Criteria of MR, it is being clarified that Freight and Duties along with its applicable taxes (applicable for Foreign Bidder) shall also be considered for calculation of Total Cost and Capital Cost for calculation of Loading Amount.
16.	**SCC 16.0** **PART ORDER**	APPLICABLE (ITEM WISE)
17.	**GCC 24.0, SCC17.0**	APPLICABLE

BID DATA SHEET		
S.NO.	**CL. NO.**	**CONTENT**
	REPEAT ORDER	
18.	**SCC 19.0** TERMS & CONDITIONS FORSUPERVISION OF ERECTION, TESTING & COMMISSIONING /TRAINING AT SITE / HAZOP / SUPERVISION OF PGTR	NOT APPLICABLE
19.	**SCC 20.0** TERMS & CONDITIONS FOR INSTALLATION/SITE WORK	NOT APPLICABLE
20.	**SCC 21.0** TERMS & CONDITIONS FOR ANNUAL MAINTENANCE CONTRACT (AMC)	NOT APPLICABLE
21.	**SCC 22.0** TERMS & CONDITIONS FOR TRAINING AT SUPPLIER/OEM WORKS	NOT APPLICABLE
22.	**ANNEXURE II TO SCC CLAUSE NO. B-2 IMPORT DUTIES**	Merit Rate of Customs Duty shall be applicable for this enquiry.
23.	**IFB 11.0** **NEW CLAUSE TO IFB**	This clause is Not Applicable for subject case. **WHEREVER BIDDER IS INTENDING TO QUALIFY AS AT LEAST 51% OWNED INDIAN SUBSIDIARY OF A FOREIGN PRINCIPAL (AS PER MR/TECHNICAL BQC)** **In addition to the provision to the bidding document, Bidder shall comply the following:** • Extended warranty: The bidder shall provide extended warranty of 12 months over & above the guarantee/ warrantee period specified in the Bidding Document. **Additional PBG:** The Principal or the Group Company (as the case may be) shall furnish the Performance Bank Guarantee, equivalent to 5% of Total Contract Value. The performance Bank Guarantee by Principal or Group Company shall be additional to PBG (i.e. equivalent to 10% of the Total Contract Value) required to be submitted by the successful bidder. In case where Principal or the Group Company does not have Permanent Establishment in India as per Indian Income Tax Act, the bidding company (Bidder) can furnish Performance Bank Guarantee for an amount which is sum of PBG amount to be submitted by the bidder and additional PBG amount required to be submitted by the Principal or the Group company (i.e. equivalent of 15% of the Total Contract Value).

BID DATA SHEET		
S.NO.	**CL. NO.**	**CONTENT**
		Also, in such as case bidding company shall furnish an undertaking that their foreign based Principal or the Group Company, is not having any permanent establishment in India in terms of Income Tax Act of India. Undertaking from the Principal or the Group Company to the effect that in addition to invoking the PBG submitted by the bidding company, the PBG provided by the Principal or the Group Company can be invoked by PLL due to non-performance of the bidding company.

BIDDING FORMS

FORM-A

BANK MANDATE FORM
(As per ITB)

1. Bidder Name :
2. Bidder Code :
3. Address of the Bidder :
4. Particulars of Bank Account of Bidder :
   a. Name of the Bank :
   b. Name of the Branch and Address of the Branch :
   c. Branch Code : :
   d. 9-Digit MICR code Number of the Bank & Branch :
   (As appearing in the MICR Cheque issued by the bank) :
   (Please do not give multicity cheque book code :
   Number)
   e. Type of account (Saving Bank, Current or Cash Credit) :
   f. Account Number :
   g. RGTS/IFSC Code (11 digit) :
   h. NEFT Code No. :
5. E-mail address of the Bidder :
6. Contact Person(s) of the Bidder :

I/we declare that the particulars given above are correct and complete and I/we accord our consent for receiving all our payments through Electronic Mechanism.

_____
(Signature and designation of the Authorised person(s) of Bidder)

Official seal of the Bidder

Place :
Date :

BANK CERTIFICATION

Certified that the particulars furnished above are correct as per our records.
Place :
Date :

_____
Signature of the Authorised Official of the Bank

Bank's Stamp

FORM–B

FORMAT FOR BIDDERS' QUERIES (PRE-BID)
(AS PER ITB)

RFQ Document No. : _____

SL. NO.	REFERENCE OF ENQUIRY DOCUMENT				BIDDER'S QUERY	EIL REPLY
	PART/VOL.	PAGE NO.	CLAUSE NO.	SUBJECT		

NOTE:

1. **The Pre-Bid Queries in the above format shall be uploaded by the bidder on CPP Portal within the cut off date as per the bidding document.**

SIGNATURE OF BIDDER : _____

NAME OF BIDDER : _____

FORM-C

TAX RESIDENCY CERTIFICATE

TRC obtained by the Non-resident from Government of foreign country shall contain the following particulars:

1) Name of the assessee :

2) Status (individual, company, firm, etc.) of the assessee:

3) Nationality (in case of individual) :

4) Country or specified territory of incorporation or registration (in case of others):

5) Assessee's tax identification number in the country or specified territory of residence or in case of no such number, then a unique number on the basis of which the person is identified by the Government of the country or the specified territory:

6) Residential status for the purpose of Tax:

7) Period for which the certificate is applicable:

8) Address of the applicant for the period for which the certificate is applicable:

9) Name of the assessee:

FORM NO.10 F

[See sub-rule (1) of rule 21AB]

Information to be provided under sub-section (5) of section90 or sub-section (5) of section 90A of the Income-tax Act, 1961

I_____*son/daughter of Mr. _____in the capacity of ____ _____(designation) do provide the following information, relevant to the previous year _____*in my case/in the case of _____for the purposes of sub-section (5) of *section90/section 90A:-

Sl. No.	Nature of information		Details#
(i)	Status (individual, company, firm etc.) of the assessee	:	
(ii)	Permanent Account Number (PAN) of the assessee if allotted	:	
(iii)	Nationality (in the case of an individual) or Country or specified territory of incorporation or registration (in the case of others)	:	
(iv)	Assessee's tax identification number in the country or specified territory of residence and if there is no such number, then, a unique number on the basis of which the person is identified by the Government of the country or the specified territory of which the assessee claims to be a resident	:	
(v)	Period for which the residential status as mentioned in the certificate referred to in sub-section (4) of section 90 or sub-section (4) of section 90A is applicable	:	
(vi)	Address of the assessee in the country or territory outside India during the period for which the certificate, mentioned in (v) above, is applicable	:	

I have obtained a certificate referred to in sub-section (4) of section 90 or sub-section (4) of section 90A from the Government of _____(name of country or specified territory outside India).

Signature:
Name:
Address:
Permanent Account Number:

Verification

I_____do here by declare that to the best of my knowledge and belief what is stated above is correct, complete and is truly stated.

Verified today the____day of_____

_____
Signature of the person providing the information

Place:

Project / Client:

RFQ No.:

Item:

Notes:

a) Use capital letters and English language only.

b) Bidder to submit it duly signed and stamped on each page, as a token of their acceptance and confirmation(s) in respect of RFQ.

c) Bidder to note that fill in the blanks- data / details is to be entered by the bidder and correct option ticked in respect of Sl. Nos. 1,2,3,4,11,12 and 13 (the same are also highlighted in shaded grey in the table below).

d) Bidders are required to carefully fill their responses to below points along with submission of relevant documentary evidence as per the provisions of RFQ.

e) In case the responses are incomplete/ inconsistent and / or not substantiated by relevant document(s) the bidders are at risk of evaluation of their bid being concluded without affording them another opportunity to complete / correct / comply their submission with respect to RFQ requirements. In such a case EIL/ Owner reserves the right to complete the evaluation based on the available information and EIL/ Owners decision shall be final and binding.

SL. NO.	DESCRIPTION	BIDDER'S / SUPPLIER'S CONFIRMATION (Strike out response which is not applicable)
1.	a) Bidder/Supplier Name	
	b) Status of Bidder's Firm: Proprietorship/ Partnership/ Limited Liability Partnership / Public Ltd./ Pvt Ltd./ Govt Deptt./ PSU/ Others (Specify)	
	c) Supplier's Offer Ref No.& Date	
2.	Bidder's/ Supplier'sauthorized signatory's: a) Name: b) Tel. No.: c) Mob. No.: d) E-mail: e) Address (on which order is to be placed): *Note: Bidder to ensure that the Address mentioned here shall be in line with the* ***GST Certificate*** *and* ***Vendor enlistment in EIL (applicable for limited enquiries)***	
3.	a) Specify Despatch Point b) GSTIN no.	a) …….. b) …… In case different despatch points are applicable, specify use same as under:- ….

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

<table>
<tr><th>SL. NO.</th><th>DESCRIPTION</th><th>BIDDER'S / SUPPLIER'S CONFIRMATION
(Strike out response which is not applicable)</th></tr>
<tr><td>4.</td><td>Rate of GST</td><td>GST Rate (in %) _____ [If a single rate of GST is applicable]
If different rates of GST are applicable, specify the GST rates in the table below:
<table>
<tr><th>Description</th><th>GST rate in %</th></tr>
<tr><td>Supply & Freight</td><td></td></tr>
<tr><td>Site Work</td><td></td></tr>
<tr><td>3D Modelling</td><td></td></tr>
<tr><td>Supervision of E/T/C & PGTR</td><td></td></tr>
<tr><td>Hazop Study</td><td></td></tr>
<tr><td>Training at OEM/Vendor Works</td><td></td></tr>
<tr><td>Training at Site</td><td></td></tr>
<tr><td>PWAMC</td><td></td></tr>
<tr><td>Any other
(Please indicate nature)</td><td></td></tr>
</table></td></tr>
<tr><td>5.</td><td>Confirm that quoted prices are strictly as per Price Schedule format of the RFQ Document and following has been quoted in the Priced Part as per applicability in RFQ/Price Schedule:
a) Supply on FOT dispatch point basis
b) Mandatory Spares (wherever sought separately)
c) Site Work
d) Transportation
e) 2 years O&M Spares
f) Unit Rates for Addition/ Deletion
g) Unit rates for specific test
h) 3D Modelling
i) Hazop Study
j) Rates for Supervision of E/T/C & PGTR/ Training at Site/3D Modelling/Hazop Study
k) Training at Vendor/OEM Works
l) Overtime Rates for Supervision of E/T/C & PGTR
m) PWAMC</td><td>Confirmed</td></tr>
<tr><td>6.</td><td>Confirm that quoted prices will remain firm and fixed (except where price escalation/variation is allowed in the</td><td>Confirmed</td></tr>
</table>

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

SL. NO.	DESCRIPTION	BIDDER'S / SUPPLIER'S CONFIRMATION (Strike out response which is not applicable)
	RFQ) till complete execution of the order.	
7.	Confirm that firm transportation charges have been quoted in Price part. In case the same are not quoted in price part the Supply price shall be deemed to include the freight.	Confirmed
8.	Confirm that the offer is valid for the period specified in RFQ/BDS, from the final 'Bid Due Date'.	Confirmed
9.	Confirm submission of EMD/Bid Security (As applicable) as per provision of RFQ.	Confirmed
10.	Bidder's Undertaking Regarding Sharing Land Border with India: (Form-I A, II, whichever applicable) Format for Undertaking is appended with **Annexure-II to ITB.**	Submitted
11.	a) Bidder confirms that they are not on Holiday/Blacklist/Negative/Suspension/ Banning list of EIL/PLL as on date of submission of our bid.	Confirm / Not Confirm Note: In case response is not marked, "Confirm" shall be considered as Bidder's response
	~~b) Bidder confirms that they are not banned or delisted or black listed by any government department/ Government or Quasi Government agencies/ public sector as on date of submission of our bid.~~	~~Confirm / Not Confirm~~ ~~Note: In case response is not marked, "Confirm" shall be considered as Bidder's response~~
	c) Bidder confirms that they are not under liquidation, court receivership or similar proceedings.	Confirm / Not Confirm Note: In case response is not marked, "Confirm" shall be considered as Bidder's response
12.	a) Bidder confirms that they are not involved in any Litigation / Arbitration. b) In case response to a) above is 'Not Confirmed', Bidder hereby confirm that the current Litigation / Arbitration, in which they are involved will not have any impact in work being tendered or in entering into contract during the validity of offer and performing the contract till all the contractual obligations under contract are performed.	a) Confirmed / Not Confirmed *Note: In case response is not marked, "Confirmed" shall be considered as Bidder's response* b) Confirmed / Not Confirmed

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

SL. NO.	DESCRIPTION	BIDDER'S / SUPPLIER'S CONFIRMATION (Strike out response which is not applicable)
13.	Bidder confirms that: a) None of Directors (in Board of Director) of Bidder is a relative of any Director (in Board of Director) of PLL/ EIL OR b) The bidder is not a firm in which any Director (in Board of Director) of PLL/EIL or their relative is a partner.	a) Confirmed /Not Confirmed b) Confirmed / Not Confirmed If response is marked as "Not Confirmed", then provide relevant details…… *Note: In case response is not marked, "Confirmed" shall be considered as Bidder's response*
14.	Bidder confirms that there is no conflict of interest with other bidders, as per provisions of RFQ Document.	Confirmed
15.	We confirm that the content of the Bidding Document including Price schedule/ prices and Corrigendum / Addendum (if any) have not been altered or modified.	Confirmed
16.	Integrity Pact (if applicable as per IFB/LIB/RFQ): Bidder confirms that they comply with the provisions of Integrity Pact (IP) and have submitted IP duly signed and stamped. In respect of Integrity Pact (IP), Bidder confirms that: a) They have submitted the IP duly signed by authorised POA holder of the Bidder. b) IP is signed on all the pages. c) IP is signed by two witnesses. d) In case of 'Proprietorship firm', IP is signed by the Proprietor. e) In case of Partnership firm, IP is signed by atleast two partners of the firm. f) The correct name and number of RFQ is mentioned in the IP	Confirmed
17.	Bank Mandate We hereby undertake to submit the Bank mandate Form (refer elsewhere for format) along with first invoice/ bill submission, duly filled and certified by bank along with cancelled cheque. In case the same is not submitted along with first invoice, the subsequent date of submission of mandate form shall be considered as the date of invoice submission.	Confirmed
18.	Compliance to RFQ Documents We hereby agree to fully comply with, abide by and accept the RFQ/Enquiry documents including but not limited to	Confirmed

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

SL. NO.	DESCRIPTION	BIDDER'S / SUPPLIER'S CONFIRMATION (Strike out response which is not applicable)
	technical, commercial and other conditions including submission of CPBG within 30 days from date of LOA, technical specifications including general/ technical notes and scope of supply/work including documentation as per material requisition (MR) and subsequent technical/ commercial amendment, if any, and technical/commercial corrigendum, if any, without any variation, deviation or reservation.	
19.	Bidder understands that being a "Zero Deviation" bidding & in the case of submission of deviations, the evaluation of bid shall be done as per provisions of RFQ and the bid is liable for rejection.	Confirmed
20.	All commercial terms / compliance / salient details are given /confirmed in this ATC and not elsewhere in the Offer. Bidder to note that the terms and conditions mentioned elsewhere in their offer or Printed terms and conditions of the bidder, if any, appearing in quotation/offer, Bidder's own terms and conditions shall not be given cognizance of.	Confirmed

DECLARATION BY THE BIDDER:

We further confirm that the above declaration/confirmation (including the pre-filled / default response to be considered in case relevant option is not ticked/ not filled) are true and correct in all respects and not in conflict with the declaration mentioned in any part of our bid /any other document.In case of contradiction, the confirmation given herein by the bidder shall prevail over the declaration/ statement/ confirmation given in other places by the Bidder.

We also declare that in case, at a later date, if the above declaration(s) / confirmation(s) submitted in our bid are found to be false, bidder shall be held responsible for the same and EIL/Owner has every right to take action against the bidder / company, as deemed fit as per law of the land and provisions of RFQ Document and EIL/Owner's right to put our Company on Suspension/Banning list for future business with EIL/Owner.

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

Project / Client:
RFQ No.:
Item:
Notes: a) Use capital letters and English language only. b) Bidder to submit it duly signed and stamped on each page, as a token of their acceptance and confirmation(s) in respect of RFQ. c) Bidder to note that fill in the blanks- data / details is to be entered by the bidder and correct option ticked in respect of Sl. Nos. 1, 2, 3, 4, 5, 6, 7, 8(a-b), 10, 17, 18 and 19 (the same are also highlighted in shaded grey in the table below). **d) In case of Foreign bidder, if any supply/services are in the scope of their Indian sub-supplier, this format shall be accompanied with the ATC format for Indigenous bidder/Indian sub-supplier, duly filling up the relevant details.** e) Bidders are required to carefully fill their responses to below points along with submission of relevant documentary evidence as per the provisions of RFQ. f) In case the responses are incomplete/ inconsistent and / or not substantiated by relevant document(s) the bidders are at risk of evaluation of their bid being concluded without affording them another opportunity to complete / correct / comply their submission with respect to RFQ requirements. In such a case EIL/ Owner reserves the right to complete the evaluation based on the available information and EIL/ Owners decision shall be final and binding.

SL. NO.	DESCRIPTION	BIDDER'S / SUPPLIER'S CONFIRMATION (Strike out response which is not applicable)
1.	a) Bidder/Supplier Name	
	b) Status of Bidder's Firm: Proprietorship/ Partnership/ Limited Liability Partnership / Public Ltd./ Pvt Ltd./ Others (Specify)	
	c) Supplier's Offer Ref No.& Date	
2.	Bidder's/ Supplier's authorized signatory's: a) Name: b) Tel. No.: c) Mob. No.: d) E-mail: e) Address (on which order is to be placed): *Note: Bidder to ensure that the Address mentioned here shall be in line with the **Vendor enlistment in EIL (applicable for limited enquiries)***	
3.	International Seaport of Exit Basis / FCA Airport of Exit	
4.	a) Country of Origin from where the goods are being offered.	a) _____

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

SL. NO.	DESCRIPTION	BIDDER'S / SUPPLIER'S CONFIRMATION (Strike out response which is not applicable)
	b) Bidder hereby confirms that Certificate of country of origin, issued/attested by Local chamber of commerce/trade association, shall be furnished by the seller at no extra cost (i.e. shall be borne by seller).	b) Confirmed
5.	Indicate shipping weight (net and gross) of the consignment.	
6.	Indicate size of the consignment as applicable	
7.	Indicate the HSN Tariff Code of the Items & Classification	
8.	a) Confirm whether any Free Trade Agreement (FTA) or Comprehensive Economic Partnership Agreement (CEPA) or any such multi-lateral / bi-lateral Agreement or Treaty with India or under Generalized System of Preference (GSP); or under any other notification (allowing lower rate of Custom Duty). In case, bidder does not declare specifically Yes / No, it shall be presumed that no such Multilateral / Bilateral Trade Agreement exists between Bidder's country & India.	YES / NO (Please tick any one)
	b) In case Multilateral / Bilateral trade agreement is applicable as per 8(a) above, please furnish the details.	
	c) Confirm that in case of any Multilateral / Bilateral trade agreement, the Supplier shall be liable to provide all documentation to ensure for availing the exemption/waiver.	Confirmed
	d) In case the Supplier defaults on this due to any reason, whatsoever, they shall be liable to bear the incremental Customs Duty applicable, if any.	Confirmed
	e) Confirm that any Customs Duty Applicability on account of any change in bi-lateral/multi-lateral agreement shall be to seller's account.	Confirmed
	f) Confirm that documentation to be furnished for availing the exemption/waiver of Customs Duty shall be specifically listed in the Letter of Credit also as the pre-requisite for release of payment against shipping documents and this documentation shall necessarily form a part of shipping documents	Confirmed
9.	Currency of Quote (EUR/USD/GBP/JPY):	As per Price Schedule
10.	Banker's address & details for L/C opening along with telephone number/e-mail address, SWIFT Code and Account Number.	

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

SL. NO.	DESCRIPTION	BIDDER'S / SUPPLIER'S CONFIRMATION (Strike out response which is not applicable)
	Same details shall be considered for wire transfer/payment.	
11.	Confirm that quoted prices are strictly as per Price Schedule format of the RFQ Document and following has been quoted in the Priced Part as per applicability in RFQ/Price Schedule: a) Supply on FOB/FCA port of exit basis b) Mandatory Spares (wherever sought separately) c) Site Work d) Ocean Freight e) 2 years O&M Spares f) Unit Rates for Addition/ Deletion g) Unit rates for specific test h) 3D Modelling i) Hazop Study j) Rates for Supervision of E/T/C & PGTR/ Training at Site/3D Modelling/Hazop Study k) Training at Vendor/OEM Works l) Overtime Rates for Supervision of E/T/C & PGTR m) PWAMC	Confirmed
12.	Confirm that quoted prices will remain firm and fixed (except where price escalation/variation is specifically allowed in the RFQ) till complete execution of the order.	Confirmed
13.	Confirm that firm transportation/freight charges have been quoted in Price part. In case the same are not quoted in price part the Supply price shall be deemed to include the freight.	Confirmed
14.	Confirm that the offer is valid for the period specified in RFQ/BDS, from the final 'Bid Due Date'.	Confirmed
15.	Confirm submission of EMD/Bid Security (As applicable) as per provision of RFQ.	Confirmed
16.	Bidder's Undertaking Regarding Sharing Land Border with India: (Form-I A, II, whichever applicable) Format for Undertaking is appended with **Annexure-II to ITB.**	Submitted
17.	a) Bidder confirms that they are not on Holiday/Blacklist/Negative/Suspension/ Banning list of EIL/PLL as on date of submission of our bid.	Confirm / Not Confirm Note: In case response is not marked, "Confirm" shall be considered as Bidder's response
	~~b) Bidder confirms that they are not banned or delisted or black listed by any government department/~~	~~Confirm / Not Confirm~~

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

SL. NO.	DESCRIPTION	BIDDER'S / SUPPLIER'S CONFIRMATION (Strike out response which is not applicable)
	~~Government or Quasi Government agencies/ public sector as on date of submission of our bid.~~	~~Note: In case response is not marked, "Confirm" shall be considered as Bidder's response~~
	c) Bidder confirms that they are not under liquidation, court receivership or similar proceedings.	Confirm / Not Confirm Note: In case response is not marked, "Confirm" shall be considered as Bidder's response
18.	a) Bidder confirms that they are not involved in any Litigation / Arbitration. b) In case response to a) above is 'Not Confirmed', Bidder hereby confirm that the current Litigation / Arbitration, in which they are involved will not have any impact in work being tendered or in entering into contract during the validity of offer and performing the contract till all the contractual obligations under contract are performed.	a) Confirmed / Not Confirmed *Note: In case response is not marked, "Confirmed" shall be considered as Bidder's response* b) Confirmed / Not Confirmed
19.	Bidder confirms that: a) None of Directors (in Board of Director) of Bidder is a relative of any Director (in Board of Director) of PLL/ EIL OR b) The bidder is not a firm in which any Director (in Board of Director) of PLL/EIL or their relative is a partner.	a) Confirmed /Not Confirmed b) Confirmed / Not Confirmed If response is marked as "Not Confirmed", then provide relevant details…… *Note: In case response is not marked, "Confirmed" shall be considered as Bidder's response*
20.	Bidder confirms that there is no conflict of interest with other bidders, as per provisions of RFQ Document.	Confirmed
21.	We confirm that the content of the Bidding Document including Price schedule/ prices and Corrigendum / Addendum (if any) have not been altered or modified.	Confirmed
22.	Integrity Pact (if applicable as per IFB/LIB/BDS): Bidder confirms that they comply with the provisions of Integrity Pact (IP) and have submitted IP duly signed and stamped. In respect of Integrity Pact (IP), Bidder confirms	Confirmed

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

SL. NO.	DESCRIPTION	BIDDER'S / SUPPLIER'S CONFIRMATION (Strike out response which is not applicable)
	that: a) They have submitted the IP duly signed by authorised POA holder of the Bidder. b) IP is signed on all the pages. c) IP is signed by two witnesses. d) In case of 'Proprietorship firm', IP is signed by the Proprietor. e) In case of Partnership firm, IP is signed by atleast two partners of the firm. f) The correct name and number of RFQ is mentioned in the IP	
23.	Compliance to RFQ Documents We hereby agree to fully comply with, abide by and accept the RFQ/Enquiry documents including but not limited to technical, commercial and other conditions including submission of CPBG within 30 days from date of LOA, technical specifications including general/ technical notes and scope of supply/work including documentation as per material requisition (MR) and subsequent technical/ commercial amendment, if any, and technical/commercial corrigendum, if any, without any variation, deviation or reservation.	Confirmed
24.	Confirm that all information required in line with the prevalent provisions of income tax including but not limited to TRC, FORM - 10F, PAN etc., as per Bidding Forms shall be submitted before release of any payment or within one month of the release of order, whichever is earlier.	Confirmed
25.	Bidder understands that being a "Zero Deviation" bidding & in the case of submission of deviations, the evaluation of bid shall be done as per provisions of RFQ and the bid is liable for rejection.	Confirmed
26.	All commercial terms / compliance / salient details are given /confirmed in this ATC and not elsewhere in the Offer. Bidder to note that the terms and conditions mentioned elsewhere in their offer or Printed terms and conditions of the bidder, if any, appearing in quotation/offer, Bidder's own terms and conditions shall not be given cognizance of.	Confirmed

DECLARATION BY THE BIDDER:

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

We further confirm that the above declaration/confirmation (including the pre-filled / default response to be considered in case relevant option is not ticked/ not filled) are true and correct in all respects and not in conflict with the declaration mentioned in any part of our bid /any other document. In case of contradiction, the confirmation given herein by the bidder shall prevail over the declaration/ statement/ confirmation given in other places by the Bidder.

We also declare that in case, at a later date, if the above declaration(s) / confirmation(s) submitted in our bid are found to be false, bidder shall be held responsible for the same and EIL/Owner has every right to take action against the bidder / company, as deemed fit as per law of the land and provisions of RFQ Document and EIL/Owner's right to put our Company on Suspension/Banning list for future business with EIL/Owner.

BIDDER'S NAME AND SIGNATURE WITH STAMP/SEAL

Copyrights EIL-All rights reserved

INSTRUCTIONS
TO
BIDDER

FOR PDH PP PLANT WITH ETHANE AND PROPANE HANDLING FACILITIES AT DAHEJ PROJECT
(EIL JOB NO: B862)

TABLE OF CONTENTS

A GENERAL 4

1.0 SCOPE OF BID 4
2.0 CORRUPT AND FRAUDULENT PRACTICES 5
3.0 ELIGIBLE BIDDERS 5

B CONTENTS OF BIDDING DOCUMENT 7

4.0 BIDDING DOCUMENT 7
5.0 SITE VISIT 8
6.0 CLARIFICATION OF BIDDING DOCUMENT, PRE-BID MEETING & SITE VISIT 9
7.0 AMENDMENT OF BIDDING DOCUMENT 10
8.0 ACKNOWLEDGEMENT & CONFIRMATION 11

C PREPARATION OF BIDS 11

9.0 COST OF BIDDING 11
10.0 ZERO DEVIATION: 11
11.0 LANGUAGE OF BID 11
12.0 DOCUMENTS COMPRISING THE BID 11
13.0 INTEGRITY PACT (APPLICABILITY SHALL BE AS PER IFB/LIB/RFQ) 13
14.0 ALTERNATIVE OFFER / MULTIPLE BIDS 14
15.0 BID PRICES AND DISCOUNTS 14
16.0 CURRENCIES OF BID AND PAYMENT 15
17.0 QUALIFICATION OF THE BIDDER 15
18.0 PERIOD OF VALIDITY OF BIDS 15
19.0 BID SECURITY / EARNEST MONEY DESPOSIT [REFER IFB/LIB/RFQ FOR APPLICABILITY] 15
20.0 FORMAT AND SIGNING OF BID 18

D SUBMISSION AND OPENING OF BIDS 19

21.0 SEALING AND MARKING OF BIDS 19
22.0 DEADLINE FOR SUBMISSION OF BIDS 20
23.0 LATE BIDS 20
24.0 WITHDRAWAL, SUBSTITUTION, AND MODIFICATION OF BIDS 20
25.0 BID OPENING 21

E EVALUATION AND COMPARISON OF BIDS 21

26.0 CONFIDENTIALITY AND COMMUNICATION PROTOCOL 21
27.0 DEVIATIONS, RESERVATIONS, AND OMISSIONS 22
28.0 DETERMINATION OF RESPONSIVENESS 23
29.0 CLARIFICATION OF BIDS 24
30.0 EVALUATION OF TECHNO-COMMERCIAL BIDS 24
31.0 OPENING OF PRICE BID 25
32.0 CORRECTION OF ARITHMETICAL ERRORS 25
33.0 CONVERSION TO SINGLE CURRENCY 26
34.0 EVALUATION AND COMPARISON OF PRICE BIDS 26
35.0 OWNER/EIL'S RIGHT TO ACCEPT ANY BID, AND TO REJECT ANY OR ALL BIDS 27
36.0 DELETED 27

F AWARD OF CONTRACT 27

37.0 AWARD CRITERIA 27
38.0 REVERSE AUCTION 27
39.0 DELETED 28
40.0 SITUATIONS IN WHICH THE AWARD CAN BE RESORTED TO L2 BIDDER 28

41.0 NOTIFICATION OF AWARD 28
42.0 CONTRACT PERFORMANCE BANK GUARANTEE 28
43.0 DELETED 29
44.0 PROCUREMENT FROM A BIDDER FROM A COUNTRY SHARING LAND BORDER WITH INDIA 29
45.0 NON-APPLICABILITY OF ARBITRATION CLAUSE IN CASE OF BANNING OF VENDORS/SUPPLIERS/CONTRACTORS/BIDDERS/CONSULTANTS INDULGED IN FRADULENT/COERCIVE PRACTICES 29
46.0 PROCEDURE FOR ACTION IN CASE CORRUPT/ FRAUDULENT/COLLUSIVE/ COERCIVE PRACTICES 30
47.0 COMPLIANCE OF PLL INSIDER'S TRADING: 30
48.0 UNIQUE DOCUMENT IDENTIFICATION NUMBER 31
49.0 TRADE RECEIVABLE DISCOUNTING SYSTEM (TREDS) 31

A GENERAL

1.0 SCOPE OF BID

1.1 In connection with the Invitation for Bids/ Letter Inviting Bid, Engineers India Limited on behalf of Petronet LNG Limited (Petronet LNG Petrochemical Project) invites e-Bid(s), under single stage single/two bid system (Refer BDS), for the entire scope of supply and services covered under the Bidding Document.

1.2 Throughout the Bidding Document:

(a) Owner/Buyer/Purchaser means Petronet LNG Limited (PLL), a company having its registered office at 4th Floor, Tower I, World Trade Centre, Nauroji Nagar, New Delhi, 110 029, India.

(b) EIL means Engineers India Limited, a company incorporated under the Companies Act, 1956 having its registered office at 1, Bhikaiji Cama Place, R.K Puram, New Delhi-110066 (INDIA), acting as a Consultant for the Project.

(c) except where the context requires otherwise, words indicating the singular also include the plural and words indicating the plural also include the singular and word written in capital or small letter or where the first letter is capital have the same meaning.

(d) “day” means calendar day.

(e) E-Tendering website (or e-procurement CPP portal / CPPP/ E-tenderingsystem/ e-Procurement Portal/ e-tendering portal) means online portal on which Bidders are required to submit their bid. For this RFQ, e tendering websiteis **https://eprocure.gov.in/eprocure/app**

(f) Unless mentioned otherwise, the term ‘Bid Due Date’ shall mean the ‘Final Bid Due Date’.

(g) “Instructions to Bidders” shall mean the documents describing the manner in which Bidder shall prepare and submit his bid.

(h) The term “bid”/ “tender” / “offer” / “proposal” and their derivatives (“RFQ/Bidding/Enquiry” documents, “bidder/tenderer”, “Vendor/Supplier/Seller”, “Bid/tender”, “bidding/tendering”, “Contract/Purchase Order” etc.) are synonymous.

(i) “Tender Document” or “Bidding Document” shall mean the documents issued to the bidder and/ or uploaded on tender portal, including any subsequent addenda to enable bidder submit his Bid.

(j) “Bidder” or “Tenderer” shall mean the person or company who receives the Tender Document and submits Tender or Bid to EIL either in response to Limited tendering or Open tendering.

(k) Material Requisition (MR) means the Technical Part of RFQ Document.

(l) **INCOTERM 2020:** INCOTERM 2020 means the terms which shall be applicable for procurement of equipment/material under the subject RFQ / Enquiry document.

(m) BoQ/ Price Schedule (PS) / Schedule of Rate (SOR)/ Schedule of Prices (SOP) shall have the same meaning.

1.3 The successful bidder / “supplier” shall complete the Scope of RFQ within the Time Period/Completion Period stated in RFQ document.

2.0 CORRUPT AND FRAUDULENT PRACTICES

2.1 The Owner requires that Bidders/ Vendors/ Supplier observe the highest standard of ethics during the award/ execution of Contract. "Fraudulent Practice" means a misrepresentation of facts in order to influence the award of a Contract to the detriment of the Owner, and includes collusive practice among bidders (prior to or after bid submission) designed to establish bid prices at artificial non-competitive levels and to deprive the owner of the benefits of free and open competition.

2.2 The Owner will reject a proposal for award if it determines that the bidder recommended for award has engaged in fraudulent practices in competing for the Contract in question.

2.3 Bidder is required to furnish the complete and correct information/ documents required for evaluation of their bids. If the information/ documents forming basis of evaluation is found to be false/ forged, the same shall be considered adequate ground for rejection of bids and forfeiture of Bid Security.

2.4 In case, the information/ document furnished by the Bidder/ Vendor/ Supplier forming basis of evaluation of his bid is found to be false/ forged after the award of the contract, Owner shall have full right to terminate the contract and get the remaining job executed at the risk & cost of such Bidder/ Vendor/ Supplier without any prejudice to other rights available to Owner under the contract such as forfeiture of CPBG, withholding of payment etc.

2.5 In case, this issue of submission of false documents comes to the notice after execution of supply/work, Owner shall have full right to forfeit any amount due to the Bidder/ Vendor/ Supplier along with forfeiture of CPBG furnished by the bidder/vendor/ Supplier.

2.6 Further, such bidder/ vendor/ Supplier shall be put on Blacklist/ Holiday/ Negative Suspension/Banning List of Owner debarring them from future business with EIL/Owner for a time period, as per the prevailing policy in Owner/EIL.

2.7 EIL, being the Consultant for the Owner in this Project reserves the right to take action against the defaulting Bidder/supplier/contractor in this tender/PO/ Contract including putting the Bidder/supplier/contractor on the Suspension/ Banning list of EIL. For this purpose, EIL may decide the same considering the communications carried out by the client with the Bidder/supplier/ contractor (including show cause notice/ personal hearing, etc).

2.8 In case any bidder is found to be involved in cartel formation/ bid-rigging /collusive bidding, his bid will not be considered for evaluation/ placement of order. Such bidder will also be debarred from bidding in future.

3.0 ELIGIBLE BIDDERS

3.1 An Eligible bidder may be a firm or a company, who, have been issued/intimated for issuance of RFQ/LIB Document on Limited Competitive Basis or a bidder meeting the BQC criteria as per) Invitation for Bids (IFB)/ Notice Inviting Tender (NIT) on Open Competitive basis. **(Refer BDS)**

3.2 In case of limited competitive basis, the bidding is open only to the bidders to whom Bidding Document has been issued or intimation for issuance of Bidding Document has been sent through EIL tender portal. Refer BDS for type of bidding.

3.3 In case of open competitive basis, the bidding is open to the bidder who intends to submit the Bid, in response to IFB/NIT.

3.4 A bidder who is on **Black-listing / Holiday Listing /Suspension / Banning List/ Negative List** of EIL/PLL on due date of submission of bid / during the process of evaluation of the bids, the offers of such bidders shall not be considered for bid opening/evaluation/award.

Similarly, if a bidder is seeking qualification based on engaging a sub-contractor / sub-vendor who meets stipulated qualification criteria (in case allowed as per IFB/NIT) and such a sub-contractor / sub-vendor is on Black-listing / Holiday Listing /Suspension / Banning List/ Negative List of EIL / PLL on due date of submission of bid / during the process of evaluation of the bids, the offer of such bidder shall not be considered for bid opening/evaluation /award.

3.5 Bidder should be not under Liquidation, Court receivership or similar proceedings. Bidder to submit self-certificate in this regard.

In case Bidder(s) affirms that present litigations/arbitrations have impact on their obligations to perform the Contract or doesn't provide the affirmations as above, their bids shall be rejected.

Note : In case it comes to the notice of PLL/EIL that the bidder has given wrong declaration in this regard, the same shall be dealt as 'fraudulent practices' and action shall be initiated as per the procedure for action in case of corrupt / Fraudulent / collusive / coercive practices.

3.6 Bidder to comply the guidelines of Department of Expenditure (DOE)vide O.M. No. 7/10/2021-PPD (1) dated 23.02.2023for Restriction on procurement from Bidders from Country(ies) sharing Border with India. Refer Cl. No. 44 of this ITB for details.

3.7 The bidder found to have a conflict of interest shall be disqualified.

Bidder's conflict of interest as Consultant of EIL/ Owner:

Consultants or any of their Affiliates will not be considered for any assignment, which by its nature may be in conflict with another assignment of the consultants.

Bidder's conflict of interest with other bidders:

A bidder shall not have conflict of interest with other bidders. Such conflict of interest can lead to anti-competitive practices to the detriment of Owner's interests. The bidder found to have a conflict of interest shall be disqualified

A bidder may be considered to have a conflict of interest with one or more parties in this bidding process, if:-

a. they have controlling partner(s) in common; or
b. they receive or have received any direct or indirect subsidy/ financial stake from any of them; or
c. they have the same legal representative/agent for purposes of this bid; or

d. they have relationship with each other, directly or through common third parties, that puts them in a position to have access to information about or influence on the bid of another Bidder; or.
e. Bidder or any of its affiliates participated as a consultant in the preparation of the design or technical specifications of the contract that is the subject of the Bid;
f. In case of a holding company having more than one independently manufacturing units, or more than one unit having common business ownership/management, only one unit should quote. Similar restrictions would apply to closely related sister companies. Bidders must proactively declare such sister/ common business/ management units in same/ similar line of business.

3.8 The Bidder shall not be under a declaration of ineligibility by Purchaser for Corrupt/ Fraudulent/ Collusive/ Coercive practices, as defined elsewhere.

B CONTENTS OF BIDDING DOCUMENT

4.0 BIDDING DOCUMENT

4.1 The RFQ document consisting of Commercial & Technical Section has been hosted on e-procurement website (i.e. https://eprocure.gov.in/eprocure/app). However, a link shall be provided in EIL website http://tenders.eil.co.in.

4.2 The Bidding Document shall in general consist of the following and should be read in conjunction with any amendment issued in accordance with Clause No. 7 of ITB.

- Invitation for Bid (IFB)/ Request for Quotation (RFQ).
- Bid Data Sheet
- Instructions to Bidders and its attachments/annexure.
- Bidding Forms
- Format for Performance Bank Guarantee and Bank Guarantee for Advance
- Packing, Marking, Shipping and Documentation Specification
- Additional Documents Mentioned in RFQ /LIB/BDS
- General Conditions of Contract (GCC) for Goods.
- Special Purchase Conditions (SPC) and its Annexure.
- Schedule of Rates (SOR)/ Schedule of Prices (SOP).
- **Material Requisition (MR)** comprising Scope details, data sheet, Technical Specifications / Standards, Drawings, if any Drawings, if any

4.3 Although all the details presented in this Bidding Document have been compiled with reasonable care, the bidder is expected to examine the Bidding Document, including all instructions, forms, terms, specifications and drawings in the Bidding Document and it includes all the documents as per Table of Contents. In case of any ambiguity or incompleteness, the bidder must bring it to the attention of EIL immediately and prior to submission of Bid.

4.4 The bidder is expected to examine the RFQ document downloaded from the e-Procurement Portal, bidding guidelines receipt from EIL or available on EIL website, all instructions, formats, terms, specifications and drawings etc., enclosed in the RFQ

documents. The invitation for bid (bidding) together with all its attachment thereto, shall be considered to be read, understood and accepted by the bidder in co-ordination to each other. Failure to furnish all information required by the RFQ documents or submission of a bid not substantially responsive to the RFQ documents in every respect will be at bidder's risk and may result in the rejection of the Bid.

4.5 Without prejudice to provisions indicated elsewhere, Bidding document once issued in case of limited competitive bidding is non-transferable. However, in case of Open Competitive Bidding, since the Bidding Document is available for free downloading on the portal, any bidder may submit the Bid and the same shall be evaluated in line with the provisions of the Bidding Document.

4.6 Order of precedence

The documents forming the Purchase Order are to be taken as mutually explanatory of one another. If there is an ambiguity or discrepancy in the Term & Conditions defined in the various documents, the order of Precedence shall be as follows:

i. Purchase Order and its enclosures along with Purchase Requisition
ii. Amendment to Bidding Document, if any
iii. Bid Data Sheet (BDS)
iv. Job Specifications
v. Drawings
vi. Technical specifications
vii. Special Purchase Conditions (SPC)
viii. General Conditions of Contract (GCC) for Goods & Packing, Marking, Shipping and Documentation Specification
ix. Request for Quotation (RFQ)/Invitation for Bids (IFB)
x. Instructions to Bidders (ITB)
xi. Other Documents

A variation or amendment issued after the execution of the formal contract shall take precedence over respective clauses of the formal contract and it's Annexures.

5.0 SITE VISIT

5.1 For Scope involving Site Work, bidder, if required, may visit and examine the Project Site and its surroundings and obtain for itself on its own responsibility all information that may be necessary for preparing the bid.

5.2 Bidder is advised to visit and examine the site (at his own cost), its surroundings and familiarise themselves of the existing facilities & environment, and collect all other information which he may require for preparing and submitting the bid and entering into the Contract. Claims and objections due to ignorance of existing conditions or inadequacy of information will not be considered after submission of the bid and during implementation.

Bidder shall provide at least two days in advance the details of their representatives along with details of laptop, mobile or any other electronic device or any equipment if any, being carried so as to make arrangement for gate passes. Owner's decision on this regard shall be final and binding upon the bidder.

5.3 Bidder and any of its personnel will be granted permission by EIL/Client to enter upon its premises and lands/ Project Site for the purpose of such visit, but only upon the express condition that the bidder and its personnel will relieve and indemnify EIL/Client and its personnel from and against all liability in respect thereof, and will be responsible for death or personal injury, loss of or damage to property, and any other loss, damage, costs, and expenses incurred as a result of the inspection.

5.4 For site visit, Bidder may contact the following person:

Mr. Pramod Tiwary, GM (Construction) • Projects
Mail id - pramodtiwari@petronetlng.in
Contact - 95582 53796
Petronet LNG Limited
Denotified SEZ Z/97, Z/98, Z/99
Petronet LNG Petrochemical Project

6.0 CLARIFICATION OF BIDDING DOCUMENT, PRE-BID MEETING & SITE VISIT

6.1 The enquiry is issued on **"Zero Deviation Bidding"** basis wherein no post bid correspondence of any nature may be entertained. Bidders in their own interest are advised to take part in the pre-bid meeting seriously by issuing their genuine queries and also by attending the pre-bid meeting by their competent personnel. This will help bidder not only to cut short of the evaluation time leading to requirement of shorter bid validity but also enable them to submit their best prices based on the clear techno-commercial scope.

6.2 Pre-bid meeting shall be attended by competent representative(s) of the bidder.

6.3 Bidder's authorized representative(s) shall attend the pre bid meeting on the prescribed day at the given venue specified in RFQ. During the pre-bid meeting, all the technical and commercial issues shall be discussed and concluded to ensure that the bid received subsequent to pre bid meeting shall be without any deviations to terms and conditions. Hence, bidders shall treat the pre bid meeting as utmost important and depute competent & senior person capable of taking on the spot decision to sort out all the technical and commercial issues.

However, in case any bidder does not attend the pre bid meeting, it shall be understood that the bidder has a clear understanding of the scope, terms & conditions of the bidding document and does not have any comments/ deviations to the requirements of the bidding document.

6.4 In order to ensure fruitful discussions during pre-bid meeting, the bidder is requested to submit any queries/clarification/information pertaining to Bidding document in writing in the format provided in Bidding Forms.

Bidder shall submit their queries only through NIC CPP portal strictly on or before cut-off date mentioned in IFB/LIB after which, EIL shall reserve the right not to

entertain any queries. Queries sent through e-mails or any other mode by any bidder may not be given any cognizance.

Bidder shall submit their queries strictly within cut-off date after which, EIL/Owner shall reserve the right not to entertain any queries.

6.5 The bidders are required to participate in the pre-bid meeting after going through the entire bidding document along with BQC. Bidder shall come with all technical and commercial points on which they need clarifications and also to ensure that they possess all the supporting documentation for meeting the BQC. In case of any doubt, they may discuss the same during the meeting to avoid any techno-commercial clarifications/ discussions post bid.

6.6 Replies to the pre-bid queries will be uploaded on e-procurement CPP portal expeditiously as possible. After cut-off date for submission of pre-bid queries, no further queries will be entertained from the bidders. The response of EIL shall not form part of the Bidding Document unless issued as an Addendum/ Amendment.

6.7 Any modification of the Bidding Document, which may become necessary as a result of the pre-bid discussion, shall be intimated to all bidders through the issue of an Addendum/Amendment.

6.8 The applicable Form towards compliance to Bid Requirements & conforming no-deviation and techno-commercial compliance shall be signed and submitted by the bidders as part of their offer. Bidder in their own interest shall submit bid fully complying with Bidding Document requirements and EIL shall reserve the right to proceed with the available compliant bids for evaluation without raising any technical/ commercial queries.

6.9 Technical/ Commercial queries (TQ/CQ) shall not be issued once the bid have been opened. However, wherever CQ/ TQ are unavoidable, the same shall be raised and the cut-off date given for CQ/ TQ replies shall be adhered to. CQ/ TQs shall be issued through E-tendering portal and Bidder shall submit their replies through E-tendering portal only. Accordingly, CQ/ TQ replies through any other mode (e-mail, physical form) shall not be accepted. Offers shall be evaluated based on the information available upto cut-off date for CQ/ TQ replies. Bidder shall not submit any Price/ Price implication against TQ/ CQ raised unless specifically sought in writing.

7.0 AMENDMENT OF BIDDING DOCUMENT

7.1 At any time prior to the deadline for submission of bids, EIL may, for any reason whether at his own initiative or in response to the clarification requested by the prospective bidder(s), issue amendment in the form of Amendment/ Addendum/Corrigendum.

7.2 Any addendum issued shall be part of the Bidding Documents and shall be uploaded on e-procurement CPP portal. However, Record Notes of Pre-bid Meeting/ Reply to Pre-bid Queries containing clarification shall not be considered a part of bidding document.

7.3 To give bidders reasonable time in which to take an addendum into account in preparing their bids, EIL may extend the deadline for the submission of bids, pursuant to Clause 22.3 of ITB.

7.4 In exceptional circumstances, EIL may also for any reason issue amendment subsequent to opening of un-priced bids. Any amendment thus issued shall become part of Bidding

Document. Bidder shall follow the instructions issued along with Amendment with regard to submission of impact on quoted price / revised price, if any.

8.0 ACKNOWLEDGEMENT & CONFIRMATION

8.1 Within 3 days of downloading of Bidding Document, bidder shall acknowledge and confirm his intention to bid for the tendered work on EIL website http://tenders.eil.co.in.

8.2 In case of limited competitive bidding, Bidders should respond to this enquiry either by submitting their bids or chooses to regret by explaining the reason for non-submission of the offer. In case there is no response either way continuously, the bidder may be liable for suitable action including review of their enlistment with EIL for that particular item.

C PREPARATION OF BIDS

9.0 COST OF BIDDING

Bidder shall bear all costs associated with the preparation and submission of their Bid, and EIL shall not be responsible or liable for those costs, regardless of the conduct or outcome of the bidding process.

10.0 ZERO DEVIATION:

10.1 Bidders to note that enquiry is issued on Zero deviation basis. Bids are to be submitted on Zero deviation basis and in strict compliance with the terms & conditions, scope, specifications and other stipulations contained in the tender/ enquiry without any deviations.

10.2 In view of this Bidder shall ensure submission of complete bid without any deviation as per requirement of Bidding Document in first instance itself.

11.0 LANGUAGE OF BID

11.1 The Bid, as well as all correspondence and documents relating to the bid exchanged by the bidder and EIL/Owner, shall be in the English language. Supporting documents and printed literature that are part of the Bid may be in another language provided they are accompanied by an accurate translation of the relevant passages in the English language, in which case, for purposes of interpretation of the Bid, such translation shall govern.

11.2 In the event of submission of any document/ certificate by the bidder in a language other than English, the bidder shall get the same translated into English. The English translation copy of the same shall also be furnished duly certified, stamped and signed by Local Chamber of Commerce or Indian Embassy in their country or their Embassy in India or any translator in India recognized / authorized by their Embassy.

12.0 DOCUMENTS COMPRISING THE BID

Electronic Bids (e-bid) in two parts i.e. PART-I (Techno-commercial part) & PART-II (Priced part) as detailed below shall be submitted in e-tendering portal in accordance with the instructions and terms & conditions enclosed with the Bidding Document.

12.1.1 SUBMISSION OF PHYSICAL DOCUMENTS

Bid Security in Original (if applicable) shall be submitted as per the cutoff date mentioned in IFB/LIB/BDS.

12.1.2 PART - I - TECHNO-COMMERCIAL/ UNPRICED BID

(a) Scanned copy of Bid Security along with SFMS confirmation/"SWIFT message" as per Clause 19 of ITB (to be uploaded in "FEE FOLDER" in e-tendering portal).

(b) Scanned copy of certified BQC documents (Technical as well as Financial) (as per IFB), wherever applicable;

(c) Scanned copy of Integrity Pact duly signed on each page by authorized signatory, wherever applicable as enclosed in the Bidding Forms.

(d) Amendment /addendum (if any);

(e) Power of Attorney and/or Board Resolution in favour of authorised bid signatory

Note: All documents files of the bid shall be e signed and uploaded by using the digital signature issued in the name of person having valid POA at the time of bid submission.

(f) Copies of documents defining constitution or legal status, place of registration and principal place of business of the Company.(*Not required in case of Limited RFQs*)

Organization details

- In case of a proprietorship firm, the name and address of proprietor, and certified copy of Bank Account Details.
- In case bidder is a partnership firm, certified copy of the partnership deed.
- In case of company (whether private or public), certified copy of the `Certificate of Incorporation' together with certified copy of Memorandum/Articles of Association

(g) Agreed Terms & Conditions for Indigenous Bidder or Indian Sub-supplier of Foreign Bidder;

(h) Agreed Terms & Conditions for Foreign Bidder;

(i) Bank Mandate Form with cancelled cheque duly signed and stamped with the Banker's certification as per **Form-A**;

(j) Unpriced copy (without price) of Price Schedule duly indicating 'Q' for Quoted / 'NQ' for Not Quoted, in accordance with the instructions mentioned therein.;

(k) Compliance to requirement of PAN, tax residency certificate and form no.10*F* as per relevant form*s* provided in annexure to SPC (**applicable for foreign bidder** in case of services in India is rrequired as per scope of Bidding document);

(l) Signed and stamped copy of Form-IA/II, as applicable (on Company's Letterhead) attached with Annexure-II of ITB in line with Government guidelines regarding procurement from bidders from a country or countries sharing Land Border with India;

(m) any other document **required as per, Technical Specifications; and**

(n) any other document **required in the BDS**.

Note: The above shall be uploaded in "PREQUAL/ TECHNICAL" folder in e-tendering portal.

12.1.3 PART-II (Priced Bid)

(a) Price Schedule with prices filled in. The rates are to be filled in accordance with instructions provided in Preamble to Schedule of prices, in e-tendering portal, without making any changes in the format/names of the file/worksheet.

Deviations to terms and conditions, presumptions, overwriting etc shall not be stipulated in Price part of bid. In case of any conditions stipulated in price bids, the bids of such bidders shall be summarily rejected and shall not be considered for further evaluation. Evaluation shall be carried out excluding such bidder(s.)

Note:

a) Part-II shall be uploaded in "FINANCE" folder in e-tendering portal.

b) Bidder to note that if they submit prices in un-priced part of their bid, such prices shall not be considered. The prices as submitted in the price part only shall be considered for evaluation and ordering, if any. If prices are not found in the price part and even if mentioned elsewhere, the bid shall be rejected.

13.0 INTEGRITY PACT (applicability shall be as per IFB/LIB/RFQ)

PLL, as one of its endeavor to maintain and foster most ethical and corruption free business environment, have adopted the Integrity Pact to ensure that all activities and transactions between the Company (PLL) and its Counterparties (Bidders, Contractors, Vendors, Suppliers, Service Providers/Consultants etc.) are handled in a fair and transparent manner, completely free of corruption.

13.1 Bidder shall submit, the scanned copy of the Integrity Pact (**enclosed in the bidding document**) duly signed and stamped as a token of compliance in Part-I of the Bid, wherever required as per Bid Data Sheet. **Non-submission of Integrity pact in the bid shall be a ground of disqualification. However, in case of non-submission of Integrity Pact in the bid, an opportunity shall be given in the CQ to submit the Integrity Pact, provided bidder has declared Integrity Pact submission confirmation in their bid. Hence, only those bidders shall be given opportunity to submit IP who have confirmed to submit the same in their original bid.** Copy of the Integrity Pact is available in Bidding Document. Further, if the Integrity Pact submitted in the bid is carrying certain shortcomings / deviations, the bidder shall be asked to clarify or make simple corrections through CQs.

13.2 For details of Independent External Monitors (IEMs)appointed by PLL, refer the IFB/LIB (as applicable).

No deviations / modifications in IP shall be acceptable. Bidder shall submit the same format of signed integrity pact (as provided in the bidding document duly signed by the buyer), duly filled-in, signed & stamped by the authorized signatory of bidder.

Integrity Pact shall be signed by

a) authorized signatory of the bid, in case of Company

b) the Proprietor, in case of Proprietorship firm
c) at least two Partners, in case of Partnership firm

14.0 ALTERNATIVE OFFER / MULTIPLE BIDS

14.1 A bidder (i.e., the bidding entity) shall, on no account submit more than one bid either directly (as a single bidder or as a member of consortium) or indirectly (as a sub-contractor) failing which following actions shall be initiated:

(a) All bids submitted by such bidder (say 'A') as a single bidder or as a consortium, shall stand rejected and BID SECURITY, if any, in case of all such bids submitted by bidder 'A' shall be forfeited.

(b) If another bidder (say 'B') has proposed bidder 'A' as a sub-contractor then bidder 'B''s bid shall also be rejected. However, in case the bidder 'B' has also proposed an alternative sub-contractor who is other than the bidder 'A', then bidder 'B''s bid shall be evaluated with the proposed alternative sub-contractor only. Hence, every bidder shall ensure in his own interest that his proposed sub-contractor is not submitting alternative/ multiple bids.

Note: However, in case EIL has proposed a list of sub-contractors/ sub-vendors in the enquiry document itself which shall be common for all the Bidders, the provisions at (b) above shall not be applicable. It is further clarified that:

- A sub-Contractor can be common to more than one Bidder, provided the sub-Contractor themselves are neither a Bidder nor a consortium member.
- Where an Enquiry has multiple Parts, the above condition shall be applicable individually for each Part, as if it is a separate Enquiry.

15.0 BID PRICES AND DISCOUNTS

15.1 The prices must be quoted strictly in the format of Price Schedule/SoR/BoQ provided in the Bidding Document. Bidder shall not quote any discount separately for any item or on overall price. Conditional discount, if offered, shall not be considered for evaluation.

15.2 Unless stated otherwise in the Bidding Document, the Contract shall be for the total works as described in Bidding Document, based on the Schedule of Rates/ Price schedule submitted by the bidder and accepted by EIL.

15.3 Rates/ prices quoted by the bidder, shall remain firm, fixed and valid till the completion of the Works and will not be subject to variation on any account except as otherwise specifically stated in the Bidding Documents.

15.4 It shall be the responsibility of the Bidder to duly enquire of their own and comply with all applicable laws, rules, regulations, orders and formalities applicable to Goods and Services Tax (GST), Custom Duty etc. on the manufacture, sale and/or supply of any material / services to Owner / EIL. It is clearly understood that Owner/ EIL will not have any additional liability towards payment of applicable Taxes & Duties as a result of Bidder's wrong assessment / interpretation of applicable taxes & duties.

15.5 All duties, taxes, and other levies payable shall be as per Annexure-II of Special Purchase Conditions.

15.6 **The Bidder shall keep the Owner / EIL indemnified from and against any and all claims, demands, prosecutions, penalties, damages, demurrages and/or other levies whatsoever** made or levied by any Court, Tribunal or the Customs or other Authorities with respect to any alleged breach, evasion or infraction of such duties, taxes, charges or levies or any breach or infraction of such laws, rules, regulations, orders or formalities concerning the same and from the consequence thereof.

15.7 Foreign Exchange rate variation shall not be provided.

16.0 CURRENCIES OF BID AND PAYMENT

Currency of bid shall be as specified in Special Purchase Conditions. Payment shall be made in respective currency of quote only.

17.0 QUALIFICATION OF THE BIDDER

17.1 In case bidding document contains Bidder Qualification Criteria (BQC), Bids of only those bidders who are found to qualify based on the Qualification Criteria specified in the IFB/LIB shall be considered for detailed Techno-Commercial evaluation. Decision of EIL/PLL in this regard shall be final and binding.

18.0 PERIOD OF VALIDITY OF BIDS

18.1 Bids shall remain valid for the period specified in the **IFB/LIB/RFQ** after the bid submission deadline date prescribed by EIL in accordance with Clause 22.0 of ITB. A bid with shorter validity shall be rejected by EIL as non-responsive. Bidders shall not be entitled during the above period, without the consent of EIL in writing, to revoke or cancel their Bid or to vary the Bid given or any term thereof. In case of bidders revoking or cancelling their Bid or varying any terms in regard thereof without the consent of EIL/Owner in writing, EIL/Owner shall forfeit Bid security, submitted along with the bid and shall reject their bids. Such Bidder may also be put on Black list / Holiday list/ Negative List/Suspension/Banning List.

18.2 In exceptional circumstances, prior to the expiration of the bid validity period, EIL may request bidders to extend the period of validity of their bids. The request and the responses shall be made in writing. If a bid security is requested in accordance with Clause 19 of ITB, it shall also be extended for 30 days beyond the deadline of the extended bid validity period. A bidder may refuse the request without forfeiting its bid security. A bidder granting the request shall not be permitted to modify its bid.

19.0 BID SECURITY / EARNEST MONEY DESPOSIT [Refer IFB/LIB/RFQ for applicability]

19.1 Bids must be accompanied with Earnest Money Deposit / Bid Security in favour of “Petronet LNG Limited” payable at “New Delhi”. Bids not accompanied with requisite Earnest Money deposit /Bid Security (or valid Udyam Registration Certificate, wherever applicable) shall be considered as non-responsive and such Bids shall be summarily rejected.

19.2 Bidder shall furnish Bid Security, in original form, as part of its bid, in the amount and currency specified in the Enquiry. Any bid not accompanied with a requisite Bid security or the Bid Security not being for the required amount, shall be summarily rejected by EIL/Owner. Format of Bank Guarantee for Bid Security is provided in Bidding Forms.

19.3 Bidder shall be required to upload the scanned copy of original bid security (or documentary proof claiming exemption, wherever applicable) within the final extended bid due date and time on the e-tendering portal. If the Bidder fails to submit Bid Security physically in original or upload copy of the same on the e-tendering portal within the cut-off date as per the bidding document, his bid shall be rejected and not considered for further evaluation. Uploading as well as submitting original Bid Security within the cut-off date is mandatory.

19.4 Apart from hard copy submission of BGs, bank guarantee issued towards EMD/CPBG/ABG, etc, it shall be ensured that same is also routed through SFMS platform (Structured Financial Messaging System)/SWIFT message (from foreign bidders) for Bank Guarantee issuance and verification. The information/ messaging (as per SFMS platform) shall be sent by BG issuing bank branch to PLL's Banker. Failure to adhere to this requirement may render the bid liable for rejection.

19.5 Owner shall not pay any interest on Bid Security furnished. Further, in case bid security submitted is found to be fake, bid of such bidder shall be rejected and may initiate action as deemed necessary as per EIL /Owner Policy.

19.6 The bid security submitted by Indian bidder, shall be in the form of Bank guarantee, in favour of Petronet LNG Limited from any schedule Indian Bank or any branch of international bank situated in India and registered with RBI as schedule foreign bank.

19.7 In addition to above, Indian bidder can also submit the EMD through PLL Online EMD Tender Fee Collection portal (detailed procedure attached as Annexure-VI to ITB/LIB), the link for the same is mentioned in IFB/LIB. Bidders shall be required to submit/ upload the successful transaction details along with their bid/e-bid. In absence of submitting/ uploading the remittance details, the bid is likely to be considered as bid not accompanied with EMD.

Further, in case of the online transaction, submission of EMD in original is not applicable.

19.8 Foreign bidders shall submit unconditional Bank Guarantee from any schedule bank in India or from an international bank who has its Branch in India and registered with RBI as schedule foreign bank incorporated in India strictly in the format provided in Bidding Forms to be denominated in the currency of contract for the amount as applicable may be accepted.

BG issued by any foreign bank, which is not a scheduled bank in India shall be accepted provided that Bank Guarantee issued by such bank is counter guaranteed by any Schedule Bank incorporated in India.

19.9 Bank Guarantee shall be valid for One Month beyond the validity period of the bid, or beyond any period of extension if requested under Clause 18 of ITB. In case of extension in original bid validity by more than 15 Days, the Bid Security validity shall be extended accordingly.

19.10 Exemption from submission of Earnest Money Deposit shall be as indicated below:

a) In case of Micro and Small Enterprise, only Udyam Registration certificate shall be considered for availing the benefit of EMD exemption. Irrespective of the product

category, exemption from payment of EMD shall be given to all eligible MSEs, except for Traders and in Works contracts.

b) If the MSE bidder does not provide Udyam Registration Certificate or bid security/EMD along with the e-bid to substantiate their MSE status, such offer of such MSE bidder shall be rejected.

In case an MSE bidder has submitted Udyam Registration No. but scanned document is not uploaded along with Bid on e-tendering portal, the same can be accepted provided a valid MSE Certification is available on Government Udyam Registration portal.

c) The Udyam Registration Certificate shall be verified from GoI Udyam registration portal (Present web address is https://udyamregistration.gov.in/Udyam_Verify.aspx). The status of MSE Bidder as on date of Unpriced Bid Opening shall be considered for EMD exemption benefit.

19.11 Return of bid security:

a) EMD of late bids/ where unpriced bids not opened, shall be returned after Unpriced bid opening.

b) EMD of Bidders whose price bids are not opened shall be returned after Price Bid opening.

c) EMD/ Bid securities of unsuccessful bidders will be returned upon placement of order/ award.

d) In case of the successful Bidder, the same will be returned after the order/ contract is effective and Contract Performance Bank Guarantee is submitted.

e) However, in case EIL/Owner decides to cancel / annul the Enquiry / bidding document at any stage during the bidding process but before the award of work/ items (as applicable), EMD of the bidders shall be returned at the earliest from the date of such decision.

19.12 The bid security shall be forfeited:

(a) If the offer is withdrawn within the Bid validity.

(b) If the bid is altered/ modified within its Bid validity

(c) If the bidder does not accept the LOA issued within the Bid validity.

(d) If the bid is accepted by Petronet LNG Limited and work awarded but the contractor does not furnish Contract Performance Security.

(e) If the bidder submits the forged document and is indulged in the fraudulent practice the EMD shall be enchased, further the bidder should be put on holiday after following the due process.

Note: In case of forfeiture of EMD/ Bid Security, the forfeited amount will be considered inclusive of tax and tax invoice (if applicable) will be issued by PLL. The forfeiture amount will be subject to final decision of PLL based on other terms and conditions of order/ contract.

20.0 FORMAT AND SIGNING OF BID

20.1 Bids shall be signed by the authorized signatory of the bidder.

20.2 Bidder shall submit a Power of Attorney in favour of authorized bid signatory(ies) and Digital signatory . Requirements for submitting the Power of Attorney (POA) shall be as follows:

i) Company:

- Bidder shall submit a specific Power of Attorney for the enquiry in the name of authorized person. OR
- In case Bid signatory has General Power of Attorney or has the power as per their Board resolution, the same shall be submitted duly certified by Notary Public or CEO/CFO/Company Secretary (CS)/Member of Board of Directors. OR
- In case, Bid is signed by CEO/CFO/CS/any member of board of Directors, no separate POA is required, provided the documentary evidence of their being CEO/CFO/CS/any member of board of Directors is reflected in the MOA/AOA/Financial Statements, else submitted separately in the Bid.

ii) Partnership Firm: In such case,

- Bid can be signed by all the partners of the Firm and in such case no separate POA is required. OR
- Bid can be signed by any of the Partner(s) holding Power of Attorney as specified in the Partnership Deed, OR
- Bid can be signed by an authorized person and shall submit a specific POA for the Enquiry duly signed by all the Partners.

Bidder shall submit the copy of Partnership Deed.

iii) Limited Liability Partnership (LLP) Entity:Bid shall be signed by the person

- holding Power of Attorney as per the registered LLP Agreement for the Firm, OR
- has the power as per their Board resolution, OR,
- having a specific POA for the Enquiry duly signed by all the LLP Partners.

Bidder shall submit (i) a copy of LLP Agreement, and (ii) a copy of Certificate of Incorporation.

iv) Proprietorship: Proprietor shall sign the Bid. Bidder shall also submit a copy of (i) PAN card and (ii) Bank Mandate Form, duly certified by the Bidder's Banker.

v) For Indian Bidder, POA shall be on non-judicial stamp paper of minimum value of INR 100/- and duly Notarized by a Notary Public in India.

For Foreign Bidders, POA shall be:

- on the Stamp Paper of appropriate value or engraving/embossing, in lieu of nonjudicial stamp paper, as per applicable laws in Bidder's Country; or

- as per any other system prevailing in the bidder's country for the purpose of issuing POA.

vi) Specific POA issued for the Enquiry shall confirm that the authorized signatory have been authorized to do in the name and on behalf of the Company/Firm all or any of the acts, deeds or things necessary in connection with or incidental to the Bid submitted by the bidder for the subject Enquiry Document, including but not limited to the signing and submission of bid, participating in the meetings, responding to queries, submission of information / documents and generally to represent us in all the dealings with EIL/Owner or any person, in connection with the works, without any prejudice, limitations and exceptions till the completion of the bidding process.

20.3 Bidders to upload the Un-price and Price part of their e-bids strictly in the Un-price & Priced folders respectively at the designated place in the e-tendering portal. Non-Compliance to the same may lead to rejection of their Bids.

20.4 DIGITAL SIGNATORY:

i) The e-bid shall be digitally signed (e-signed) using the digital signature of a person duly authorized to sign on behalf of the bidder. The digital signature used for signing the bid shall be issued in the name of such authorized person and the certificate details, available from the signed documents, should indicate the details of the signatories. Any consequences resulting due to such signing (e-signing) shall be binding on the bidder.

ii) In case foreign bidder does not have digital signature issued by an Indian certifying authority, he can authorize his Indian representative to use the representative's digital signature to upload the bid on behalf of foreign bidder. In such a case, the authorization letter from foreign bidder to his Indian representative shall be submitted along with the bid.

iii) All documents as submitted in the e-Procurement Portal using digital signature at any time during the Bidding process shall be deemed considered signed by the authorized signatory only, irrespective of authorized signatory's signature on all pages or not.

D SUBMISSION AND OPENING OF BIDS

21.0 SEALING AND MARKING OF BIDS

21.1 The bidder shall submit the, original Bid Security along with other documents requested in "Original", as per the requirement of relevant clause of ITB, in separate sealed envelopes, duly marking the envelopes as per following:

Part III -Original Bid Security
Name of Work : _____
Bidding Document No. : _____
Due date & Time of Submission : _____
From : _____ [Name & Address of Bidder]

21.2 The envelope shall bear the name and address of the bidder and bear a warning not to open before the time and date for bid opening.

21.3 If all envelopes are not sealed and marked as required, EIL will assume no responsibility for the misplacement or premature opening of the EMD.

21.4 Bidders shall submit bids (**Part-I & Part-II**) electronically and shall follow the electronic bid submission procedures **enclosed as Annexure-I to this ITB.**

22.0 DEADLINE FOR SUBMISSION OF BIDS

22.1 Bidders shall submit their bids electronically in the e-tendering portal, within the date and time **specified in the RFQ/IFB or any extensions thereof**. Bidders submitting bids electronically shall follow the electronic bid submission procedures **enclosed as Annexure-I to this ITB**.

No Physical bid shall be permitted other than submission of the documents categorically asked for in hard copies as part of e-bids submitted online through the e-tendering Portal. The bids submitted online through e-tendering Portal shall only be considered for evaluation and ordering. The e-bid must be complete in all respects, leaving no scope for ambiguity. Bidder shall be fully responsible for the bid submitted in e-tendering portal and no relief or consideration can be given for errors and omissions.

22.2 Bid Security in accordance with ITB 19 in original, must be received by EIL at the address and no later than the date and time for submission of Bids **specified in the RFQ/IFB.**

22.3 EIL/Owner may, at its discretion, extend the deadline for the submission of bids by amending the Bidding Documents in accordance with Clause 7.0 of ITB, in which case all rights and obligations of EIL/Owner and bidders previously subject to the deadline shall thereafter be subject to the deadline as extended.

22.4 Bidder should avoid the last hour rush to the website wherein bidder is likely to miss the deadline for bid submission. Due date extension request due to above reason shall not be entertained.

23.0 LATE BIDS

23.1 E-tendering system shall close immediately after the deadline for submission of bid. Any bids being submitted in physical form (other than EMD) shall not be considered for opening / evaluation / award and will be returned to such bidders.

23.2 In the event the Bid Security in original, in accordance with ITB 12.1.1, are not submitted within the deadline for submission of bid security, the bids shall be declared late and shall not be considered for further evaluation, notwithstanding the fact that the bid security has been submitted in electronic form within the deadline.

23.3 Unsolicited bids or bids being submitted to place/website other than one specifically stipulated in the RFQ documents shall not be considered for opening/evaluation/award.

24.0 WITHDRAWAL, SUBSTITUTION, AND MODIFICATION OF BIDS

24.1 The bidder may modify, re-submit or withdraw its e-bid after the bid submission, but, before the due date and time for submission of Bid following the electronic bid submission procedures**.**

24.1 There are two specific features in NIC- Central Public Procurement Portal (CPPP) viz, “Withdraw” and “Re-Submission”. Bidders should not use the feature “withdraw” unless they have decided to withdraw their bids. It is to be noted that once “withdraw” feature is used they will not be allowed to re-submit their bid against this Bidding Document. In case a Bidder desires to change his bid for any reason before bid due date, Bidder shall use “Re-Submission” feature.

24.2 No bid shall be withdrawn, substituted, or modified in the interval between the deadline for submission of bids and the expiration of the period of bid validity or any extension thereof.

24.3 In case bidder fails to accept the order or withdraw the bid after bid submission, punitive action shall be taken against them as per the EIL/PLL Policy.

25.0 BID OPENING

25.1 EIL shall open bids received in the e-tendering portal except bidders who are on Holiday/ Suspension / Banning list of EIL / PLL.

25.2 EIL shall verify the availability of scanned copy of Bid security is uploaded in Part-I of e-bid during un-priced bid opening.

25.3 Except in the cases specified in ITB 23.2, EIL shall open Part-I of all bids received in the e-tendering portal.

25.4 The order of part wise opening of bids shall be as follows;

(i) On scheduled date and time of UNPRICED bid opening,

(a) Scanned Copy of Original Bid Security submitted in e-bid shall be opened first and verified that whether Bid Security has been furnished as per bid requirement.

(b) Upon meeting the requirement of Bid Security as per Clause (a) above, Opening of documents of Part–I, submitted in electronic form shall be processed on the e-Procurement module of the e-tendering portal.

(c) If a bidder has not complied with Bid Security requirement a) above, such bidder’s offer shall be rejected out rightly.

(ii) Part-II of bid of only those bidders whose bids is determined to be technically and commercially acceptable by EIL shall be opened. Bidders selected for opening of their priced bids shall be informed about the date, time and place of price bid openingand shall not be called for physical participation during bid opening.

25.5 In case the enquiry is issued on Composite Bidding i.e. single stage single bid basis, (as per RFQ/BDS), unpriced and priced bid shall be opened together in single stage.

E EVALUATION AND COMPARISON OF BIDS

26.0 CONFIDENTIALITY AND COMMUNICATION PROTOCOL

26.1 A bidder may seek clarification regarding the bidding document provisions, bidding process and / or rejection of his bid. EIL shall respond to such requests within a reasonable time. However, such information relating to the evaluation of bids and recommendation of

contract award shall not be disclosed to any other persons not officially concerned with the bidding process.

26.2 Any attempt by a bidder to influence EIL in the evaluation of the bids or Contract award decisions shall render their Bid liable for rejection.

26.3 Notwithstanding Clause 26.2 of ITB, from the time of bid opening to the time of Contract award, if a bidder wishes to contact EIL on any matter related to the bidding process, it shall done so in writing only.

26.4 Bidder shall strictly follow the communication protocol as prescribed in BDS/RFQ. In case the queries are not addressed to the persons specified in the communication protocol stipulated in the BDS/RFQ, EIL may not give any cognizance to the same and EIL shall not be liable to reply them.

26.5 Only a bidder who has participated in the concerned procurement process i.e. prequalification or bidding, as the case may be, can make such representation in respect of the procurement process in which they have participated.

In case pre-qualification bid has been evaluated before the bidding of Technical/ financial bids, an application for review in relation to the technical/ financial bid may be filled only by a bidder who has qualified in pre-qualification bid.
In case Priced bids are opened subsequent to qualification/ acceptance of bidders post evaluation of unpriced bids, an application for review in relation to the price bid may be filed only by a bidder whose unpriced bid is found to be acceptable.
Any representation pertaining to Award stage by a bidder whose price bid is opened and is directly affected by such award shall have to submit such representation within 10 days of the issue of LOA.

26.6 Following decisions of the EIL/PLL shall not be subject to review

i) Determination of the need for procurement;
ii) Selection of the mode of procurement or bidding system;
iii) Choice of selection procedure;
iv) Provisions limiting participation of bidders in the procurement process;
v) The decision to enter into negotiations with the L1 bidder;
vi) Cancellation of the procurement process except where it is intended to subsequently re-tender the same requirements
vii) Issues related to ambiguity in contract terms after award of contract.
viii) Complaints against specifications except under the premise that they are either vague or too specific so as to limit competition may be permissible.

27.0 DEVIATIONS, RESERVATIONS, AND OMISSIONS

27.1 During the evaluation of bids, the following definitions apply:

(a) “Deviation” is a departure from the requirements specified in the Bidding Documents;

(b) “Reservation” is the setting of limiting conditions or withholding from complete acceptance of the requirements specified in the Bidding Documents; and

(c) “Omission” is the failure to submit part or all of the information or documentation required in the Bidding Documents.

28.0 DETERMINATION OF RESPONSIVENESS

28.1 EIL/Owner's determination of a bid's responsiveness is to be based on the contents of the bid itself, as defined in Clause 12.0 of ITB.

28.2 Bids/ offers/ tenders that do not meet the basic requirements specified in the Bidding Document shall be treated as unresponsive and ignored. All tenders received will first be scrutinised to see whether the tenders meet the basic requirements as per the Bidding Document and to identify unresponsive tenders, if any. Unresponsive offers may not subsequently be made responsive by correction or withdrawal of the non-conforming stipulation. Points on the basis of which a tender may be declared as unresponsive and be ignored during the initial scrutiny are:

i. Bidder is debarred or on holiday or suspension as per the terms specified in the Bidding Document.
ii. In case contract/ Purchase order awarded for the tendered work have to be terminated due to Contractor's/ supplier's default and a separate enquiry / tender have to be floated to get the remaining/ complete work executed, such defaulting Contractor/ supplier will not be considered for enquiries/ tenders issued for the refloated work/ enquiry.
iii. The required EMD and Bid document fee (as applicable) has not been provided or exemption from EMD is claimed without acceptable proof of exemption;
iv. In case bidder declares in the bid that they are under liquidation, court receivership or similar proceedings.
v. Offer received from bidders to whom enquiry has not been issued in case of limited enquiry shall not be considered.
vi. Bidder declares of labour strike or lock-out during the course of evaluation or if it comes to notice of EIL.

After examination of preliminary responsiveness as above, the bids determined as responsive shall be considered for further evaluation and shall be evaluated in detail to examine for any shortfall of information/documents and necessary clarifications may be sought at the sole decision of EIL/PLL.

28.3 In addition to above, in case tender is issued on other than 'Zero Deviation' basis, following provision shall also apply:

A substantially responsive bid is one that meets the requirements of the Bidding Documents without material deviation, reservation, or omission. A material deviation, reservation, or omission is one that,

(a) if accepted, would:

(i) affect in any substantial way the scope, quality, or performance of the Works specified in the Contract; or

(ii) limit in any substantial way, inconsistent with the Bidding Documents, EIL's rights or the bidder's obligations under the proposed Contract; or

(b) if rectified,

(i) would unfairly affect the competitive position of other bidders presenting substantially responsive bids.

28.4 Bidder shall not be allowed to submit any Price Implication or Revised Price after submission of e-Bid. In case Exceptions and Deviations submitted by Bidder along with Bid are not considered acceptable and no Amendment is issued incorporating such changes, then in such a case the Bidders would be required to withdraw such Exceptions/Deviations unconditionally in favour of stipulations of the RFQ document without any price implication, failing which such Bid(s) shall be considered as non-responsive and liable for rejection.

29.0 CLARIFICATION OF BIDS

29.1 Bidders should ensure that the Bid submitted is substantially responsive Bid in the first instance itself. Evaluation may be completed based on the content of the Bid itself without seeking any subsequent additional information which may result in rejection of Bid. However, EIL may, at its discretion, may request bidder to submit the necessary information or documentation, within a reasonable period of time, to withdraw material deviation, reservation, or rectify omission in the bid related to documentation requirements. Requesting information or documentation on such account shall not be related to any aspect of the price of the Bid(forming part of evaluation). EIL's request for clarification and the response shall be in writing.

29.2 No change, including any voluntary increase or decrease, in the prices or substance of the bid shall be sought, offered, or permitted. Bidder shall not be allowed to submit any price implication or revised price after submission of Bid unless the same is called for by EIL in writing.

29.3 Any clarification submitted by a bidder that is not in response to a request by EIL shall not be considered. Failure of the bidder to comply with the request may result in the rejection of its Bid.

29.4 If a bidder does not provide clarifications of its bid by the date and time set in EIL's request for clarification, its bid shall be evaluated with available information which may result in rejection of their bid.

30.0 EVALUATION OF TECHNO-COMMERCIAL BIDS

30.1 Prior to price opening of bids, EIL will determine whether each bid is

(i) accompanied with required Bid Security as applicable;

(ii) Fulfils the technical, financial, experience and other requirements as specified in the Bidding Document;

(iii) Bid's responsiveness, in accordance with Clause 27.0 of ITB;

(iv) Authentication of qualification documents (for open competitive bids only);

(v) Any other relevant factor, if any that EIL deems necessary or prudent to be taken into consideration.

30.2 For assessment of submission(s) made by bidder towards their qualification /acceptance, PLL/EIL reserves the right to use in-house information and their performance on jobs completed/ in progress for evaluation purpose.

30.3 Any unsolicited reduction in price offered by a bidder within the bid validity by way of discount or revised prices, subsequent to the bid due date, shall not be taken into account

for comparison. However, such reduction in price shall be taken into account for ordering if such bidder happens to be recommended as per the originally quoted prices.

30.4 In view of the enquiries being issued on zero deviation basis, Technical or commercial queries shall not be raised. However, EIL reserves the right to raise queries in exception situations. CQ/ TQs, if any, shall be issued through E-tendering portal and Bidder shall submit their replies through E-tendering portal only. Accordingly, CQ/ TQ replies through any other mode (e-mail, physical form) shall not be accepted. Offers shall be evaluated based on the information available upto cut-off date for CQ/ TQ replies. Bidder shall not submit any Price against TQ/ CQ raised unless specifically sought in writing.

30.5 In view of zero deviation bidding, in case of MRs (group/ basket/ block/ itemwise) / Lumpsum Enquiry, during unpriced evaluation if a bidder has not quoted any part/component/ freight etc, the bid of such a bidder for the corresponding group/ basket/ block/ item (or the entire MR/ lumpsum Enquiry, in case there is only one group/ block) shall stand rejected. However, EIL reserve the right to ask the bidder to absorb the same (except in case of an item not being quoted in an item wise MR). Non-compliance shall result in rejection of corresponding item/group/block.

It is clarified here that for grouped/ basket/ block, if any item not quoted, the offer shall be rejected for that group/ basket/ block without any CQ/ TQ.

In case, the above is discovered post priced bid opening, such bidder's bid shall not be considered for evaluation for the corresponding group/ block or entire MR/ tender, if there is only one single group/ block. In such an event, the lowest bidder shall be determined out of the remaining bidders.

31.0 OPENING OF PRICE BID

31.1 Priced Bid (Part-II) of only those bidders whose bids is determined to be technically and commercially acceptable by EIL/Owner shall be opened. Bidders selected for opening of their priced bids shall be informed about the date, time and place of price bid opening and shall not be called for physical participation during bid opening.

31.2 In case of enquiries having more than one group/block/basket, the Price Bids of Qualified bidders whose bids are determined to be technically and commercially acceptable for the respective group/block/basket shall only be considered for Price Opening / Evaluation.

32.0 CORRECTION OF ARITHMETICAL ERRORS

The prices quoted by bidders shall be checked for arithmetic correction, if any, based on rate and amount filled by the bidder in the SOR/price schedule/BoQ formats. Based on the format of price schedule/SOR, suitable provisions shall be incorporated in enquiry document as follows:

32.1 RATE AND AMOUNT IN FIGURES AND WORDS

a) When there is a discrepancy between the rate in figures and in words for an item, the rate which corresponds to the amount shall be taken as correct.

b) When the rate quoted by the bidder in figures and words tallies but the amount is incorrect, the rate quoted by the tenderer shall be taken as correct.

c) When it is not possible to ascertain the correct rate as detailed above, the rate quoted for the item in words shall be adopted as the quoted rate. If there is an error in total corresponding to the sub-totals, the totals shall prevail and sub-totals shall be corrected;

32.2 RATE AND AMOUNT IN FIGURES ONLY

When rate and amount are in figures only, in case of discrepancy, the rate quoted by bidder shall be taken as correct.

32.3 LUMPSUM AMOUNT ONLY IN FIGURES AND WORDS

When a lumpsum amount is quoted in figure and words but no unit rates are not required to be quoted, amount quoted in words shall be taken as correct.

In case of any discrepancy, Bidders shall be requested to accept correction of arithmetical errors. Failure to accept the correction in accordance with Clause 32.1 of ITB, shall result in the rejection of the Bid and Bid Security shall be forfeited. the same shall be treated as withdrawal of bid and dealt as per the Prevailing Policy and provision of tender document

33.0 CONVERSION TO SINGLE CURRENCY

33.1 In global enquiries, for evaluation and comparison purposes, the foreign currency of the Bid shall be converted into a single currency (i.e. INR), and that will be:

Equivalent Rupees at the Bill selling exchange rate published by the State Bank of India, New Delhi (SBI Card rate for above 10 Lakhs) on one day prior to date of price bid opening shall be considered. In case exchange rate as on one day prior to date of priced bid opening is not available, the latest exchange rate available prior to one day before to date of priced bid opening shall be considered.

34.0 EVALUATION AND COMPARISON OF PRICE BIDS

34.1 EIL shall compare the price bids based on the award methodology and loading criteria, if any, provided in **IFB/LIB/BDS** to determine the lowest evaluated bid.

34.2 When price implication is not specifically sought in writing from the bidder and the bidder on his own in response to CQ/TQ or any other reason submits the price implication, the same shall be treated as unsolicited price implication.

34.3 Any unsolicited reduction in price offered by a bidder within the bid validity by way of discount or revised prices, subsequent to the bid due date, shall not be taken into account for comparison. However, such reduction in price shall be taken into account for ordering if such bidder happens to be recommended as per the originally quoted prices.

34.4 In the event of any unsolicited price increase sought by any bidder, subsequent to the bid due date, the bid of such a bidder shall be rejected, in case the bidder does not agree to withdraw the price increase. In case, price increase is sought by the L1 bidder after priced bid opening and the bidder does not agree to withdraw the price increase, the order shall not be placed with price increase and the enquiry shall be refloated. Wherever, decision is taken to reject a bid, EMD, if submitted, by the Bidder, shall also be forfeited and appropriate action shall be taken as per applicable policy / procedure of EIL.

34.5 Any implication on account of wrong quotation of taxes and duties shall be to Bidder's account. However, the payment towards such taxes and duties quoted by the bidder shall be restricted to lower of taxes and duties quoted by the bidder or the documentary evidence provided by the bidder.

35.0 OWNER/EIL'S RIGHT TO ACCEPT ANY BID, AND TO REJECT ANY OR ALL BIDS

35.1 The PLL/EIL reserves the right to accept or reject any bid, and to annul the bidding process and reject all bids at any time prior to award of the order without thereby incurring any liability to the affected bidder or bidders or any obligations to inform the affected bidder or bidders on the ground of such action by EIL.

36.0 DELETED

F AWARD OF CONTRACT

37.0 AWARD CRITERIA

37.1 Subject to Clause 34.1of ITB, the EIL / Owner shall award the Contract to the bidder who has been determined to be the lowest evaluated bid. However, if in the opinion of Owner, the total price or certain item rates quoted by the lowest evaluated bidder are considered high, Owner may invite such bidder for price negotiation. Lowest quoted bidder shall attend such negotiation meetings and if requested by Owner shall provide the analysis of rates/break-up of amount quoted by him for any or all items of Schedule of Rates/ Prices to demonstrate the reasonability. As a result of negotiation, bidder may offer rebate on his earlier quoted Price.

37.2 In an extreme situation, when there is a 'TIE' based on the evaluated price (after loadings, if any), recourse shall be taken on the basis of Bidder's maximum annual turnover during the last 3 years. For this purpose, annual turnover of the bidders having tie, shall be tabulated for the past 3 years and maximum annual turnover in any of the last 3 years shall be determined for each bidder. The Bidder whose maximum turnover is highest shall be the recommended Bidder.

38.0 REVERSE AUCTION

38.1 Owner/EIL reserve the right to conduct reverse auction among the technically and commercially acceptable bidders. The decision, if any, to conduct reverse auction, will be conveyed to short listed bidders prior to opening of price bid. In case of more than three techno commercially qualified Bidders against the subject tender, the bidder with highest bid received in Price Bid (BoQ) against the Tender shall not be eligible to participate in the Reverse Auction process and his bid will be rejected. Two Stage process shall be followed for Reverse Auction wherein after the Price Bid opening, the Reverse Auction shall be separately scheduled on portal.

The terms & conditions applicable for reverse auctioning shall be as per Annexure-IV to this ITB. However, the % reduction of evaluated price in the Reverse Auction w.r.t. the evaluated price based on price quoted by the bidder in e-bid shall be considered as a uniform discount applicable on all the items of SOR.

39.0 DELETED

40.0 SITUATIONS IN WHICH THE AWARD CAN BE RESORTED TO L2 BIDDER

i) Under insolvency or Bankruptcy Bidders shall submit declaration on proceedings under Insolvency and Bankruptcy Code, 2016. Offer will not be considered of bidder(s) in the following cases:

(a) If the bidder is undergoing insolvency resolution process or liquidation or bankruptcy proceedings under Insolvency and Bankruptcy Code, 2016 (Code) or any other applicable law (in cases where code is not applicable).

(b) Insolvency resolution process or liquidation or bankruptcy proceeding is initiated under the Code or any other applicable law (in cases where code is not applicable) against/ by the bidder at any stage of evaluation of the bid.

In case where the bid of the L-1 bidder is rejected on the aforesaid grounds during the period between Price-Bid-Opening and Award of Contract, the bid of the next higher eligible bidder may be considered for further processing subject to matching of L1 bidder's prices.

ii) Treatment of Holiday listed L-1 Bidder: If after opening of price bids, it has come to the notice that the L-1 bidder has already been put on holiday list due to any reason whatsoever at any location within PLL/EIL, the party will not be considered for issue of order, the bid of the next higher eligible bidder may be considered for further processing subject to matching of L1 bidder's prices.

41.0 NOTIFICATION OF AWARD

41.1 Prior to the exp*i*ration of the period of bid validity, the Owner shall notify the successful bidder, in writing, that its bid has been accepted. The notification letter (hereinafter called the "**Letter of Award (LOA) / PURCHASE ORDER (PO)**"shall specify the sum that the Owner will pay the Supplier in consideration of the execution and completion of the Supply/Works.

41.2 Copies of LOA / PO shall be submitted back by Supplier duly signed and stamped as a token of their acknowledgement.

42.0 CONTRACT PERFORMANCE BANK GUARANTEE

42.1 Within thirty (30) days of the receipt of notification of award, the successful bidder shall comply with the requirement of Contract Performance Bank Guarantee.

42.2 Failure of the successful bidder to submit the above-mentioned Contract Performance Bank Guarantee or sign the Contract shall constitute sufficient grounds for the annulment of the award and forfeiture of the bid security.

43.0 Deleted

44.0 PROCUREMENT FROM A BIDDER FROM A COUNTRY SHARING LAND BORDER WITH INDIA

Department of expenditure vide OM no. 7/10/2021-PPD (1) DATED 23.02.2023 has issued the Revised Guidelines for Restriction on Procurement from Bidders from Countries sharing Border with India.

In view of the above order, following guidelines are issued for compliance:

a) Any bidder from a country which shares a land border with India will be eligible to bid in any procurement whether of goods, services (including consultancy services & non-consultancy services) or works (including turnkey projects) only if the bidder is registered with the Competent Authority specified in Annexure-I of the DoE OM dated 23.07.2020 {Public Procurement No.1}.

b) These orders will not be applicable to the bidders from those countries (even if sharing a land border with India) to which the Government of India has extended lines of credit or in which the Government of India is engaged in development projects.

c) Updated lists of countries to which lines of credit have been extended or List of countries in which development grant projects are undertaken are given on the website of Ministry of External Affairs.

d) Bidder shall refer to the enclosed **Annexure-II of ITB.**

Bidders shall submit a certificate of compliance in the enclosed Form I A / II of Annexure-II of ITB.

45.0 NON-APPLICABILITY OF ARBITRATION CLAUSE IN CASE OF BANNING OF VENDORS/SUPPLIERS/CONTRACTORS/BIDDERS/CONSULTANTS INDULGED IN FRADULENT/COERCIVE PRACTICES

Arbitration clause will not be applicable in case of banning of Vendors/suppliers/contractors/bidders/consultants indulged in fraudulent/ coercive practices. Accordingly, the following provision shall be applicable:

“Notwithstanding anything contained contrary in GCC and other sections of Bidding Document, in case it is found that the Vendors/ Suppliers/ Contractors/ Bidders/ Consultants indulged in fraudulent/ coercive practices at the time of bidding, during execution of the contract etc., and/or on other grounds as mentioned in PLL’s “Procedure”, the contractor/bidder/vendor/supplier /consultant shall be banned (in terms of aforesaid procedure) from the date of issuance of such order by PLL., to such Vendors/ Suppliers/ Contractors/ Bidders/ Consultants and PLL has the right to take appropriate legal remedy available to it under the applicable laws. Such disputes shall be governed by the jurisdiction clause of the contract.

46.0 PROCEDURE FOR ACTION IN CASE CORRUPT/ FRAUDULENT/COLLUSIVE/ COERCIVE PRACTICES

Procedure for action in case Corrupt/ Fraudulent/Collusive/Coercive Practices is enclosed with General Conditions of Contract. Further, EIL may also initiate suitable actions against above and procedure for the same is available in EIL website.

47.0 COMPLIANCE OF PLL INSIDER'S TRADING:

By virtue of association / engagement with Petronet LNG Limited (PLL), it is likely that certain Unpublished Price Sensitive Information (UPSI) as defined under "Code for Prevention of Insider Trading in the Securities of PLL" (hereinafter called Code), copy of which is hosted on the website of the company www.petronetlng.in, that is not generally available and which upon becoming generally available is likely to materially affect the price of the securities issued by PLL, might be shared with you / your organization. It is hereby cautioned that you or any of your team members or immediate relatives thereof or your organization, should not trade in the securities of PLL while in possession of such UPSI or communicate such UPSI to any person except in furtherance of legitimate purposes (as defined in the Code), performance of duty or discharge of legal obligations. Any trades in securities of PLL, directly or indirectly, while in possession of any UPSI would be presumed to have been motivated by the knowledge and awareness of the UPSI and the onus to prove that trades were executed otherwise would be on you or any of your team members or your organization as the case may be. It is therefore advised that all concerned as stated above must familiarize himself/themselves with the "Code for Prevention of Insider Trading in the Securities of PLL", copy of which is hosted on the website of the company.

Accordingly, it must be ensured that any UPSI, whenever received from the company:

(a) shall be used solely for the purpose for which it is being disclosed;
(b) shall be preserved and the secrecy of such information shall be maintained;
(c) shall not be disclosed to any third party;
(d) shall be kept securely and properly protected against theft, damage, loss and unauthorized access (including access by electronic means) by deploying means similar to those being used to secure its own confidential information;
(e) to notify PLL immediately upon becoming aware that any of the confidential information has been disclosed to or obtained by a third party.

It may be noted that any violation in dealing with UPSI shall be considered as breach of terms of engagement / Contract and PLL shall take necessary action for such breach in addition to reporting to SEBI for taking necessary action under SEBI (Prohibition of Insider Trading) Regulations, 2015 or subsequent amendments thereof. Further, SEBI may take any action including levy of penalty etc. as per SEBI Regulations in this regard in case of any violation in dealing with UPSI at your end.

48.0 UNIQUE DOCUMENT IDENTIFICATION NUMBER

The Institute of Chartered Accountant of India at its 379th council meeting dated 17-18th December, 2018 made generation of Unique Document Identification Number (UDIN) mandatory for every signature of full time practicing chartered accountant in phased manner for following services:

a) All certificates with effect from 1st February, 2019.

b) GST and Income Tax Audit with effect from 1st April, 2019.

c) All Audit and Assurance Functions with effect from 1st July, 2019.

In view of the above, bidder shall ensure that any certificate/ reports issued/ attested by an practicing chartered accountant in India and submitted in the bid shall mandatorily include the UDIN number. Certificate / reports issued/ attested without UDIN number of practicing chartered accountant in India shall not be considered for evaluation. The requirement of including UDIN shall not be applicable for certificate/ reports issued/ attested by a chartered accountant practising in Foreign Country.

49.0 TRADE RECEIVABLE DISCOUNTING SYSTEM (TReDS)

Government of India (GoI) introduced a scheme for setting up and operating the institutional mechanism for facilitating the financing of trade receivables of MSMEs from corporate buyers through multiple financiers known as Trade Receivables Discounting System (TReDS). This enables MSMEs to maintain the level of their Working Capital and process more and more corporate orders with minimum lead time.

Annexure – I to ITB

E-TENDERING METHODOLOGY

Instructions for Online Bid Submission:

The bidders are required to submit soft copies of their bids electronically on the CPP Portal (URL: http://eprocure.gov.in) only, using valid Digital Signature Certificates. The instructions given below are meant to assist the bidders in registering on the CPP Portal, prepare their bids in accordance with the requirements and submitting their bids online on the CPP Portal.

More detailed information useful for submitting online bids on the CPP Portal may be obtained at:

http://eprocure.gov.in/eprocure/app .

REGISTRATION

1) Bidders are required to enroll on the e-Procurement module of the Central Public Procurement Portal (URL: http://eprocure.gov.in/eprocure/app) by clicking on the link "Click **here to Enroll**" on the CPP Portal is free of charge.

2) As part of the enrolment process, the bidders will be required to choose a unique username and assign a password for their accounts.

3) Bidders are advised to register their valid email address and mobile numbers as part of the registration process and submit in EIL tender portal for updation of records (http://tenders.eil.co.in) . These details would be used for any communication from the CPP Portal.

4) Upon enrolment, the bidders will be required to register their valid Digital Signature Certificate (DSC) (Class II or Class III Certificates with signing key usage) issued by any Certifying Authority recognized by CCA India (e.g. Sify / TCS / nCode / eMudhra etc.), with their profile.

5) Foreign Bidders have to refer "DSC details for foreign Bidders" for Digital signature Certificates requirements which comes under Download Tab at http://eprocure.gov.in/eprocure/app and the remaining part is same as above and below.

6) Only one valid DSC should be registered by a bidder. Please note that the bidders are responsible to ensure that they do not lend their DSC's to others which may lead to misuse.

7) Bidder then logs in to the site through the secured log-in by entering their user ID / password and the password of the DSC / e-Token.

SEARCHING FOR TENDER DOCUMENTS

1) There are various search options built in the CPP Portal, to facilitate bidders to search active tenders by several parameters. These parameters could include Tender ID, organization name, location, date, value, etc. There is also an option of advanced search for tenders, wherein the bidders may combine a number of search parameters such as organization name, form of contract, location, date, other keywords etc. to search for a tender published on the CPP Portal.

2) Once the bidders have selected the tenders they are interested in, the same can be moved to the respective 'My Tenders' folder. This would enable the CPP Portal to intimate the bidders through SMS / e-mail in case there is any corrigendum issued to the tender document.

Copyrights EIL – All rights reserved

3) The bidder should make a note of the unique Tender ID assigned to each tender, in case they want to obtain any clarification / help from the Helpdesk.

PREPARATION OF BIDS

1) Bidder should take into account any corrigendum published on the tender document before submitting their bids.

2) Please go through the tender advertisement and the tender document carefully to understand the documents required to be submitted as part of the bid. Please note the number of covers in which the bid documents have to be submitted, the number of documents - including the names and content of each of the document that need to be submitted. Any deviations from these may lead to rejection of the bid.

3) To avoid Network congestion, Bidder is recommended to upload file size of up to Maximum 35 MB per part. However, in case file size exceeds 35 MB, bidder may compress the files by scanning with 75 dpi setting as per s.no 4 below and can use additional 25 MB space ("My Documents") provided to the bidder as per s.no 5 below.

4) Bidder, in advance, should get ready the bid documents to be submitted as indicated in the tender document and generally, they can be in PDF / XLS / RAR / DWF formats. **Bid documents may be scanned with 75 dpi with black and white option. However, Price Schedule / SOR shall be strictly in RAR format without altering any contents of the formats uploaded by EIL in their Bidding Document.**

5) To avoid the time and effort required in uploading the same set of standard documents which are required to be submitted as a part of every bid, a provision of uploading such standard documents (e.g. PAN card copy, annual reports, auditor certificates etc.) has been provided to the bidders. Bidders can use "My Documents" area available to them to upload such documents. These documents may be directly submitted from the "My Documents" area while submitting a bid, and need not be uploaded again and again. This will lead to a reduction in the time required for bid submission process.

SUBMISSION OF BIDS

1) Bidder should log into the site well in advance for bid submission so that he/she upload the bid in time i.e. on or before the bid submission time. Bidder will be responsible for any delay due to other issues.

2) The bidder has to digitally sign and upload the required bid documents one by one as indicated in the tender document.

3) Bidder has to select the payment option as "offline" to pay the tender fee / EMD as applicable and enter details of the instrument.

4) Bidder should prepare the EMD as per the instructions specified in the tender document. The original should be posted/couriered/given in person to the Tender Processing Section, as per instructions specified in ITB. The details of the DD/any other accepted instrument, physically sent, should tally with the details available in the scanned copy and the data entered during bid submission time. Otherwise the uploaded bid will be rejected.

5) A Price Bid format has been provided with the tender document to be filled by all the bidders. Bidders are requested to note that they should necessarily submit their financial bids in the format provided and no other format is acceptable. Bidders are required to download the Price Bid file, open it and complete the cells with their respective financial quotes and other

Copyrights EIL – All rights reserved

details (such as name of the bidder). No other cells should be changed. Once the details have been completed, the bidder should save it and submit it online, without changing the filename. If the Price Bid file is found to be modified by the bidder, the bid will be rejected.

6) The server time (which is displayed on the bidders' dashboard) will be considered as the standard time for referencing the deadlines for submission of the bids by the bidders, opening of bids etc. The bidders should follow this time during bid submission.

7) All the documents being submitted by the bidders would be encrypted using PKI encryption techniques to ensure the secrecy of the data. The data entered cannot be viewed by unauthorized persons until the time of bid opening. The confidentiality of the bids is maintained using the secured Socket Layer 128 bit encryption technology. Data storage encryption of sensitive fields is done.

8) The uploaded tender documents become readable only after the tender opening by the authorized bid openers.

9) Upon the successful and timely submission of bids, the portal will give a successful bid submission message & a bid summary will be displayed with the bid no. and the date & time of submission of the bid with all other relevant details.

10) The bid summary has to be printed and kept as an acknowledgement of the submission of the bid. This acknowledgement may be used as an entry pass for any bid opening meetings.

RETENDER

Please note that if Tender has been retendered, than it is mandatory for the bidder to submit their offer again on CPP Portal.

WITHDRAWAL OF BID

It may please be noted that bidders now have an additional feature of withdrawing their bids before due date and time. After submitting the bid on the CPP Portal, if the bidder wishes to withdraw his bid, he can do so. However, if the bidder withdraws his bid, he will be exempted from further participation in the tender and won't be able to submit his bid again for that particular tender.

ASSISTANCE TO BIDDERS

1) Any queries relating to the tender document and the terms and conditions contained therein should be addressed to the Tender Inviting Authority for a tender or the relevant contact person indicated in the tender.

2) Any queries relating to the process of online bid submission or queries relating to CPP Portal in general may be directed to the 24 x 7 CPP Portal Helpdesk. The contact number for the helpdesk is 1800-3070-2232 and Mobile Nos +91-7878007972, +91-7878007973.

Copyrights EIL – All rights reserved

Restriction on Procurement from Bidders from Country(ies) sharing land border with India

1.0 Department of Expenditure (DoE) vide **O.M. No. 7/10/2021-PPD(1) dated 23.02.2023** has issued the revised guidelines for Restrictions on Procurement from Bidders from Country(ies) sharing Border with India. These guidelines are available on the website of DoE (https://doe.gov.in).

2.0 **Requirement of registration from Competent Authority:**

i). Any Bidder from a country which shares a land border with India will be eligible to bid in any procurement whether of goods, services (including consultancy services and non-consultancy services) or works (including turnkey projects) only if the Bidder is registered with the Competent Authority, specified in **Annexure-I of DoE O.M. No. 7/10/2021-PPD(1) dated 23.02.2023.**.

ii). Any Bidder (including an Indian bidder) who has a Specified Transfer of Technology (ToT) arrangement with an entity from a country which shares a land border with India will be eligible to bid in any procurement whether of goods, services (including consultancy services and non-consultancy services) or works (including turnkey projects) only if the Bidder is registered with the Competent Authority, specified in **Annexure-I of DoE O.M. No. 7/10/2021-PPD(1) dated 23.02.2023.**

3.0 **This Order shall not apply to the following special cases:**

i). In projects which receive international funding with the approval of the Department of Economic Affairs (DEA), Ministry of Finance, the procurement guidelines applicable to the project shall normally be followed, notwithstanding anything contained in this order and without reference to the Competent Authority. Exceptions to this shall be decided in consultation with DEA.

ii). This order shall not apply to procurement by Indian missions and by offices of Government agencies/ undertakings located outside India.

iii). This order will not apply to Bidders (or Entities) from those countries (even if sharing a land border with India) to which the Government of India has extended lines of credit or in which the Government of India is engaged in development projects. Updated lists of countries to which lines of credit have been extended or in which development projects are undertaken are given on the website of the Ministry of External Affairs.

iv). Procurement of spare parts and other essential service support like Annual Maintenance Contract (AMC)/ Comprehensive Maintenance Contract (CMC), including consumables for closed systems, from Original Equipment Manufacturers (OEMs) or their authorized agents, shall be exempted from the requirement of registration.

4.0 **Definitions**:

i). **"Bidder"** (including the term 'Tenderer', 'Consultant' 'Vendor' or 'Service Provider' in certain contexts) means any person or firm or company,

including any member of a Consortium or Joint Venture (that is an association of several Persons, or Firms or Companies), every artificial juridical person not falling in any of the descriptions of Bidders stated hereinbefore, including any Agency, Branch or Office controlled by such person, participating in a procurement process.

ii). **"Tender"** will include other forms of procurement, except where the context requires otherwise.

iii). **"Transfer of Technology"** means dissemination and transfer of all forms of commercially usable knowledge such as transfer of know-how, skills, technical expertise, designs, processes and procedures, trade secrets, which enables the acquirer of such technology to perform activities using the transferred technology independently. (Matters of interpretation of this term shall be referred to the Registration Committee constituted by the Department for Promotion of Industry and Internal Trade, and the interpretation of the Committee shall be final.)

iv). **"Specified Transfer of Technology"** means a transfer of technology in the sectors and/ or technologies, specified in **paragraph 5.0**, occurring on or after 23.07.2020.

v). **"Bidder (or entity) from a country which shares a land border with India"** means

(a) An entity incorporated, established or registered in such a country; or

(b) A subsidiary of an entity incorporated, established or registered in such a country; or

(c) An entity substantially controlled through entities incorporated, established or registered in such a country; or

(d) An entity whose beneficial owner is situated in such a country; or

(e) An Indian (or other) agent of such an entity; or

(f) A natural person who is a citizen of such a country; or

(g) A Consortium or Joint Venture where any member of the Consortium or Joint Venture falls under any of the above.

vi). **Beneficial Owner** for the purposes of **paragraph 4.0 v) (d)** will be as under:

a) **In case of a Company or Limited Liability Partnership**, the beneficial Owner is the natural person(s), who, whether acting alone or together, or through one or more juridical person(s), has a controlling ownership interest or who exercises control through other means.

Explanation: -

1. "Controlling ownership interest" means ownership of, or entitlement to, more than twenty-five per cent of shares or capital or profits of the company;

2. "Control" shall include the right to appoint the majority of the Directors or to control the management or policy decisions,

including by virtue of their shareholding or management rights or shareholders agreements or voting agreements;

b) **In case of a Partnership Firm**, the beneficial Owner is the natural person(s) who, whether acting alone or together, or through one or more juridical person, has ownership of entitlement to more than fifteen percent of capital or profits of the partnership;

c) **In case of an Unincorporated Association or body of Individuals**, the beneficial Owner is the natural person(s), who, whether acting alone or together, or through one or more juridical person, has ownership of or entitlement to more than fifteen percent of the property or capital or profits of such association or body of individuals;

d) Where no natural person is identified under a) or b) or c) above, the beneficial Owner is the relevant natural person who holds the position of senior managing official;

e) **In case of a Trust**, the identification of beneficial Owner(s) shall include identification of the author of the trust, the trustee, the beneficiaries with fifteen percent or more interest in the trust and any other natural person exercising ultimate effective control over the trust through a chain of control or ownership.

vii). **"Agent'** is a person employed to do any act for another, or to represent another in dealings with third persons.

[Note:

i). A person who procures and supplies finished goods from an entity from a country which shares a land border with India will, regardless of the nature of his legal or commercial relationship with the producer of the goods, be deemed to be an Agent for the purpose of this Order.

ii). However, a Bidder who only procures raw material, components etc. from an entity from a country which shares a land border with India and then manufactures or converts them into other goods will not be treated as an Agent.]

5.0 **Sensitive Sectors/ Technologies (relevant only for the provisions on ToT arrangements):**

i). Certain sectors and technologies have been identified as sensitive from the national security point of view. **The sectors listed in Schedule I (copy attached) are considered Category-I sensitive sectors**. **The sectors listed in Schedule II (copy attached) are considered Category-II sensitive sectors**. The technologies listed in **Schedule III** (copy attached) are considered sensitive technologies.

ii). For **Category-I sensitive sectors**, Bidders with ToT arrangement in any technology with an entity from a country which shares a land border with India shall require registration.

iii). For **Category-II sensitive sectors**, Bidders with ToT arrangement in the sensitive technologies listed in **Schedule III**, with an entity from a country which shares a land border with India shall require registration.

iv). In **Category-II sensitive sectors**, the Secretary (or an officer not below the rank of Joint Secretary to Government of India, so authorized by the Secretary) of the Ministry/ Department of the Government of India is empowered, after due consideration, to waive the requirement of registration for a particular item/ application or a class of items/ applications from the requirement of registration, even if included in Schedule-Ill. The Ministry/ Department concerned shall intimate the Department for Promotion of Industry and Internal Trade (DPllT) and National Security Council Secretariat (NSCS) of their decision to waive the requirement of registration.

Ministries/ Departments of the Government of India are not required to consult the DPllT/ NSCS before deciding and are only required to intimate the decision to DPllT/ NSCS. If any point is raised by DPllT/ NSCS, it should be considered in future procurements; ongoing procurement for which the waiver was granted need not be interrupted or altered.

Based on security considerations, a Ministry/ Department in a **Category-II sensitive sector** or other Ministries/ Departments may recommend to DPllT inclusion of any other technology in the list of sensitive technologies, either generally or for their Ministry/ Department.

6.0 Sub-contracting in works contracts

In works contracts, including turnkey contracts, Contractors shall not be allowed to sub-contract works to any Contractor from a country which shares a land border with India unless such contractor is registered with the Competent Authority. The definition of **"Contractor from a country which shares a land border with India"** shall be as given in above **paragraph 4.0 v)**.

[Note: Procurement of raw material, components, etc. does not constitute sub- contracting.]

7.0 Certificate regarding compliance

Bidder shall submit a certificate of Compliance in the enclosed **Form-I A/ Form-I B/ Form - II** (as applicable).

This certificate shall be on the Bidder's Letter head and shall be duly signed & stamped by the authorised signatory of the Bidder.

In case at any stage, if it found the certification given by the Bidder is false, their Bid shall be rejected and shall be liable for other penal actions like placement on Suspension/ banning or forfeiture of EMD (if applicable). However, if this is found after order placement, this would be ground for immediate termination and further legal actions in accordance with law/ provisions of Bidding Document including suspension/ banning and forfeiture of CPBG/ Security Deposit.

Form- I A

BIDDER'S UNDERTAKING

(On Company's Letter Head)

To,

M/s Engineers India Limited/ _____ (Name of the client)

Tender Name : _____

Tender No. : _____

"I have read the clause regarding restrictions on procurement from a Bidder of a country which shares a land border with India; I hereby certify that, Bidder M/s_____ (Name of the Bidder) is:

i).	Not from such a country	[ ]
ii).	If from such a country, has been registered with the Competent Authority	[ ]

Notes:

a) Bidder to tick appropriate option (√) in either i) or ii) above)

b) In case of sl. no. ii) above, Bidder to attach evidence of valid registration by the Competent Authority.

I hereby certify that the Bidder fulfills all requirements in this regard and eligible to be considered.

Place :
Date :

Signature (#):
Name :
Designation :
Seal :

(#) Undertaking shall be signed by the authorized signatory of the Bidder.

Form- I B

BIDDER'S UNDERTAKING IN CASE OF SUB-CONTRACTING IN WORK CONTRACTS

(On Company's Letter Head)

To,

M/s Engineers India Limited/ _____ (Name of the client)

Tender Name : _____

Tender No. : _____

"I have read the clause regarding restrictions on procurement from a Bidder of a country which shares a land border with India and on sub-Contracting to Contractors from such countries; I hereby certify that, Bidder M/s_____ (Name of the Bidder) is:

i).	Not from such a country	[ ]
ii).	If from such a country, has been registered with the Competent Authority and will not sub-Contract work to a Contractor from such countries unless such Contractor is registered with the Competent authority	[ ]

Notes:

a) Bidder to tick appropriate option (√) in either i) or ii) above)

b) In case of sl. no. ii) above, Bidder to attach evidence of valid registration by the Competent Authority.

I hereby certify that the Bidder fulfills all requirements in this regard and eligible to be considered.

Place :
Date :

Signature (#):
Name :
Designation :
Seal :

(#) Undertaking shall be signed by the authorized signatory of the Bidder.

Form-II

BIDDER'S UNDERTAKING IN CASE OF TRANSFER OF TECHNOLOGY (ToT) ARRANGEMENT

(On Company's Letter Head)

To,

M/s Engineers India Limited/ _____ (Name of the client)

Tender Name : _____

Tender No. : _____

"I have read the clause regarding restrictions on procurement from a Bidder having Transfer of Technology (ToT) arrangement. Bidder M/s_____ (Name of the Bidder), hereby certify that,

i).	Bidder does not have any ToT arrangement requiring registration with the competent authority	[ ]
ii).	Bidder has valid registration to participate in this procurement	[ ]

Notes:

a) Bidder to tick appropriate option (√) in either i) or ii) above)

b) In case of sl. no. ii) above, Bidder to attach evidence of valid registration by the Competent Authority.

I hereby certify that the Bidder fulfills all requirements in this regard and eligible to be considered.

Place :
Date :

Signature (#):
Name :
Designation :
Seal :

(#) Undertaking shall be signed by the authorized signatory of the Bidder

Integrity Pact

Between
Petronet LNG Limited hereinafter referred to as "The Principal",

And

.....

.....hereinafter referred to as "Counterparty"

Preamble

The Principal intends to award, under laid down organizational procedures, Contract/s for .....
The Principal values full compliance with all relevant laws and regulations, and of fairness and transparency in its relations with its all counterparties.

In order to achieve these goals, The Principal has appointed an external independent monitor (*Refer Bid Data Sheet (BDS) for details of independent monitor*) who will monitor the tender process and the execution of the contract for compliance with the principles mentioned above.

Section I - Commitments of the Principal

1. The Principal commits itself to take all measures necessary to observe the following principles:-

   a) The Principal is committed to have most ethical business dealings with Counterparties.
   b) The Principal values its relationship with all Counterparties and will deal with them in a transparent manner with equity and fairness.
   c) The Principal and/or its Associates (Officers, Directors, Agents, Consultants, Advisors, etc.) will not seek or take any undue benefit directly or indirectly for themselves or for third parties.
   d) The Principal will exclude all of Associates who may be prejudiced or have a Conflict of interest in dealings with Counterparties.
   e) The Principal will honour its commitments and make due payments to Counterparties on timely basis.
   f) The Principal will initiate action and pursue it vigorously whenever corruption or unethical behaviour occurs.

2. No Associate of the Principal, personally or through family members, will in connection with the tender for , or the execution of a contract, demand, take a promise for or accept, for

him/herself or third person, any material or immaterial benefit which he/she is not legally entitled to.

3. The Principal will, during the tender process treat all Counterparties with equity and fairness. The Principal will in particular, before and during the tender process, provide to all Counterparties the same information and will not provide to any Counterparty confidential/ additional information through which the Counterparty could obtain an advantage in relation to the tender process or the contract execution.
4. If the Principal obtains information on the conduct of any of its Associates, which is a breach of the above or a criminal offence under the relevant Anti-Corruption Laws of India, or if there be a substantive suspicion in this regard, the Principal will inform the Independent Monitor and in addition can initiate disciplinary actions.

Section II - Commitments of the Counterparties

The Counterparty commits itself to take all measures necessary to prevent corruption. He commits himself to observe the following principles during his participation in the tender process and during the contract execution.

1. The Counterparty will not, directly or through any other person or firm, offer, promise or give to any of the Principal's Associate employees involved in the tender process or the execution of the contract or to any third person any material or immaterial benefit which he/she is not legally entitled to, in order to obtain in exchange any advantage of any kind whatsoever during the tender process or during the execution of the contract.
2. The Counterparty will not enter with other Counterparty into any undisclosed agreement or understanding, whether formal or informal. This applies in particular to prices, specifications, certifications, subsidiary contracts, submission or non-submission of bids or any other actions to restrict competitiveness or to introduce cartelization in the bidding process.
3. The Counterparty will not commit any offence under the relevant Anti-corruption Laws of India the Counterparty will not use improperly, for purposes of competition or personal gain, or pass on to others, any information or document provided by the Principal as part of the business relationship, regarding plans, technical proposals and business details, including information contained or transmitted electronically unless authorized by Petronet.
4. The Counterparty will not instigate third persons to commit offences outlined above or be an accessory to such offences.
5. The Counterparty will not bring any Political, governmental or diplomatic influence to gain undue advantage in its dealings with Petronet.
6. The Counterparty will not make any false or misleading allegation against Petronet or its Associates.

Section III- Disqualification from tender process and exclusion from future contracts

1. If the Counterparty has committed a transgression through a violation of Section II such as

to put his reliability or credibility into question, the Principal is entitled also to exclude the Counterparty from future contract award processes. The imposition and duration of the exclusion will be determined by the severity of the transgression. The severity will be determined by the circumstances of the case, in particular the number of transgressions, the position of the transgressors within the company hierarchy of the Counterparty and the amount of the damage. The exclusion will be imposed for a minimum of 6 months and maximum of 3 years.

2. The Counterparty accepts and undertakes to respect and uphold the Principal's absolute right to resort to and impose such exclusion and further accepts and undertakes not to challenge or question such exclusion on any ground, including the lack of any hearing before the decision to resort to such exclusion is taken. This undertaking is given freely and after obtaining independent legal advice.
3. If the Counterparty can prove that he has restored/recouped the damage caused by him and has installed a suitable corruption prevention system, the Principal may revoke the exclusion prematurely.

Section IV - Compensation for Damages

1. If the Principal has disqualified the Counterparty from the tender process prior to the award according to Section - III the Principal is entitled to demand and recover from the Counterparty liquidated damages equivalent Earnest Money Deposit / Bid Security.
2. If the Principal has terminated the contract according to Section- III, or if the Principal is entitled to terminate the contract according to Section - III (3), the Principal shall be entitled to demand and recover from the counterparty Contractor liquidated damages equivalent to Security Deposit / Performance Bank Guarantee.

Section V - Previous transgression

1. The Counterparty declares that no previous transgressions occurred in the last 3 years with any other Company that could justify his exclusion from the tender process.
2. If the Counterparty makes incorrect statement on this subject, he can be disqualified from the tender process or the contract, if already awarded, can be terminated for such reason.

Section VI – Equal treatment of all Counterparty / Subcontractors

1. The Counterparty undertakes to demand from all subcontractors a commitment in conformity with this Integrity Pact, and to submit it to the Principal before contract signing.
2. The Principal will disqualify from the tender process all bidders who do not sign this Pact or violate its provisions.

Section VII - Criminal charges against violating Counterparty/ Subcontractors

If the Principal obtains knowledge of conduct of a Counterparty or Subcontractor, or of an employee or a representative or an associate of a Counterparty or Subcontractor which

constitutes corruption, or if the Principal has substantive suspicion in this regard, the Principal will inform the lndependent Monitor who may initiate criminal proceedings against the violator.

Section VIII -lndependent Monitor

1. The Principal will appoint competent and credible lndependent Monitor for this Pact, who shall be one of the lndependent Director on the Board of the Principal. The task of the lndependent Monitor is to review independently and objectively, whether and to what extent the parties comply with the obligations under this agreement.
2. The lndependent Monitor is not subject to instructions by the representatives of the parties and performs his functions neutrally and independently. He reports to the Chairperson of the Board of the Principal.
3. The Counterparty will accept that the lndependent Monitor has the right to access without restriction to all Project documentation of the Principal including that provided by the Counterparty. The Counterparty will also grant the Monitor, upon his request and demonstration of a valid interest, access to his project documentation.
4. The Principal will provide to the lndependent Monitor sufficient information when requested about all meetings among the parties related to the Project provided such meetings could have an impact on the contractual relations between the Principal and the Contractor. The parties offer to the Monitor the option to participate in such meetings.
5. As soon as the lndependent Monitor notices, or believes to notice, a violation of this agreement, he will so inform the Management of the Principal and request the Management to discontinue or heal the violation, or to take other relevant action.
6. The word 'lndependent Monitor' would include both singular and plural.

Section IX - Pact Duration

This Pact begins when both parties have legally signed it. lt expires for the Contractor 12 months after the last payment under the respective contract, and for all other Counterparties 6 months after the contract has been awarded.

lf any claim is made / lodged during this time, the same shall be binding and continue to be valid despite the lapse of this pact as specified above, unless it is discharged / determined by Chairperson of the Principal.

Section X - Other Provisions

1. This agreement is subject to Indian Law. Place of performance and jurisdiction is the Registered Office of the Petronet LNG Ltd, World Trade Centre, First Floor, Babar Road, Barakhamba Lane, New Delhi.
2. Changes and supplements as well as termination notices need to be made in writing. Side agreements have not been made.

3. If the Counterparty is a partnership or a consortium; this agreement must be signed by all partners or consortium members.
4. Should one or several provisions of this agreement turn out to be invalid, the remainder of this agreement remains valid. In this case, the parties will strive to come to an agreement to their original intentions.



For the Principal

.....

For the Counterparty

Place .....

Witness 1: .....

Date .....

Witness 2: .....

PROFORMA OF BANK GUARANTEE FOR EMD

(To be submitted on non-judicial stamp paper of appropriate value to be purchased in the name of the issuing Bank)

To,
Petronet LNG Limited
4th Floor, Tower-I, World Trade Center
Nauroji Nagar
New Delhi - 110029

BG No. : _____
Date of Issue : _____
Date of Expiry : _____
(1 Month beyond bid validity)
Date of Claim : _____
Bank Name : _____

Dear Sirs,

1. In consideration of Petronet LNG Limited established under the Company's Act, 1956 having its registered office at 4th Floor, Tower-I, World Trade Center, Nauroji Nagar, New Delhi-110029, India (hereinafter referred to as the "Company" which expression shall unless repugnant to the context or meaning thereof, include all its Successors, Administrators, Executors and permitted Assignees), has floated/issued a Tender/ Bidding Document for _____ (Name of work)[Bidding Document No.:_____] through press notification/ on limited basis, (hereinafter referred to as the "Tender" which expression shall include all the amendments thereto) and M/s _____ (Name of Bidder) having its Head/Registered Office at_____(herein after referred to as the "Bidder" which expression unless repugnant to the context or meaning thereof, shall include all its Successors, Administrators, Executors and permitted Assignees) have submitted a Bid in response to the Tender enquiry and the Bidder having agreed to furnish as a condition precedent for participation in the said Tender an unconditional and irrevocable Bank Guarantee *hereinafter shall be referred to as this "Guarantee"+ of value_ _____[in fig. as per currency indicated in Notice/Letter Inviting Bid] [in words_____ _____] for the due performance of the Bidder's obligations as contained in the Instructions to Bidder *ITB+ and other terms and conditions contained in the Tender document supplied by the Company which amount is liable to be forfeited on the happening of any of the contingencies mentioned in the said Tender document.

2. We_____(Name of Bank) established /registered under the laws of_____(Name of the Country and Act/Laws) having its registered office at_____(hereinafter referred to as the "Bank" which expression shall unless repugnant to the context or meaning thereof include all its successors, administrators, executors and permitted assignees) do hereby guarantee on behalf of the Bidder and undertake to pay immediately on demand signed by the Company's duly authorized officer, to the Company any money or all money up to the extent of the value of this Guarantee at the time but in any case not exceeding (in Fig. with Currency) _____(in words with Currency) in aggregate at any time without any demur, reservation, recourse, contest and/or without any reference to the Bidder. Any such demand made by the Company on the Bank shall be conclusive and binding on the Bank irrespective of any dispute or difference raised by the Bidder or any dispute pending before any Court, Tribunal, Arbitrator or any other authority.

3. The Bank confirms that this Guarantee has been issued in accordance with the appropriate laws in India [the country of issue].

4. The Bank also agrees that this Guarantee herein contained shall be irrevocable and shall continue to be enforceable in accordance with the Indian Laws and subject to exclusive jurisdiction of Indian Courts as per condition stipulated in Tender Document.

5. The Bank also agrees that the Company at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor, in the first instance, without proceeding against the Bidder and without any reference to the Bidder and notwithstanding any security or other Guarantee that the Company may have in relation to the Bidder's liabilities.

6. The Bank further agrees that this Guarantee herein contained shall remain in full force up to and including one month after the expiry of the Period of Bid validity i.e. upto _____ [01 Month beyond the bid validity] that is taken as the obligations of the Bidder as per Tender document and it shall continue to be enforceable until all the dues of the Company, if any, under or by virtue of this Guarantee have been fully paid and its claim satisfied or discharged.

7. The Bank further agrees that this Guarantee shall not be determined or affected by the liquidation or winding up, dissolution or change of constitution or insolvency of the Bidder during the period this Guarantee is in force but shall be in all respects and for all purposes be binding and operative until payment of all money due to the Company in respect of such liability or liabilities is paid or no claim is lodged by the Company to the Bank within the claim period after the Guarantee expires.

8. The Bank further agrees that this Guarantee shall not be affected by any change in the Bank's Constitution. The Bank also undertakes not to revoke this Guarantee during its currency.

9. The Bank further agrees that to fulfill the Bidder's liability during the bidding process, if requested by the Bidder in writing, the Bank shall issue Amendment to this Guarantee, as and when required, incorporating the extended date of validity and/or other amendment.

10. Notwithstanding anything contained herein above:

    a) The Bank's liability under this Guarantee is limited to -_____(in Fig with currency) _____ (in words with currency) in aggregate;

    b) This Guarantee shall remain in full force up to and including 30 (thirty) days after the expiry of the Period of Bid validity i.e. up to [Date] and any extension(s) thereof on written instruction from the Bidder on whose behalf this Guarantee has been given, in which case it shall remain in full force up to and including 30 (thirty) days after the extended date; and

    c) The Bank shall be released and discharged from all its liabilities and obligations under this Guarantee unless a written claim or demand is issued to the Bank on or before ____ <Date> or within the 30 (thirty) days of the date of expiry of the extended date and the Company's right under this Guarantee will cease.

11. The Bank further agrees that all claims under this Guarantee is payable to the Company as per the bank details mentioned below:

Beneficiary Name	Petronet LNG Limited
Beneficiary Address	First Floor, World Trade Centre, Babar Road, Barakhamba Lane, New Delhi – 110001
Over Draft Account No.	32519890815
Bank Name	State Bank of India
Branch Address	Corporate Accounts Group Branch-II 4th & 5th Floor, Red Fort Capital Parsvanath Towers, Bhal Vir Singh Marg, Gole Market, Near Speed Post Office.

	New Delhi – 110 001
Branch Code	17313
IFSC Code	SBIN0017313

12. The Bank has the power to issue this Guarantee under its Memorandum and Articles of Association and the undersigned is authorized to sign this Guarantee on behalf of the Bank and to bind the Bank thereby.

IN WITNESS whereof, the Bank_____has executed this Guarantee at_____(Place) on_____(Date)

_____
Signed and Sealed by Constituted Attorney

(Signature of a person authorized to sign on behalf of the Bank)

Name:
Designation: Bank
Name:

In presence of witness:

1. Signature _____

   Name & Designation:

2. Signature _____

   Name & Designation:

[Note: The Bank shall issue the confirmation letter of providing this Guarantee on behalf of the Contractor directly to the beneficiary at the above-mentioned address]

Request Letter: Transmission of Bank Guarantee Cover Message <to be submitted by Bidder to BG issuing bank>

Date: _____
The Manager,
(Bank),
(Branch)
Sub: Inclusion of unique identifier while transmitting BG cover messages.

Dear Sir/Ma'am,
I/We, _____, request you to include unique identifier PLNG574440489 in field 7037 of the SFMS cover messages IFN COV 760 (for BG issuance) and IFN COV 767 (for BG amendment) while transmitting the same to the beneficiary bank (ICICI Bank, IFSC: ICIC00000007). This is required by Petronet LNG Limited as per their tender/contract requirement.

Thanking You,

_____

The Template for MT 760-COV (SFMS) for issuing bank is mentioned below:

{
:7020:
:7022:
:7024:EMD/ BID SECURITY
:7025:INRxxxxx
:7026:
:7027:<Date of Issue>
:7029:<Expiry date>
:7030:<Place of Claim Lodgement>
:7031:<Issuing Bank IFSC>
:7032:<Issuing Bank Name>
:7033:<Bidder Name>
:7034:PETRONET LNG LIMITED <Address>
:7035:ICIC0000007
:7036:ICICI BANK LIMITED
:7037:PLNG574440489
-}

ANNEXURE-VI TO ITB

Instructions for payment of EMD/Tender Fee through

PLL Online EMD Tender Fee Collection portal

a. Please click or copy the link to the browser.

b. Please note that bidder has to make EMD and Tender Fee payments separately.

c. Please fill all the information for EMD or Tender fee, as the case may be, in the online form.

d. Once bidder submit the information then system will redirect to ICICI bank pay2corp web page where bidder can choose following mode for online payment:
   i. Debit Card
   ii. Net banking (Retail/Corporate)
   iii. Challan mode (EMD only)

e. Outcome of payment mode selected:
   i. **Debit card**: once payment is done, bidder will be redirected to PLL webpage and bidder shall get an e-mail confirmation for payment.
   ii. **Net banking (Retail)**: After authorization of payment on the respective bank webpage, bidder will be redirected to PLL webpage and bidder shall get an e-mail confirmation for payment.
   iii. **Net banking (Corporate):** Bidder has to create the Cheque/ RTGS/ NEFT instruction on the respective bank's webpage, and after that bidder shall be redirected to PLL webpage with Payment awaiting message. Thereafter, transaction needs to be authorised by the approvers on the Corporate Net-banking portal of the respective bank and after authorisation, bidder shall get an e-mail confirmation for payment within next 30 Minutes.
   iv. **Challan mode:** Bidder has to generate the Challan on pay2corp page, and then he will be redirected to PLL webpage with Payment awaiting message. Thereafter, bidder needs to make the payment to the bank account details provided in challan. Bidder to ensure payment authorization within 7 days from the date of challan generation. Once the payment is done, bidder shall get an e-mail confirmation for payment within next 30 Minutes.

f. Bidder/s are advised not to close the browser while making online payment through ICICI Pay2corp.

g. Bidder/s should wait for at least 30 minutes for payment confirmation mail after payment authorization in the respective bank.

h. In case, amount is deducted from bidder's bank account and email confirmation has not been received by the bidder, then bidder should attach the proof of payment along with bid.

i. Bidder should ensure the payment amount for EMD/Tender Fee as per Bid Document. In case, bidder has done the payment of incorrect amount then bidder should contact the PLL support team on ***emd@petronetlng.in*****.**

Steps involved (Bidders perspective)

1. Bidder has to open the given link and following web page will be opened in browser.

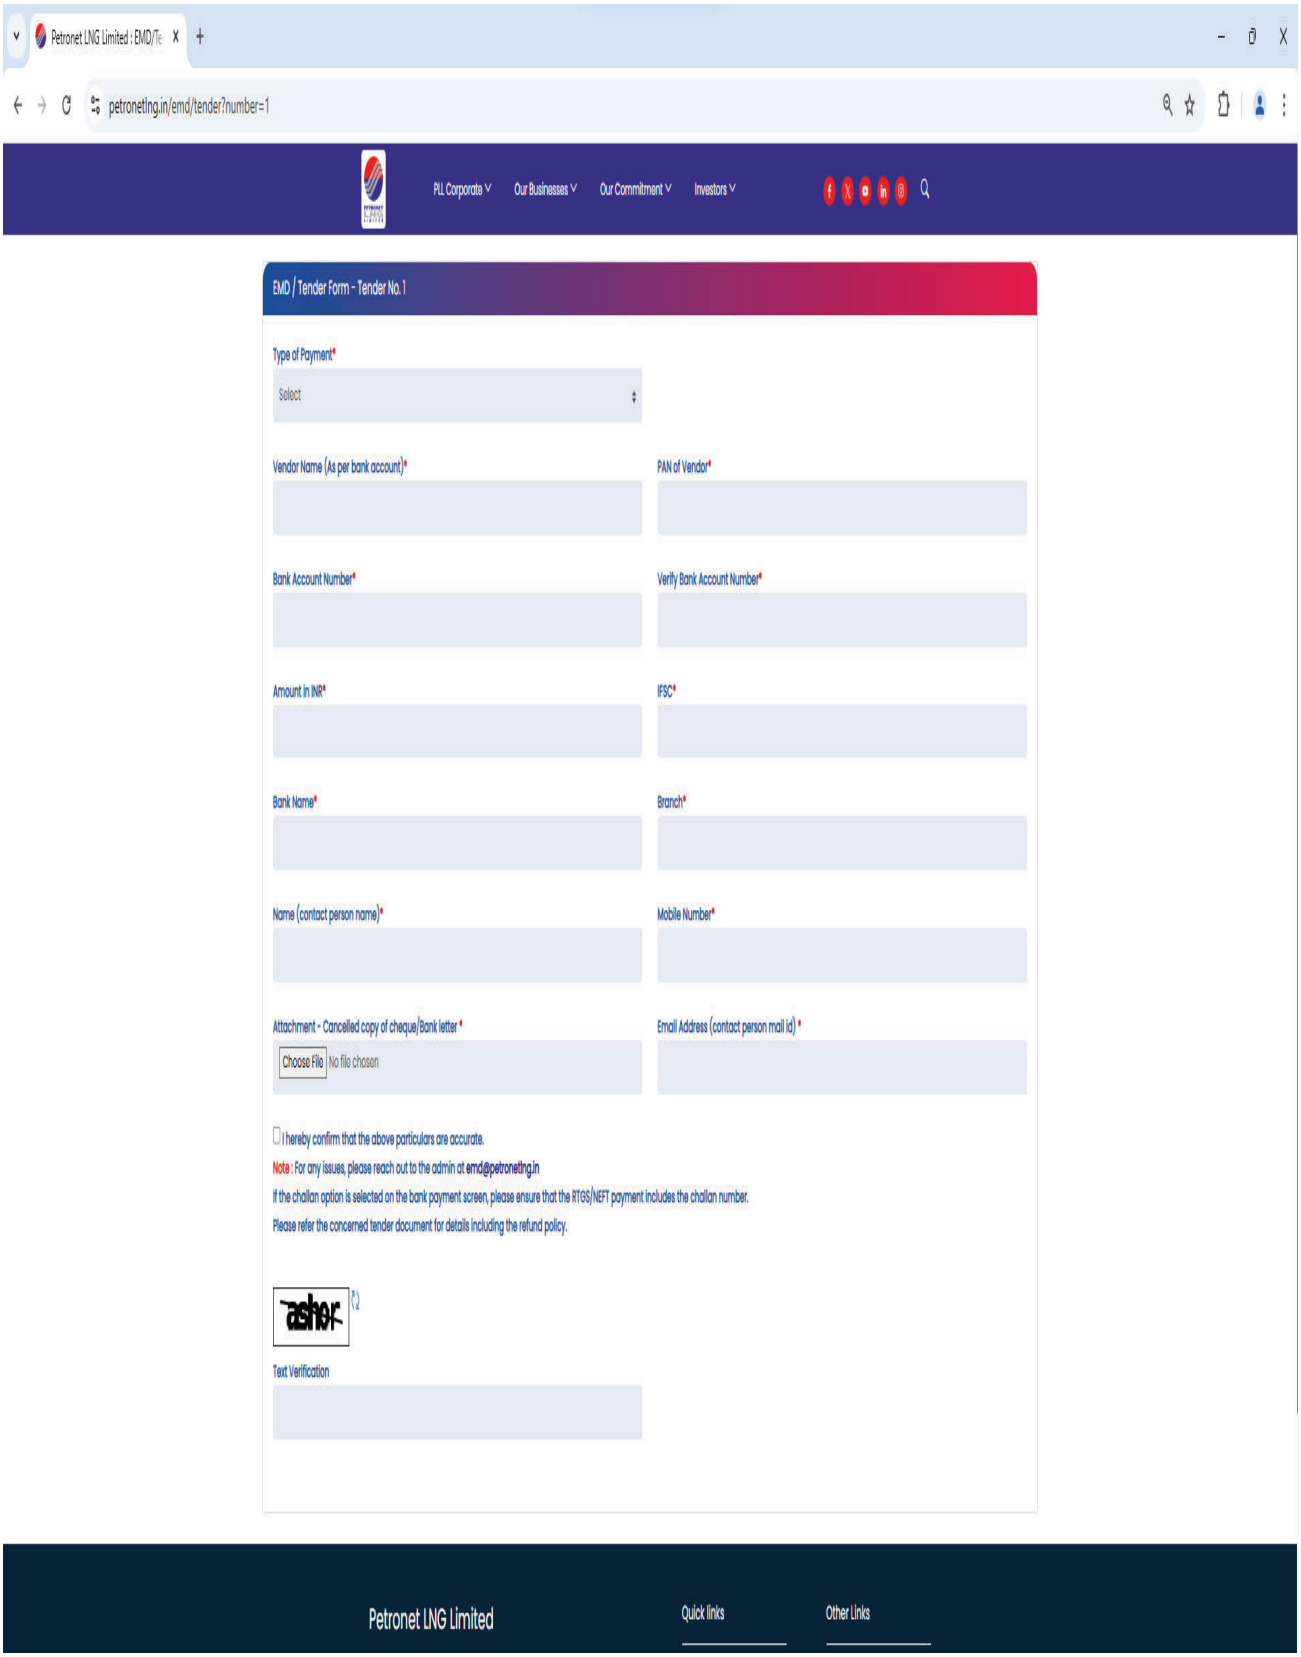

2. Bidder has to fill the following details in respective fields: -

   a. Type of Payment – EMD or Tender Fees
   b. Bidder Name
   c. PAN of Bidder
   d. Bank Account Number
   e. IFSC Code
   f. Amount in INR
   g. Bank Name
   h. Branch
   i. Contact Person Name
   j. Mobile Number
   k. Copy of cancelled Cheque / Bank Letter
   l. Contract Person mail address

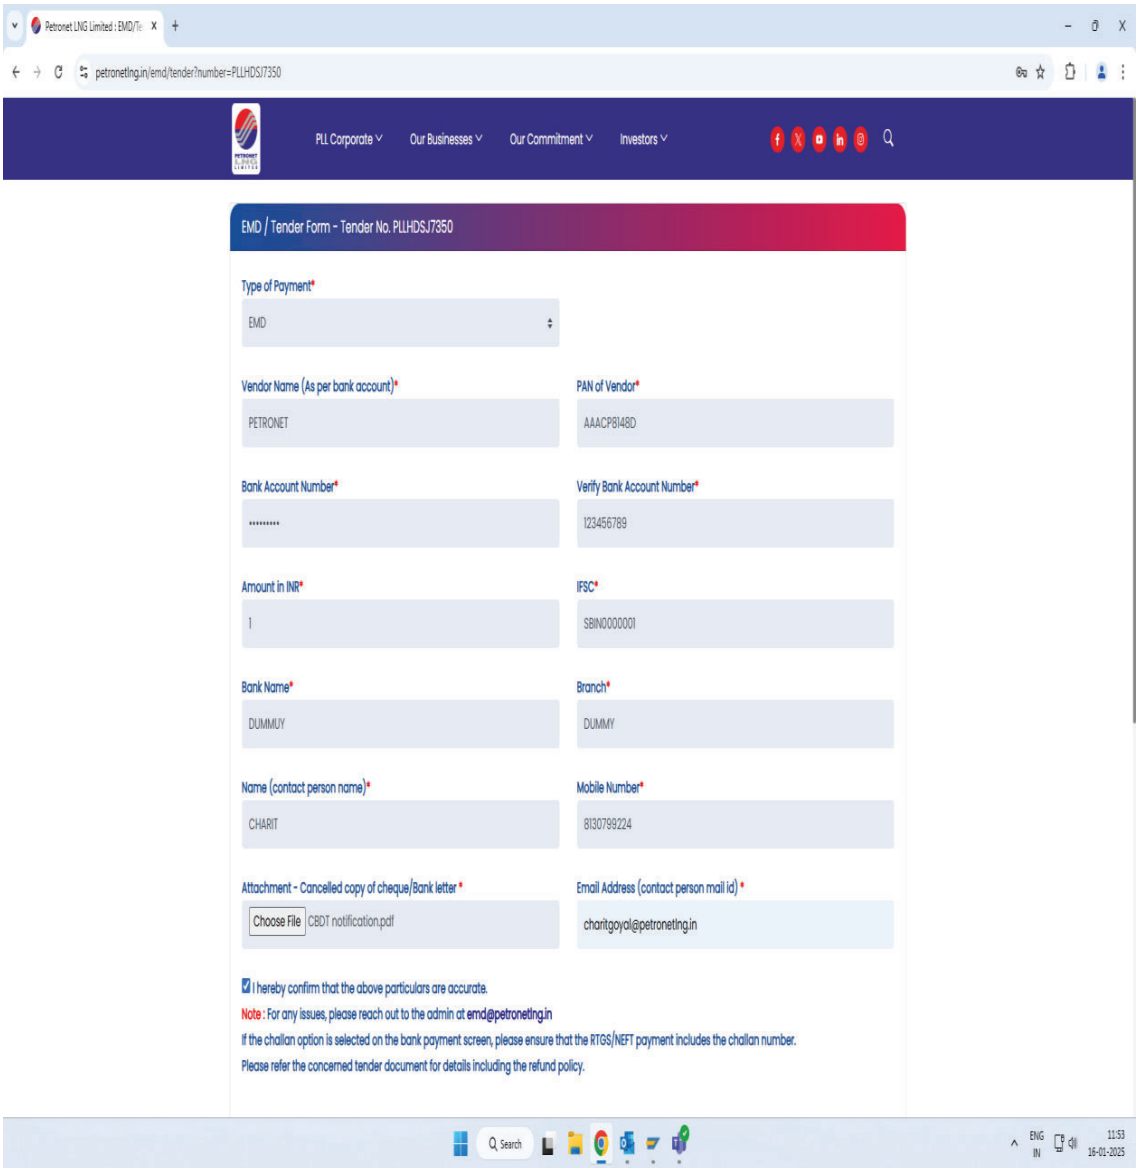

3. Bidder has to certify the filled details, enter captcha and click on Proceed for payment button.

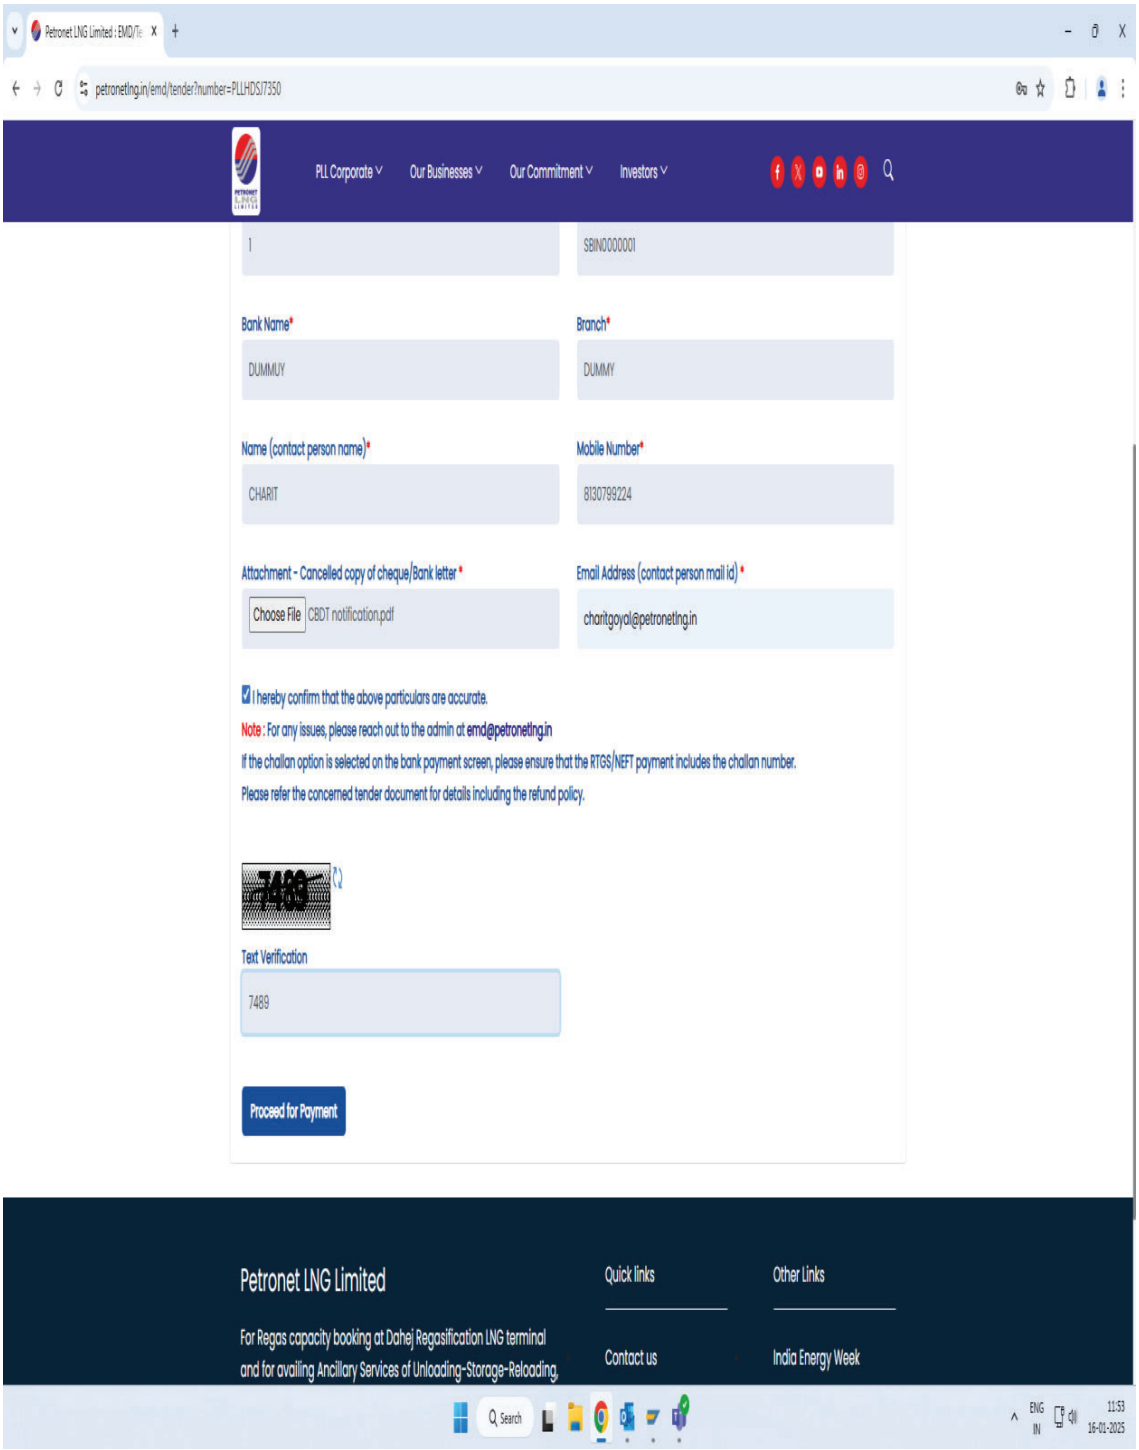

Kindly note that necessary validations are implemented in field box.

In case all details are not filled properly, then Proceed for Payment button will not be shown.

4. Once the Bidder click on Proceed for Payment button, following webpage will open.

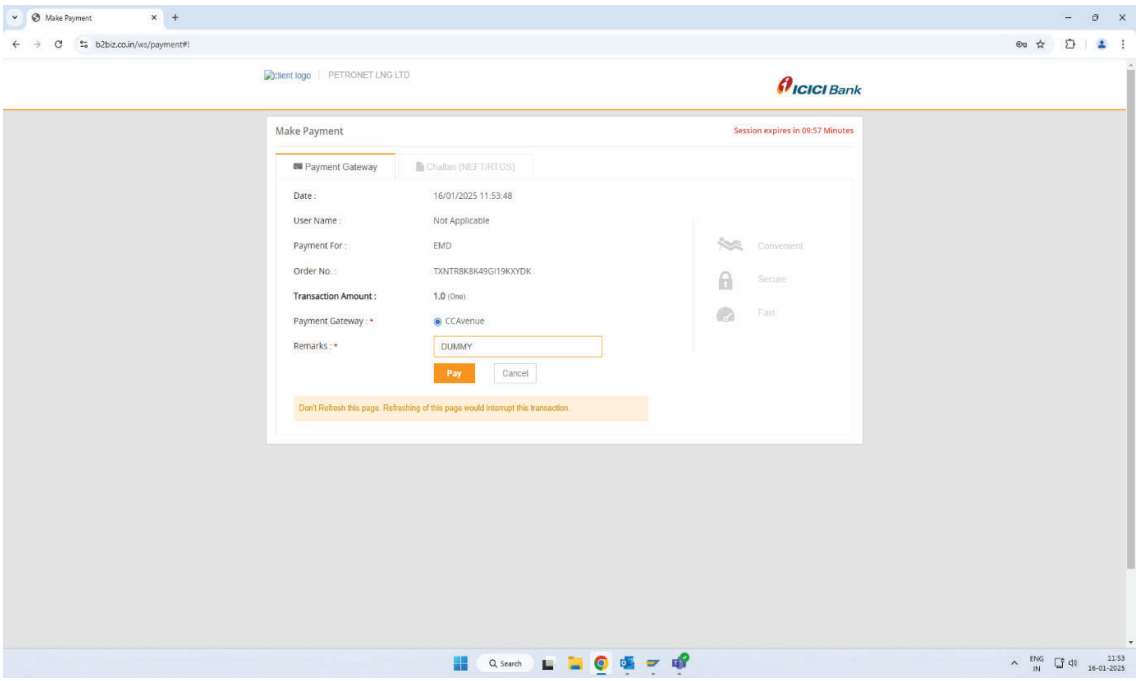

5. Bidder has to select the mode of payment out of the following options: -

a. Payment Gateway

If the Bidder selects Payment Gateway option, then he has to provide **Remarks** and click on **Pay** button. Following webpage will open, where Bidder has to fill the billing information and make the payment from **Net-banking** or **Debit Card** and proceed accordingly.

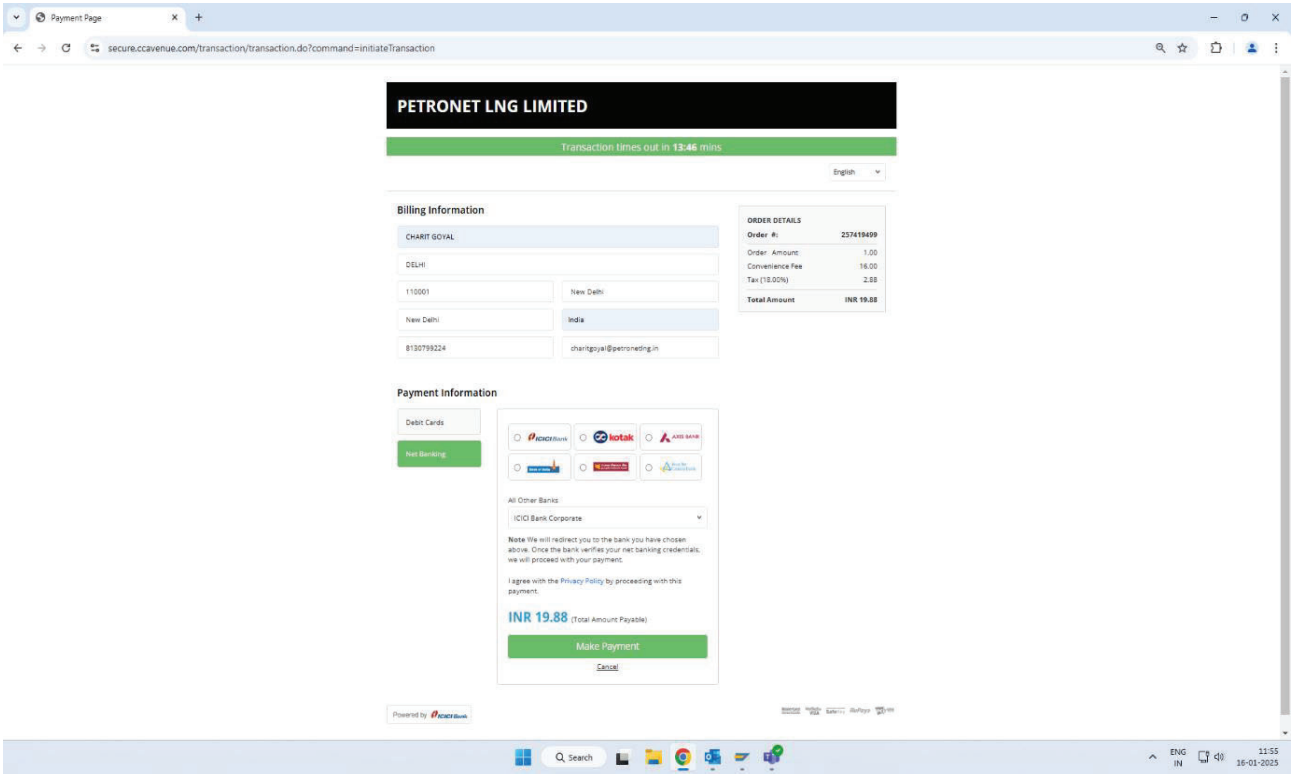

Debit Card

Bidder has to fill the card details and then he will be redirected to the OTP page on Bank's website. Once he enters the OTP, transaction will be completed successfully, and Bidder will be redirected to Petronet EMD page with Payment confirmation message and receipt.

Simultaneously, a system generated mail will be triggered on Bidder's mail id along with Payment Receipt.

Personal Net-banking

Bidder has to click the Net-banking option and select his bank from the list and click on make payment option. Thereafter Bidder will be redirected to the Bank's Net-banking page and login with his credentials and make the payment. Transaction will be completed successfully, and Bidder will be redirected to Petronet EMD page with Payment confirmation message and receipt.

Simultaneously, a system generated mail will be triggered on Bidder's mail id along with Payment Receipt.

Corporate Net-banking

Bidder has to click the Net-banking option and select his bank's corporate portal from the list and click on make payment option. Thereafter Bidder will be redirected to the Bank's Corporate Net-banking page and login with his credentials and create the Cheque/ RTGS/ NEFT instruction. Bidder will be redirected to Petronet EMD page with Payment awaiting message and a system generated mail will be triggered on Bidder's mail id along with pending payment receipt.

Thereafter as per Bidder's SOP in place, transaction need to be authorised by the approvers on the Corporate Net-banking portal. After approval of transaction by the Bidder, status will be updated in the next 30 minutes on Petronet server and a payment success mail will be triggered on Bidder's mail address.

b. Challan Payment

If Bidder select challan payment, a unique challan will be generated, and Bidder will be redirected to Petronet EMD page with Payment awaiting message and a system generated mail will be triggered on Bidder's mail id along with challan.

Thereafter Bidder has to make the NEFT/RTGS payment on the account details provided in the challan generated. After processing of transaction by the Bidder, status will be updated in the next 30 minutes on Petronet server, and a payment success mail will be triggered on Bidder's mail address.

PETRONET LNG LTD	
Date:	09/01/2025 11:19:52
Beneficiary Name:	PETRONET LNG LIMITED PETCHEM ACCOUNT
Beneficiary Account No.:	PTRLNG235610
Beneficiary IFSC:	ICIC0000106
Bank Name:	ICICI Bank
Amount in Figure (in INR):	1.0
Amount in Words (in INR):	One
Reference No.:	TXNCP98XAQBLO985RUK6
Mode of Payment:	NEFT/RTGS
Client Code:	PTRLNG
IP Address &Date:	125.63.96.162 09/01/2025 11:19
Terms &Conditions: Please try to make NEFT/RTGS payment atleast one day prior to tender closing.	
Signature of Depositor	
(For BANK'S USE ONLY)	
Date of Transfer:	
Rupees:	
Debited A/c No.:	
Remittance No.:	
Authorised Signatory	
Branch Stamp	
ICICI Bank	

ENGINEERS INDIA LIMITED

SPECIAL CONDITIONS OF CONTRACT

FOR

PDH PP PLANT WITH ETHANE AND PROPANE HANDLING FACILITIES AT DAHEJ, GUJARAT PROJECT

FOR

PETRONET LNG LIMITED

GLOSSARY

CPBG	Contract Performance Bank Guarantee
OWNER	Petronet LNG Limited (PLL)
Bidder/ Vendor	Whom RFQ/ Tender has been issued/ who have submitted offer against RFQ
FOA / LOA	Fax of Acceptance / Letter of Acceptance
FOB / FOT	Free on Board / Free on Truck
PBG	Performance Bank Guarantee
PO	Purchase Order
PRS	Price Reduction Schedule for delayed Delivery
RFQ	Request for Quotations
BDS	Bid Data Sheet
TOV	Total Order Value
SOR	Schedule of Rates / Price Schedule
TPIA	Third Party Inspection Agency

1 INTRODUCTION

1.1 These Special Conditions of Contract (SCC) shall be read in conjunction with the General Conditions of Contract (GCC), Material Requisition and any other document forming part of this RFQ wherever the context so requires.

1.2 Where any portion of the GCC is repugnant to or at variance with any provisions of the SCC& Bid Data Sheet then unless a different intention appears, the provision(s) of the SCC & Bid Data Sheet shall be deemed to override the provision(s) of GCC only to the extent that such repugnancy of variations in the SCC & Bid Data Sheet are not possible of being reconciled with the provisions of GCC for Goods.

2 PAYMENTTERMS

2.1 Refer BDS for payment terms.

2.2 NOTES:

i) 1ST Milestone payment shall be released only after receipt of CPBG (wherever applicable) Wherever ABG is required to be submitted by the supplier against milestone progress payment, validity of ABG shall be valid till 30 days beyond contractual delivery period which shall be further extended, as required till last date of receipt of all material at site. However, ABG will be released on dispatch/ receipt of material at site (as applicable).

ii) Prorata payments shall be applicable on dispatch of equipment. In case of equipment, prorate shall not be on part of equipment.

iii) In case of indigenous SUPPLIERs, wherever taxes/duties are separately indicated, the order value shall be exclusive of taxes/duties. 100% payment of GST shall be paid on receipt of GST invoices and on proof of payment of GST or on auto-population under GST portal.

iv) Payment to indigenous SUPPLIERs shall be released through Electronic Clearing System (ECS) and to foreign SUPPLIERs, payments other than against shipping documents, i.e., for Site Work and Supervision/Training etc. shall be through wire transfer.

v) **Bidder shall submit Original Invoice to PLL site office in a triplicate.**

vi) Irrevocable Letter of Credit (L/C) shall be acceptable from foreign Suppliers in place of Advance Bank Guarantee as well as Contract cum Performance Bank Guarantee.

vii) For payment to Foreign suppliers: L/C shall be established in favor of the supplier in a bank in his country, for an appropriate amount (in line with Payment Terms). L/C shall be opened within 45 days of receipt of acknowledgement of FOA/PO and receipt of CPBG (wherever applicable). In case confirmed L/C is insisted by supplier, L/C confirmation charges shall be to supplier's account.

viii) All payments (other than through L/C) shall be released within 15 days of receipt of invoice and all requisite documents, complete in all respects.

ix) All bank charges of respective bankers shall be to respective account.

x) Supplier shall submit Billing Schedule within three weeks after placement of FOA/PO (whichever is issued earlier) for EIL/OWNER's approval (wherever applicable). Suppliers requiring multiple dispatches will restrict the number of dispatches to maximum Three, unless agreed otherwise by Project Manager.

xi) In case site front is not available up to 6 (Six) months (wherever site work is applicable), after receipt of all supplies at site, the payment against the site work shall

be released on submission of additional Bank Guarantee of equivalent amount valid for 1 (One) year or such extended period as may be required.

xii) Certification for placement of sub-order and/or identification of major raw material, in the above payment terms, shall be carried out by the EIL Inspection /Third Party Inspection agency.

xiii) Wherever the payment provision is there against ABG, and Vendor is not seeking payment against these milestone, those milestone payment shall be released along with milestone of despatch/ receipt of material at site without seeking any ABG for earlier milestone payment.

xiv) In case of high value Contracts for sophisticated Equipment/ Machinery, if domestic supplier insists payment through LC, this may be considered provided Loading provision is included in Bidding Document.

3 TRANSPORTATION

Clause no. 19 of GCC stands modified to the following extent:

3.1 INDIGENOUS SUPPLIERS

Indigenous SUPPLIERs are required to dispatch the goods on door delivery basis through any registered Transporters on FOT/FOR dispatch point basis or FOT Site basis, as mentioned in RFQ/BDS.

Transportation charges for the items shall be quoted separately as per requirement / scope of MR.

The consignment should be handed over to transporter with E-way bill, wherever required as per law/act. In case such e-way bill is required to be issued by Owner, the concerned designated order issuing authority may be contacted in this regard.

It shall be responsibility of the seller to send intimation immediately on dispatch of the material so that necessary arrangements can be made at site. Delays on account of the same shall solely be attributable to the Supplier.

3.2 FOREIGN SUPPLIERS

Orders in case of foreign suppliers shall be on FOB/CFR Indian seaport of entry basis (JNPT (Nhava Sheva Port) for Containers/ODC & Kandla Port for Break Bulk),wherein the ocean transportation from FOB Port of Exit to the designated Indian Port shall be arranged by the Supplier. All shipments of break bulk material and containerized cargo/ODC shall be made by suitable vessels certified for sea/air worthiness and complying with National/ International safety regulations and age of the vessel being less than 25 years. Bidder to coordinate with PLL nominated Customs House Agent for smooth discharge /delivery of the cargo at the Port of arrival.

Wherever the consignment is required to be shipped by Air (Mumbai Airport for Air Freight), the commercial terms and conditions including INCOTERMS shall be applicable to the extent modified as per BDS.

Bidder shall quote separate prices on FOB Port of Exit basis for Ocean Freight transportation charges. Quoted Ocean freight charges for Break Bulk cargo delivery shall be on FLT (Full Liner Terms), i.e., all charges at destination port shall be borne by the bidder till the cargo is unloaded on to the wharf /vehicle as the case may be. No Trans-shipment is permitted for Break Bulk Cargo/ODC.

Bidder shall inform 07 days prior to the expected date of arrival of vessel in port of entry in India. Detention & Demurrages, if any, due to early arrival of vessel, shall be to bidder's account.

Wherever, the foreign bidder does not accept the ocean transportation in his scope, offer of such bidder shall be rejected.

4 CURRENCY OF QUOTE

4.1 FOREIGNSUPPLIERS

Foreign SUPPLIERs are required to submit prices in one currency out of USD/EURO/GBP/JPY. In case a foreign SUPPLIER is sourcing part of equipment/ services from India, prices of such equipment/ services shall be quoted in Indian Rupees only and terms & conditions applicable to Indian portion shall be as per Annexure-I to this SCC and to be read in conjunction with terms & conditions applicable to Indigenous Suppliers.

Change in currency once quoted will not be allowed.

4.2 INDIGENOUS SUPPLIERS

Indigenous SUPPLIERs are required to submit price in Indian Rupees only.

5 SINGLE POINT RESPONSIBILITY OF THESUPPLIER

In case of MRs containing supplies as well site work/ services, a single order, covering the supply part as well as site work/ services, shall be placed. Split ordering will not be permitted.

In case, a foreign SUPPLIER requests for a separate order on his Indian sub-SUPPLIER, the same shall not be accepted. However, payment to Indian sub-SUPPLIER shall be released directly in Indian Rupees against invoices duly certified by the Foreign SUPPLIER.

For this purpose, the Indian sub-SUPPLIER's name, material/ services and corresponding price in Indian Rupees, shall be clearly spelt out in the purchase order on foreign SUPPLIER. In case a Foreign supplier sources supplies/ services within India, the applicable terms & conditions shall be applicable to the extent as per Annexure-I to this SPC. However, the vendor is not allowed to change the sub supplier during the course of Contract.

6 CONTRACT CUM PERFORMANCE BANK GUARANTEE(CPBG)

6.1 CPBG shall be required for 10% of the Total Order Value (TOV) for all items.

6.2 Total Order Value shall mean supply price (FOT dispatch point price for Indian bidder and FOB/ FCA price for foreign bidders) plus site work (wherever applicable) plus transportation but excluding GST, supervision services, training, HAZOP, 3D-modeling, AMC.

6.3 Indemnity Bond/Corporate Guarantee in lieu of CPBG shall not be considered. For Foreign bidders, Irrevocable stand by Letter of Credit is acceptable in lieu of CPBG.

6.4 CPBG shall not be applicable for orders where the contract value is less than INR 10 Lakhs.

7 TAXES & DUTIES

7.1 Notwithstanding any prejudice to any other provisions of Bidding Document, provisions of Annexure-II of SCC shall be read in conjunction with Clause No. 30 of GCC.

8 FIRM PRICES

8.1 The prices shall be firm and fixed and not subject to any variation, except statutory variation in taxes and duties &imposition of new taxes as per Annexure II.

8.2 In case of Electrical and Instrumentation Cables, variation in prices shall be admissible as per IEEMA Price Variation Clause. *[Refer BDS for applicability of the same].* However, price variation shall be restricted to ceiling of +10 % and no ceiling limit in case of negative variation.

8.3 For 2 years O&M spares, prices shall be kept valid for a period two years from the final bid due date.

9 PRICE REDUCTION SCHEDULE (PRS)

9.1 Price Reduction Schedule shall be as per clause no. 10 of "General Conditions of Contract".

9.2 Wherever the supply period and site work are indicated as two separate periods and notice of site readiness is required for site work, intervening period, if any, shall be excluded, while calculating the price reduction for delay.

9.3 Price reduction shall be affected in the Invoice value before presenting for payment.

9.4 For the purpose of PRS, a delay for a period less than one week shall be considered as delay for the full week.

9.5 Total order value shall mean Supply value plus Site Work value (if applicable) including any amendments/ change order but excluding GST. However, in case of Short Closure/ cancellation, the order Value shall be executed/ supplied value plus the actual cost of work done at the risk & cost of the supplier plus EIL overhead charges.

10 INSPECTION

10.1 Inspection of Indigenous items shall be done by EIL and supplier need not consider these charges while quoting. In the case Indian party sourcing materials from abroad, the bidder shall arrange inspection through Third Party Inspection agency in the country of origin& charges of the same shall be included in quoted prices

10.2 Foreign vendors shall include inspection charges of Third Party Inspection agency in the country of origin. In the case of foreign party sourcing items from India the inspection shall be by EIL, no additional charges shall be payable to seller on account of the same.

10.3 List of approved TPI agencies:

a) M/s TUV SUD South Asia Pvt. Ltd.
b) M/s TUV Rheinland (India) Pvt. Ltd.
c) M/s TUV India Pvt. Ltd. / TUV Nord Group (TUV)
d) M/s Apave Assessments India Pvt. Ltd. (AAIPL)
e) M/s VCS Quality Services Pvt Ltd
f) M/s DNV
g) M/s IR Class Systems and Solutions Pvt Ltd
h) M/s Projects & Development India Ltd (PDIL)
i) M/s Tata Projects Ltd
j) M/s Llyods Register (LRS)
k) M/s Bureau Veritas (BV)
l) M/s SociétéGénérale de Surveillance (SGS)
m) M/s Gulf Lloyds Industrial Services (GLI)
n) M/s International Certification Services (ICS)
o) M/s Bureau Veritas (Ind.) Pvt. Ltd (BVIS)
p) M/s Intertek India Pvt. Ltd.
q) M/s Moody International (Moody)
r) M/s RINA India Pvt. Ltd.
s) M/s Competent Inspectorate and Consultants LLP
t) M/s ABS Industrial Verification (India) Pvt. Ltd.
u) M/s Certification Engineers International Ltd (CEIL)
v) M/s SGS India Pvt. Ltd.

Note: TPI Agencies listed above can depute their foreign counterparts of their respective country, where the inspection needs to be carried out for material/equipment

being supplied by the foreign vendor.

10.4 Seller to note the following:

a) ITP / QAP will be approved by EIL Inspection/Third Party Inspection agency incorporating requirements of ITP, Technical specifications and approved documents as per PR.

b) The Inspection release note issued by the EIL Inspection /Third Party Inspection agency shall clearly stipulate that materials/equipment have been inspected as per Code-1 approved drawings and approved ITP /QAP.

c) Certification of final documents, wherever applicable, for release of final payment, shall be carried out by EIL Inspection /Third Party Inspection agency issuing the final inspection certificate as per PR.

d) Based on indicative inspection and test plan identifying scope of inspection / review of document as minimum requirement, detailed inspection and test plan indicating all specified requirement of Purchase Requisition to be generated by vendor and same duly approved by TPIA to be submitted to EIL/Owner for approval.

e) The price quoted by the bidder shall be inclusive of all IBR/IGC/NACE charges (if applicable) and all statutory certification charges PESO/CCOE etc. (if applicable) as required in the Material Requisition.

11 COMPREHENSIVE MARINE-CUM-ERECTIONINSURANCE

11.1 Clause no. 18 of GCC stands modified to the following extent:

Comprehensive Insurance (Transit/ Marine cum storage, erection, till handing over of equipment) shall be arranged by PLL. Therefore, the same shall not be included in the quoted prices. However, all transit insurance up to FOB / FCA International Sea / Air Port of Exit must be included in the quoted Price.

12 BASIS OF EVALUATION

12.1 WHERE ONLY INDIAN BIDS ARE UNDERCOMPARISON

12.1.1 FOT dispatch point price, Cost of mandatory spares, if identified in the Material Requisition, commissioning spares and special tools & tackles, road freight for price evaluation of bids, but GST, cost of Spares for two years operation& Unit rates of addition/deletion shall be excluded.

12.1.2 AMC charges excluding GST thereon shall be considered for evaluation, wherever AMC is required.

12.1.3 Supervision (man days as indicated in enquiry document), Training, Hazop, 3D-modeling charges, any other charges excluding GST thereon shall be considered for evaluation wherever these services are required.

12.1.4 Site Work charges excluding GST thereon shall be considered for evaluation, wherever applicable.

12.1.5 Technical & Commercial loading, if any, shall be considered for evaluation of bids.

12.2 WHERE ONLY FOREIGN BIDS ARE UNDER COMPARISON

12.2.1 Bids shall be evaluated on the basis of CFR (JNPT (Nhava Sheva Port)) prices including, stowage charges wherever applicable (as quoted by BIDDERs), and considering sea freight as quoted by the bidder.

In case of pipes, if a foreign bidder has not quoted or not included stowage charges, the same shall be loaded @ 10% of bidder's quoted Ocean Freight.

12.2.2 Cost of mandatory spares identified in the Material Requisition, Commissioning Spares and

special tools & tackles will be included for evaluation of bids, but costs of Spares for two years operation & Unit rates of addition/deletion shall be excluded.

12.2.3 AMC charges excluding GST thereon shall be considered for evaluation wherever AMC is required.

12.2.4 Site Work excluding GST thereon, wherever applicable shall be considered for evaluation.

12.2.5 Supervision (man days as indicated in enquiry document) and Training charges excluding GST thereon shall be considered for evaluation, wherever, supervision and training are required.

12.2.6 Technical & Commercial loading, if any, shall be considered for evaluation of bids.

12.2.7 Income tax payable in India, in case foreign bidder quotes net of taxes.

12.2.8 For global enquiries, for evaluation and comparison purposes, the currency(ies) of the Bid shall be converted into a single currency i.e., INR, and the declared rate of exchange (Bills selling rate of State Bank of India) one day prior to the due date of opening of priced bids shall be considered, for conversion purpose.

Note: Wherever any one of the foreign bidders has opted for concessional rate of duty (Multi-Lateral or Bi-Lateral trade agreement between India and bidder's country), the evaluation shall be carried out in line with clause 12.3.2 (v).

12.3 WHERE INDIAN AS WELL AS FOREIGN BIDS ARE UNDER COMPARISON

12.3.1 **INDIGENOUS BIDDERS**:

The evaluated price of indigenous BIDDERs shall be carried out on the basis of landed cost at Site, as per clause 12.1 above.

In addition to above a notional loading @ 1% of FOT dispatch point price towards inspection charges by EIL shall be applied.

12.3.2 **FOREIGN BIDDERS:**

The evaluated price of foreign BIDDERs shall be on the basis of landed cost at Site, including the following:

i) Evaluation shall be done as per clause 12.2 above

ii) Marine insurance @ 1% of FOB Price.

iii) Applicable Customs duties considering prevailing applicable Merit rate of Basic Custom duty or Basic Custom duty as per Multi-Lateral or Bi-lateral agreement etc., (if declared by bidder)] on CIF value.

iv) Custom clearance and Port Handling charges@ 2% of CIF value

v) Inland Freight (from Port of Entry (JNPT (Nhava Sheva Port)) to PLL Dahej project site) charges @ 2% of the aggregate cost at S. No. (i) to(iv).

vi) In case inspection is done by EIL, a notional loading @ 1% of FOB price towards inspection charges by EIL

vii) L/C charges @ 0.25% of FOB price.

Landed Cost at Project Site = S.No. (i) to (vii).

NOTE: Transit insurance for Indigenous and Foreign BIDDERs for transportation within India, will not be loaded (being in PLL scope).

12.4 GENERAL

12.4.1 Taxes and duties will be cost loaded as quoted by the bidder. However, if a SUPPLIER

states that taxes/duties are not applicable at present and will be charged as applicable at the time of delivery, then his bid shall be loaded by the maximum rate of taxes/duties applicable at the time of evaluation of Bids.

12.4.2 Notwithstanding anything mentioned elsewhere in the Bidding Document, the aggregate liability of Owner towards Payment of Taxes & Duties shall be limited to the volume of GST declared by the bidder in its bid & nothing shall be payable extra except for the statutory variation in taxes & duties & any other taxes & duties mentioned elsewhere in the bidding document.

12.4.3 In case the bidder is covered under Composition Scheme under GST laws, then bidder should quote the price inclusive of the GST (CGST & SGST/UTGST or IGST). Further, such bidder should mention “Cover under composition system” in column for GST (CGST & SGST/UTGST or IGST) of price schedule/proposal form.

12.4.4 In case of two different charges are indicated for additional services like freight, TPI etc. or charges are quoted in %age as well as lumpsum charges and both works out to be different, higher between the two shall be considered for evaluation. If the bidder happens to be L1 with the higher charges, lower value shall be considered for the award.

13 LOADING/REJECTIONCRITERIA

No loading criteria on account of commercial deviation will be applicable.

Bids shall be invited on Zero Deviation bidding basis. Deviation to terms & conditions to RFQ shall lead to rejection of offer.

14 TRANSFER OF PROPERTY FROM THE SELLER TO THE PURCHASER

The transfer of property shall be deemed to have taken place as follows subject to the provisions herein contained:

a) FOB/FCA/CFR Contracts: In the case of FOB/FCA, CFR & CIF Contracts, when the Goods have been put on board of ship, at the specified port of loading and a clean Bill of Lading / Airway Bill is obtained.

b) F.O.T. despatch point: On handing over the equipment to the carrier against receipt (LR) along with Inspection Release Note (IRN) and such document having been passed over to the Purchaser.

c) F.O.T. Project Site: on receipt of material at Project site.

d) Equipment sent freight/ carriage paid to the Project site: On receipt of goods at site.

e) Equipment erected by the Seller: on acceptance at job site.

f) Equipment commissioned by the Seller: On taking over by the Purchaser for regular operation after test run at maximum capacity for specified period satisfactorily performed.

15 FALL CLAUSE

Clause no. 28 of GCC applicable is case of NOMINATION AND PROPRIETARY AWARD.

16 PART ORDER

16.1 Bidder hereby agrees to accept part order at Purchasers option without any limitation whatsoever.

16.2 Any charges quoted extra as lumpsum shall be applicable prorata on value basis in the event of part order.

17 REPEAT ORDER

17.1 Repeat Order shall be as per clause no. 24 of GCC.

17.2 Non-Acceptance of Repeat Order conditions by bidder shall not be the reason for rejection

of bid.

18 DISPATCH NUMBER

18.1 In addition to the details furnished in the invoice, supplier shall generate DISPATCH NUMBER (DN) against each invoice. The DN shall be 3 digit continuous number starting from 001 suffixed to purchase Order Number and shall be unique to each invoice. Same shall also be printed on each consignment / box for easy co-relation. DN shall be quoted in all further communications viz dispatch detail to inspection, correspondence with site as well as for payment purpose. Mentioning the DN on each invoice shall be mandatory.

19 TERMS & CONDITIONS FOR SUPERVISION OF ERECTION, TESTING & COMMISSIONING / TRAINING AT SITE/HAZOP STUDY

19.1 Terms & conditions for supervision of erection, testing & commissioning / training at site shall be as per attached Annexure-III to SPC.

20 TERMS & CONDITIONS FOR INSTALLATION / SITE WORK

20.1 Terms & conditions for installation/ site work shall be as per attached Annexure-IV to SPC.

21 TERMS & CONDITIONS FOR ANNUAL MAINTENANCE CONTRACT (AMC)

21.1 Terms & conditions for Annual Maintenance Contract (AMC) shall be as per attached Annexure-V to SPC.

22 TERMS & CONDITIONS FOR TRAINING OF OWNER PERSONNEL AS PER MR AT VENDOR'S WORKS / TRAINING FACILITY

22.1 Terms & conditions for training of owner personnel as per MR at vendor's works/ training facility shall be as per attached Annexure-VI to SPC.

23 WARRANTY:

23.1 The Seller will guarantee that all materials and equipment shall be repaired or replaced as the case may be, at his own expense, in case the same have been found to be defective in respect of material, workmanship or smooth and rated operation within a period 12 months after the equipment/ material have been put in service or 24 months from the date of shipment, whichever is earlier. Repaired or replaced equipment/ materials shall be similarly guaranteed by the SELLER for a period of twelve (12) months from the date of replacement/ repair subject to a maximum of 24 months from the date, the main equipment/ material has been put in service. All expenses for such replacement/ repair of equipment/ material shall be to the account of the Seller including freight, if any."

24 RECOVERY OF SUMS DUE:

Clause No. 25 of GCC stands modified to the following extent:

The phrase *"(he is hereby irrevocably authorized to do so)"* stands DELETED

Annexure I to SCC

TERMS & CONDITIONS FOR INDIAN SOURCED COMPONENTS BY FOREIGN BIDDER

Foreign bidder may source components / sub-supplies and services from India, if allowed as per Material Requisition. For such sub-supplies / services, Commercial Terms & Conditions of the RFQ shall stand modified to the following extent:

1. PRICING:

1.1 Unit and total price on FOT Despatch Point basis including packing and forwarding charges.

1.2 Details of Taxes and duties (rates) payable extra on the finished goods, applicable on Indian sub- suppliers.

1.3 Separate and clear break-up of charges for inland transportation is to be quoted by the bidder.

1.4 Materials if ordered against the RFQ are required to be dispatched on door delivery basis.

1.5 Transit insurance of Indian sub supplies shall be borne and arranged by the PLL.

1.6 Indian counterpart of Foreign Bidder shall procure the items from EIL enlisted suppliers.

2. CURRENCY OF QUOTE:

The quoted price of sub-supplies shall be in Indian Rupees only.

3. AWARD OFORDER:

Foreign Principal shall be the single point responsible Vendor and separate order on foreign supplier and Indian sub-supplier / sub-contractor is not acceptable. Single Purchase order shall be issued on the foreign principal clearly indicating the sub-supplier's / sub-contractor's name, material and corresponding price in Indian Rupees.

4. DELIVERY:

The delivery period for sub-supplies shall be on FOT site basis within specified delivery period for foreign bidder as per Terms of RFQ/Bidding document.

5. PRICE REDUCTIONSCHEDULE:

PRS shall be applicable in totality on foreign scope + Indian sourced component / site work for delay in supply of goods/ site work either by foreign principals or Indian counterpart.

6. PAYMENTTERMS:

Payment of Indian sub supplies:

- 85% through E-Payment with taxes and duties will be paid against receipt of Indian sourced goods/material at Project Site.
- 10% against receipt of Indian supplies at site and delivery of main equipment by foreign bidder, as per Terms of bidding document and completion of site work, wherever applicable.
- 5% on submission of Final/As built Drawings/Documents/Data/Manual in requisite number of copies/sets/CDs as per VDR specified in Purchase Requisition, by main bidder.

Payment of Indian services:

- Shall be as per BDS.

Note:

- Payment of Indian sub supplies/Services shall be released directly to Indian counterpart against Invoices raised by Indian counterpart duly certified by foreign principal.
- In case of Foreign bids with Indian sub supplies, the payment terms of Foreign bidder against shipping documents stands reduced by 5% which shall be released as follows:

  5% payment shall be released thru wire transfer, on delivery of main equipment by foreign principal (as per terms of enquiry document) as well as receipt of Indian supplies at site.
- The payments shall be made after adjustment of Price Reduction Schedule.
- If foreign principal delivers all their foreign sourced goods with Indian sourced delivery yet to be completed and further requests for release of last 10% payment, then this last 10% shall be released to foreign principal by PLL against the submission of bank guarantee for this 10% of order value valid for 03 months from CDD plus 1 month claim period or till completion of Indian sourced items, whichever is later.

7. CONTRACT PERFORMANCE BANKGUARANTEE:

Foreign principal shall submit the Contract performance bank guarantee for 10% of Total Order Value including value of foreign portion and Indian sourced components / site work.

TAXES & DUTIES

Copyrights EIL – All rights reserved

A. Price basis w.r.t inclusion/exclusion of taxes and duties

1. The quoted price(s) shall be inclusive of all the taxes and duties except GST (i.e. IGST or CGST and SGST/UTGST applicable in case of interstate supply or intra state supply respectively) and GST compensation cess, (if applicable) leviable on sale of finished goods/services.
2. In case of foreign bidders, bidders shall submit their prices on FOB international sea port of exit basis/CFR on destination port basis (INCOTERM 2020), unless otherwise stated in the bid document. FOB/CFR prices quoted shall be inclusive of all applicable taxes up to FOB international sea port of exit/CFR on destination port basis.
3. Transportation charges (if applicable) up to respective project site shall be exclusive of GST.
4. Site work prices, if applicable shall be inclusive of all taxes and duties except GST. All necessary registrations, if required, for carrying out the site activities shall be done by the bidder and costs towards the same shall be included in quoted site work prices.
5. Prices of per diem supervision charges, training/AMC, HAZOP Study etc. (as applicable) shall be exclusive of GST. However, GST shall not be applicable on training provided at foreign bidder's work/training facilities in any territory other than India.

B. TAX CLAUSES

1. Goods and Services Tax

a. The supplier/contractor will be liable to register with the respective tax authorities and to submit self-attested copy of such registration certificates and the supplier/contractor will be responsible for procurement of goods/services in its own registration (GSTN).

b. Supplier/Contractor shall be required to issue tax invoice in the form and manner prescribed under GST Act read with Rules thereunder including E-Invoicing provisions so that input tax credit under GST can be availed by Owner. In the event that the supplier/contractor fails to provide the Tax Invoice/E-Invoice in the form and manner prescribed under the GST act read with GST invoicing rules thereunder, Owner shall not be liable to make any payment on account of GST against such invoice.

c. In case supplier/contractor is not subject to E-Invoicing provisions under the GST Laws as amended from time to time, then a declaration to this effect

Copyrights EIL – All rights reserved

shall be furnished by the supplier/contractor in format prescribed along with the Invoice.

d. GST shall be paid to supplier/contractor against receipt of Tax Invoice/E-Invoice and on auto-population of input tax credit on GSTN portal. In case of non-receipt of Tax Invoice/E-Invoice and/or non-auto-population of input tax credit on GSTN portal, Owner shall with hold the payment of GST.

e. The supplier/contractor shall always comply with the requirements of applicable laws and provide necessary documents as prescribed under the rules and regulations, as applicable from time to time. In particular, if any tax credit, refund or any other benefit Is denied/delayed to Owner or any interest/penalty is charged to Owner due to any non-compliance/ delayed compliance by the supplier/contractor under the GST Law (including but not limited to failure to upload the details of the sale on GSTN portal, failure to pay GST to the government or due to non-furnishing or furnishing of incorrect or incomplete documents, non-filing of GST return by the supplier/contractor), the supplier/contractor shall be liable to reimburse Owner for all such losses and other consequences including but not limited to the tax loss, interest and penalty. Owner shall be entitled to recover such amount from the supplier/contractor by way of adjustment from the next invoice, encashment of BG or by way of any other means either of same project or any other project of the Owner.

f. In case of any Advance including Mobilization/Secured/Other Advance is granted to supplier/contractor as per the provisions of Contract, then the supplier/contractor shall issue a Receipt Voucher / GST Invoice in the form and manner prescribed under GST Act read with Rules thereunder including e-invoicing provisions.

g. In case of any Price Variation as per the provisions of Contract, the supplier/contractor shall issue an Invoice in the form and manner prescribed under the GST Act read with Rules thereunder including e-invoicing provisions.

h. GST payable under reverse charge for specified services/goods under GST Act read with Rules thereunder, if any, shall not be paid to the supplier/contractor but will be directly deposited by Owner to the appropriate Government Tax Authority. If the same has already been reimbursed / paid to the supplier/contractor for any reason whatsoever, then Owner shall be entitled to deduct/set off /recover such amount against any amounts paid/payable by Owner to supplier/contractor.

Copyrights EIL – All rights reserved

i. Where Owner has the obligation to discharge GST liability under reverse charge mechanism and Owner has paid or is liable to pay GST to the government on which interest/penalty becomes payable as per GST law for any reason which is not attributable to Owner or Input Tax Credit w.r.t. such payment is not available to Owner for any reason which is not attributable to Owner, then Owner shall be entitled to deduct/set off /recover such amount against any amounts paid/payable by Owner to contractor/supplier.

j. TDS under GST, if applicable shall be deducted from supplier/contractor bills at applicable rates and a certificate as per rules for tax so deducted shall be provided to supplier/contractor.

k. The supplier/contractor will be under obligation for charging correct rate of tax as prescribed under the respective tax laws. Further the supplier/contractor shall avail and pass on benefits of all exemptions/concessions available under applicable tax laws.

l. In case bidder is covered under composition scheme under GST law, then bidder shall quote the price inclusive of GST. Further, such bidder should mention "Covered under GST Composition Scheme" in column for GST of relevant price schedule(s). In case subsequently such bidder gets covered under regular GST regime, the prices including GST under regular GST regime shall not exceed the prices quoted by the bidder under composition scheme.

m. Owner prefers to deal with registered supplier/contractor of goods/services under GST. Therefore, bidders are requested to get themselves registered under GST, If not registered yet. However, in case any unregistered bidder is submitting bid, their prices will be loaded with applicable GST while evaluation of bid as per evaluation methodology of tender document. However, where Owner is entitled for input credit of GST, the same will be considered for evaluation of bid as per evaluation methodology of tender document.

n. In case of foreign bidders, for supervision/site-work/training, services provided by foreign bidder at project site, GST shall be paid by Owner directly to appropriate Government Tax Authorities, under Reverse Charge Mechanism, if applicable and price of such services will be loaded with applicable GST while evaluation of bid as per clause E (Evaluation methodology).

o. Bidder will be required to quote applicable tax rate (along with applicable HSN/SAC Code) as per provisions of GST Laws for all the line items forming part of the enquiry. Any higher rate of tax actually invoiced in excess of

Copyrights EIL – All rights reserved

quoted rate of tax (except in compliance with provisions of Statutory Variation clauses) shall be adjusted in basic price.

p. In case of delay in supply/execution of contract, supplier/contractor shall be liable to raise invoices for reduced value as per Price Reduction Schedule (PRS) provision of the bidding document. In case the supplier/contractor raises invoices for full value, then supplier/contractor shall issue Credit Note, in the form and manner prescribed under relevant GST Act read with Rules thereunder, towards applicable PRS amount with applicable GST thereon.

In case supplier/contractor fails to submit invoices with reduced value or does not issue Credit Note as mentioned above, Owner shall release payment to the supplier/contractor after giving effect to the PRS clause with corresponding reduction in taxes from invoice(s) of supplier/contractor.

In case any financial implication arises on Owner due to issuance of invoice without reduction in prices or non-issuance of Credit Note by supplier/contractor, the same shall be to the account of supplier/contractor. Owner shall be entitled to recover the amount of such financial implication paid or becoming payable by Owner together with penalty and interest thereon, if any.

q. E-way bills shall be issued directly by supplier/contractor in all cases except in cases of direct imports by Owner where E-way bill shall be issued by Owner.

r. In case of applicability of any recovery as per provisions of the contract, Owner shall raise Invoice on supplier/contractor after charging GST at applicable rates as per prevailing provisions of GST Laws.

2. IMPORT DUTIES

a. Direct supplies by foreign suppliers where, client becomes consignee :
   i. Consignee shall be Owner, bill of entry shall be filed by Owner, all import duties, Social Welfare Surcharge, IGST and GST Compensation Cess etc. as applicable in India shall be paid by Owner.

b. Imported supplies by Indian suppliers as built in import content where Suppliers/Contractors will become consignee of the goods by filling Bill of Entry for Home consumption
   i. Custom duties, Social Welfare Surcharge, IGST, GST Compensation Cess, etc. as applicable in India on the imported materials shall be included in the quoted prices by the bidder (considering the input tax credit of IGST, GST Compensation Cess on imported material) and supplier/contractor shall be responsible for the timely payment of the

Copyrights EIL – All rights reserved

custom duties to the relevant government authority. All harbor dues/ pilotage fees, port fees, wharfage, unloading costs, demurrage charges etc. incurred in India in respect of any imported goods shall be to supplier's/contractor's account.

ii. Bidder to indicate, in relevant price schedule, CIF value of built-in import content and applicable merit rate of custom duty, Social Welfare Surcharge on custom duty (considering the input tax credit of IGST, GST Compensation Cess on imported material) included in quoted price, in the price schedule.

iii. In case merit rate of custom duty is applicable and bids are invited on the basis of same, however at a later stage concessional rate of custom duty becomes applicable, concessional certificate shall be issued towards import of material against the advance request letter submitted by the domestic bidder and the differential custom duties between concessional rate and quoted merit rate of custom duty by supplier/contractor shall be passed on to the Owner or it shall be recovered by the Owner from the supplier/contractor's invoice.

iv. The supplier/contractor shall be responsible for and shall exercise due diligence in properly classifying the goods and materials, undertaking the payment of custom duties, and/or otherwise complying with all applicable laws w.r.t. import of the goods and materials.

v. If bidder does not furnish built in CIF value and rates of custom duty, in that case bidder shall not be entitled to claim any variation in the custom duties even if bidder has quoted their prices considering custom duties.

vi. If custom duty rate actually paid on import of materials and components is found to be lower than the quoted rate of custom duty, then benefit of the same shall be passed on to the Owner.

vii. If bidder has considered Import Duty other than Merit Rate of Import Duty then statutory variation on the Import Duty shall be payable extra on the Merit Rate of Import Duty or the rate of Import Duty considered by the bidder, whichever is lower.

viii. In case, no import is made for execution of the order, clauses related to Imports will not be applicable.

c. General points:

i. In case Owner is exposed to any penal action, interest /penalties by the custom authorities for incorrect declaration and / or valuation of the goods or material by the supplier/contractor, or otherwise on account of any breach of applicable laws in the course of the import of the goods and material by supplier/contractor, the supplier/contractor shall indemnify and hold harmless the Owner for any and all costs, expenses or losses suffered or incurred by Owner in this regard

Copyrights EIL – All rights reserved

ii. If bidder intends to source import of goods from a country with which India has Free Trade Agreement (FTA) or Comprehensive Economic Partnership Agreement (CEPA) or any such multi-lateral / bi-lateral Agreement or Treaty with India or under Generalized System of Preference (GSP); or under any other notification (allowing lower rate of custom duty), then the bidder is advised to ascertain and confirm its applicability along with supporting documents in the bid and ensure that conditions of such agreement/treaty etc. are strictly complied with.

iii. The bidder shall be liable to provide all documentation to ensure availment of the exemption/waiver. In case the bidder defaults on this due to any reason, whatsoever, he shall be liable to bear the incremental custom duty applicable if any

iv. Any additional custom duty applicability on account of any change in the notification (allowing lower rate of custom duty)/ CEPA/FTA/multi-lateral/bi-lateral trade agreement shall be to bidder's account.

v. Documentation to be furnished for availing the exemption /waiver of custom duty shall be specifically listed in the letter of credit also as a prerequisite for release of payment against shipping documents and this documentation shall necessarily form a part of shipping documents.

vi. Owner will not bear any liability towards payment of Safeguard Duty, Anti-Dumping Duty, Protective Duty and applicable IGST including GST Cess on same or Countervailing Duty on subsidized articles or any other such duties of Customs imposed by Government under Customs Tariff Act, 1975.

vii. In case custom duty rate as quoted by Foreign bidder is less than Actual rate applicable on due date of submission of last price bid and payment of custom duty is on Owner's Account, differential amount on account of above-mentioned rate variation will be recovered from Foreign bidder.

3. INCOME TAX

a. Foreign supervisors/suppliers/contractors

Prices of site work, contracts and other services of foreign supplier/contractor shall be gross of income tax i.e., inclusive of Indian

Copyrights EIL – All rights reserved

income tax at the applicable prevailing rate as per Indian Income Tax Act and Rules there under.

Owner shall deduct withholding tax at source (TDS) as applicable while making payments against each invoice. Certificate for TDS shall be provided to the supplier/contractor.

In case foreign bidder quotes Prices of site work, contracts and other services "net of Income Tax" i.e., exclusive of Indian income tax, Owner shall deduct and deposit TDS as applicable after grossing up the sums due while making payments against each invoice at the applicable prevailing rate as per Indian Income Tax Act and Rules thereunder.

Foreign bidder shall furnish the information required in line with the prevalent provisions of Income tax act read with rules thereunder including but not limited to Tax residency certificate, Form 10F, No permanent establishment declaration, No business connection certificate, PAN in India if available.

Failing to provide above documents/information, tax will be withheld at rates applicable as per the provisions of Income Tax Act, 1961 read with rules thereunder and the benefit of reduced rates will not be given.

If the non-resident is unable to obtain & submit Tax Residency Certificate to the Owner within a reasonable time, the bidder should furnish Form 10F along with an undertaking to the effect that the bidder is a tax resident of (the specified country) and that they shall obtain and provide the tax residency certificate (TRC) to the Owner before 30 days of submission of first Invoice by them or within 3 months from the date of entering into contract whichever is earlier.

In case of contracts with term exceeding one financial year, the relevant documents like TRC, Form 10 F, No PE / Business Connection Certificate etc. as applicable, as per Income Tax Act, 1961 must be submitted at the beginning of each financial year and the Owner will not bear additional tax liability (if any) arising from non-submission of documents.

The bidder shall be liable to intimate the subsequent changes (if any) to the information submitted against any of the above particulars, along with full details.

In addition to the above particulars, the bidder should also provide any other information as may be required at a later stage for determining the taxability of the amount to be remitted to the non-residents.

Copyrights EIL – All rights reserved

In case, any additional tax liability arises on the Owner due to any action of bidder like delay in submission / non-submission of information / documents required as above or change in residential status post submission of documents or change in any document (like TRC, Form 10F etc.) after its submission shall be recovered from the supplier/contractor.

b. Indian resident supervisors/ suppliers/contractors

Prices for supply and services of Indian suppliers/ contractors shall be inclusive of income tax.

Tax shall be deducted at source (TDS) by Owner on all sums due to supplier/contractor in accordance with the provisions of Indian Income Tax act read with rules thereunder as in force at the relevant point of time.

Owner shall issue a Tax Deduction Certificate to the supplier/contractor evidencing the tax deducted or withheld and deposited by Owner on payments made to the supplier/contractor to enable the supplier/contractor to claim the credit of Tax deducted by Owner.

c. INCOME TAX (General Points):-

i. The supplier/contractor shall also be responsible for ensuring compliance with all applicable provisions of the Direct Tax Laws of India including, but not limited to, the filing of relevant Tax Returns and shall promptly provide all information required by the Owner for discharging any of its responsibilities/liabilities under such laws in relation to or arising out of the Contract. For the lapses/failure, if any, on the part of the supplier/contractor and consequential penal action taken by the Income Tax department, Owner shall not take any responsibility whether financial or otherwise and shall be indemnified by the supplier/contractor.

ii. The Indian Income Tax Act and Rules made thereunder contains provisions permitting deduction of tax at source (TDS) at lesser rate if the supplier/contractor is able to justify to the Income Tax Authorities such lesser rate of deduction. However, a deduction once made has to be deposited by the Owner with the Income Tax Authorities in India and will not be adjustable by the Owner. It is therefore in the interest of the supplier/contractor that prior to release of any payment due to the supplier/contractor under the Contract that the supplier/contractor obtains from the relevant Income Tax Authorities in India, a certificate specifying the rate of deduction/withholding of Income tax at source, failing which, payment to the

Copyrights EIL – All rights reserved

supplier/contractor shall be made by the Owner after withholding/deduction at the rate as may be applicable to the supplier/contractor as per provisions of Income Tax Act, 1961.

iii. TDS on interest recovered on Mobilization/Other Advance will be deposited by the supplier/contractor and same would be reimbursed by the Owner against submission of Form-16A (TDS certificate).

C. INVOICING METHODOLOGY W.R.T. TAXATION

following invoicing methodology shall be applicable:

1. In case of domestic / foreign PO's (Other than 2 below) , Invoice/E-Invoice shall be raised by the supplier/contractor in the name of Owner and consignee shall be Owner.
2. In case of package MR's (where title transfer or take over is envisaged to take place at site after completion of site work) and tenders, supplier/contractor shall bring material at project site in their own name and they themselves shall be consignee. As per provisions of contract between Owner and supplier/contractor, Invoice/E-Invoice shall be raised by supplier/contractor to Owner after charging GST.

D. APPLICABILITY OF TAX CREDIT

GST input credit is available to Owner.

E. EVALUATION METHODOLOGY W.R.T. TAXES

Following shall be loaded for evaluation:

1. Applicable Custom Duty, Social Welfare Surcharge etc, (excluding IGST & GST Compensation Cess (if applicable) on imported material which shall be dealt as per bid evaluation methodology given in E2 below) shall be loaded for price bid evaluation in respect of supplies for which bill of entry has to be filled by Owner.
2. GST on which input credit is not available to Owner including GST Compensation Cess (if applicable).
3. Applicable Income tax, in case foreign bidder quotes prices net of taxes.

F. TAXATION TERMS FOR INDIAN SOURCED SUPPLIES (Applicable in case of foreign supplier)

Shall be the same as applicable for Indian bidders.

G. TAX IMPLICATION WHERE FABRICATION YARD IS OUTSIDE THE FACTORY PREMISES, WHEREVER APPLICABLE

Copyrights EIL – All rights reserved

In case of package MRs and tenders, since contractors/suppliers shall bring material at project site in their own name and raise invoice to Owner (as per payment milestone achieved) after charging GST, location of fabrication yard whether inside or outside factory premises will not attract any additional liability.

H. TAX IMPLICATION WHERE OWNER WILL ISSUE FREE ISSUE MATERIAL (FIM) TO CONTRACTORS/SUPPLIERS

Where Owner issues FIM's to suppliers/contractors, material will be released against delivery challan and such FIM shall be received back in factory premises as per provision of GST.

I. STATUTORY VARIATION

No variation on account of taxes and duties, statutory or otherwise, shall be payable to Supplier/Contractor except for the following:

1. GST: If after the due date of submission of last price bid and up to the contractual delivery/completion period (*Note 4), any increase/decrease occurs in the applicable rate of GST, the variation in such GST shall be to Owner's account and shall be adjusted (increase / decrease) to / from the Supplier's/Contractor's invoices based on the documentary evidence.

   Any increase in GST after the contractual delivery/completion period (*Note 4) shall be to Supplier's/Contractor's account. However, any decrease in the rate of GST shall be passed on to Owner.

   For calculating Statutory Variations ceiling amount as declared by the Bidder in price schedule shall only be considered.

2. Basic Custom Duty (BCD) & Social Welfare Surcharge (SWS): If after the due date of submission of last price bid and upto the XX (*Note-3) of contractual delivery/completion period (*Note 4), any increase/decrease occurs in the applicable rate of BCD & SWS on materials imported, the variation in such BCD & SWS shall be to Owner's account and shall be adjusted (increase/decrease) to/from the Supplier's/Contractor's invoices based on the documentary evidence.

   Any increase in rate of BCD & SWS on materials imported after the XX (*Note-3) of the contractual delivery/completion period (*Note 4) shall be to Supplier's/Contractor's account. However, any decrease in the rate of BCS & SWS on materials imported shall be passed on to Owner.

   For calculating Statutory Variations in BCD/SWS, ceiling amount of CIF Value and rate of custom duty as declared by the Bidder in relevant price schedule shall only be considered.

Note: Indian supplier/contractor to consider input tax credit of IGST and GST Compensation Cess if any (in case of import of raw Materials / components)

Copyrights EIL – All rights reserved

in their quoted prices. Hence, Statutory variations on same in case of imported materials from outside India in Supplier's/Contractor's name (i.e., for Indian Bidders) shall be to Supplier/Contractor account.

3. Any new output taxes, duties, cess, levies notified or imposed after the due date of submission of last price bid but upto the contractual date of delivery/completion (*Note 4) shall be to Owner's account. These shall be reimbursed against documentary evidence. However, in case of delay attributable to supplier/contractor, any new output taxes, duties, cess, levies notified or imposed after Time for Completion, defined as above, shall be to supplier's/Contractor's account.

J. TAX INDEMNITY

Any omission/ errors of interpretation of applicability of taxes, duties, cesses and levies, whatsoever named, howsoever named, as are payable to any government, local or statutory authority in India or in any country other than India by the supplier/contractor shall be to supplier's/contractor's account.

If any fine/penalty/any other levy is required to be met by the Owner arising out of any non-compliance/fault/fraud/willful suppression/misstatement of facts/information/documents, whatsoever, of any applicable laws of India or any country other than India by the supplier/contractor/their personnel/sub-contractors/agencies, the same shall be recovered from any amount payable to the supplier/contractor under this contract or under any other contract of the Owner.

If any tax is paid / required to be paid by supplier/contractor in pursuance of any demand of any law enforcement agency/Tax Authority on account of non-compliance/fault/fraud/willful suppression/misstatement of facts/information/documents, whatsoever, of any applicable laws of India or any country other than India by the supplier/contractor/their personnel/sub-contractors/agencies, the same shall be to supplier's/contractor's account only.

GENERAL:

1. *Note-1 : Deleted.
2. *Note-2 : Deleted
3. *Note-3 Time period shall be till the **Contractual Completion/Delivery period.**
4. *Note-4 Contractual delivery/completion period shall include extended contractual delivery/completion period for the reasons attributable to Owner or due to Force Majeure condition.

Copyrights EIL – All rights reserved

Copyrights EIL – All rights reserved

FORM OF ADVANCE BANK GUARANTEE
(ON NON-JUDICIAL PAPER OF APPROPRIATE VALUE)

To,
Petronet LNG Limited
4th Floor, Tower-I, World Trade Center
Nauroji Nagar
New Delhi – 110029
Subject: Bank Guarantee No. _____ dated:

WHEREAS, _____(Contractor / Vendor/ Supplier Name) a company incorporated under _____ (Act) having its registered office at _____(hereinafter referred to as the "Contractor"/ "Vendor"/ "Supplier" which expression shall unless repugnant to the context or meaning thereof include its successors and permitted assigns) has been issued _____ (LOA/order No.), by M/s Petronet LNG Limited having its registered office at 4th Floor, Tower -I, World Trade Center, Nauroji Nagar, New Delhi - 110 029 (hereinafter referred to as the "Owner" which expression shall unless repugnant to the context or meaning thereof include its successors and assigns) for carrying out / supplying _____ (subject), for Owner, and further the parties shall enter into an agreement to execute the scope of work under this LOA/Purchase Order (such agreement shall hereinafter be referred as "Contract").

WHEREAS as per the _____ (Contract/LOA No/ Purchase Order.) the Contractor/Supplier is obliged to furnish to the PLL an irrevocable, unconditional, payable on first demand, bank guarantee issued by specified financial institutions acceptable to the PLL, as mentioned in the said Contract/LOA No. for the advance claimed by the Contractor / Supplier of the Contract.

AND WHEREAS the Bank (as defined herein below) has affirmed that it is one of the scheduled bank and at the request of the Contractor and for sufficient consideration, the Bank has agreed to issue this advance bank guarantee in favor of the PLL.

AND WHEREAS _____ (Bank Name) having its registered office at _____ and a branch office at _____ (insert name of city in India) India, hereinafter referred to as the "Bank" (which expression shall unless repugnant to the context or meaning thereof be deemed to mean and include its successors), being Acceptable Bank (*refer Sl No. 2 of Instructions for furnishing Bank Guarantee for Criteria of acceptable bank*), has at the request of the Contractor / supplier / Surety agreed to issue this advance bank guarantee in favour of the PLL.

NOW THEREFORE, the Bank hereby undertakes the pecuniary responsibility of the Contractor to the PLL for the due performance of the Contract and for the payment of any money by the Contractor / supplier to the PLL and hereby issues in favour of the PLL this on demand, irrevocable and unconditional and payment bank guarantee (hereinafter referred to as the "Guarantee") on behalf of the Contractor / supplier in the amount of Indian Rupees _____ [*amount claimed for advance for procurement and 110% of advance amount claimed for works , service , consulting contracts*].

The Bank for the purpose hereof unconditionally and irrevocably undertakes to pay to the PLL without any demur, reservation, cavil, protest or recourse; immediately on receipt of first written demand from the PLL, any sum or sums (by way of one or more claims) not exceeding in the aggregate the amount of Indian Rupees_____ (insert an amount) without the PLL requiring to furnish proof or to show / justify to the Bank any ground(s) or reason(s) for such demand for the sum specified therein and notwithstanding any dispute or difference between the PLL and the Contractor in respect of the performance of the Contract or moneys payable by Contractor to the PLL or any matter whatsoever related thereto.

The Bank acknowledges that any such demand by the PLL of the amounts payable by the Bank to the PLL shall be final, binding and conclusive evidence in respect of the amounts payable by the Contractor / supplier to the PLL.

The Bank hereby waives the necessity for the PLL from demanding the aforesaid amount or any part thereof from the Contractor / supplier before enforcement of this Guarantee and also waives any right that the Bank may have of first requiring the PLL to pursue its legal remedies against the Contractor / supplier, before presenting any written demand to the Bank before enforcement / making payment under this Guarantee.

The Bank's obligations under this Guarantee shall not be reduced by reason of any partial performance of the Contract. The Bank's obligations shall not be reduced by any failure by PLL to timely pay or perform any of its obligation(s) under the Contract.

Any payment made hereunder shall be made free and clear of and without deduction for, or on account of, any present or future taxes, levies, imposts, duties, charges, fees, commissions, deductions or withholdings of any nature whatsoever provided always nothing herein contained will enlarge our liability hereunder beyond the limit of _____ (*amount claimed for advance for procurement and 110% of advance amount claimed for works service , consulting contracts*)

This Guarantee shall be a continuing bank guarantee until its expiry, i.e. _____ and shall not be discharged by the change in constitution of any member of the Contractor and the Guarantee shall not be affected or discharged by the liquidation, winding up, bankruptcy, re organization, dissolution or insolvency of any member of the Contractor or any other circumstances whatsoever.

This Guarantee shall be in addition to and not in substitution or in derogation of any other security held by the PLL to secure the performance of the obligations of the Contractor under the Contract.
The Bank agrees that the PLL at its option shall be entitled to enforce this Guarantee against the surety, as a principal debtor in the first instance without proceeding at the first instance against the Contractor / Contractor.

Without prejudice to any continuing liability to perform obligations under this Guarantee which have arisen prior thereto, the Bank shall be released from any further obligations arising hereunder after_____.

This Guarantee shall not be assigned or transferred by the Bank.

This Guarantee is subject to the laws of India. Any suit, action, or other proceeding arising out of this Guarantee or the subject matter hereof shall be subject to the exclusive jurisdiction of courts of New Delhi, India. This guarantee is to be returned to the Bank immediately on expiry of the claim period. If the Bank does not receive the bank guarantee latest by the expiry of the claim period, it shall be deemed to be automatically cancelled.

The Bank has the power to issue this Guarantee in favour of the PLL. The aggregate liability of the Bank under this Guarantee shall not under any circumstance exceed Indian Rupees_____ (insert an amount)

In witness whereof the Bank, through its authorized officer, has set its hand and stamp on this_____ day of _____

Notwithstanding anything contained hereinabove:
I. Our liability under the bank guarantee shall not exceed Rs.____
II. The bank guarantee shall be valid upto _____ (30 days plus Contractual delivery date / 30 days plus Contractual Completion date.)

III. The beneficiary's right as well the Bank's liability under this guarantee shall stand extinguished unless a written claim or demand is made under this Guarantee on or before___ (6 months after ABG expiry date) .

_____

(Signature)
Name

_____
Designation with Stamp
Duly authorized representative
Vide power of attorney No. ____
Dated _____
Witness

_____
(On stamp paper of requisite value)

INSTRUCTIONS FOR FURNISHING BANK GUARANTEE

1. Bank Guarantee by Indian Bidders will be given on non-judicial stamp paper as per stamp duty applicable in State of New Delhi. The non-judicial stamp paper should be in name of the issuing bank.

2. **The Advance Bank Guarantee shall be accepted only when issued from a bank fulfilling the criteria of the "Acceptable Bank" as mentioned in Bid Data Sheet (BDS).**

3. The validity of Advance Bank Guarantee shall be 30 days plus Contractual delivery date / 30 days plus Contractual Completion date.

4. Claim Period shall be 06 months beyond BG expiry date.

Request Letter: Transmission of Bank Guarantee Cover Message <to be submitted by Bidder to BG issuing bank>

Date: _____
The Manager,
(Bank),
(Branch)
Sub: Inclusion of unique identifier while transmitting BG cover messages where beneficiary bank is ICICI Bank India

Dear Sir/Ma'am,
I/We, _____, request you to include unique identifier **PLNG574440489 in field 7037** of the SFMS cover messages IFN COV 760 (for BG issuance) and IFN COV 767 (for BG amendment) while transmitting the same to the beneficiary bank (ICICI Bank, IFSC: ICIC00000007). This is required by Petronet LNG Limited as per their tender/contract requirement.

Thanking You,_____

The Template for MT 760-COV (SFMS) for issuing bank is mentioned below:

{
:7020:
:7022:
:7024:ADVANCE
:7025:INRxxxxx
:7026:
:7027:<Date of Issue>
:7029:<Expiry date>
:7030:<Place of Claim Lodgement>
:7031:<Issuing Bank IFSC>
:7032:<Issuing Bank Name>
:7033:<Applicant Name>
:7034:PETRONET LNG LIMITED <Address>
:7035:ICIC0000007
:7036:ICICI BANK LIMITED
:7037:PLNG574440489
-}

PERFORMANCE BANK GUARANTEE
(ON NON-JUDICIAL PAPER OF APPROPRIATE VALUE)

To,
Petronet LNG Limited
4th Floor, Tower-I, World Trade Center
Nauroji Nagar
New Delhi – 110029

Subject : Bank Guarantee No. _____

WHEREAS, _____ *(Contractor / Vendor/ Supplier Name)* a company incorporated under _____ having its registered office at _____(hereinafter referred to as the *"Contractor"/ "Vendor"/ "Supplier"* which expression shall unless repugnant to the context or meaning thereof include its successors and permitted assigns) has been issued _____, by M/s Petronet LNG Limited having its registered office at 4th Floor, Tower -I, World Trade Center, Nauroji Nagar, New Delhi - 110 029 (hereinafter referred to as the "Owner" which expression shall unless repugnant to the context or meaning thereof include its successors and assigns) for carrying out _____, for Owner, and further the parties shall enter into an agreement to execute the scope of work under this LOA (such agreement shall hereinafter be referred as "Contract").

WHEREAS as per _____ (*Contract/LOA No/ Purchase Order No.*) the Contractor / Supplier is obliged to furnish to the Owner an irrevocable, unconditional, first demand bank guarantee issued by specified financial institutions acceptable to the Owner, for a sum equal to 10% (ten percent) of the Contract Price for the due performance by the Contractor / Supplier of the Contract/ PO.

AND WHEREAS the Bank (as defined herein below) has affirmed that it is one of the scheduled bank and at the request of the Contractor and for sufficient consideration, the Bank has agreed to issue this performance bank guarantee in favor of the Owner.

AND WHEREAS _____ (*Bank Name*) having its head office at _____ and Branch office at _____ (insert name of city in India) India, hereinafter referred to as the "Bank" (which expression shall unless repugnant to the context or meaning thereof be deemed to mean and include its successors), being acceptable Bank (*refer Sl No. 2 of Instructions for furnishing Bank Guarantee for Criteria of Acceptable bank mentioned below*), has at the request of the Contractor / supplier / Surety agreed to issue this performance bank guarantee in favour of the Owner.

NOW THEREFORE, the Bank hereby undertakes the pecuniary responsibility of the Contractor to the Owner for the due performance of the Contract and for the payment of any money by the Contractor/ Supplier to the Owner and hereby issues in favour of the Owner this on demand, irrevocable and unconditional performance and payment bank guarantee (hereinafter referred to as the "Guarantee") on behalf of the Contractor / supplier in the amount of Indian Rupees _____ (*insert an amount equal to ten percent (10%) of the Contract Price/ estimated Contract Price*).

The Bank for the purpose hereof unconditionally and irrevocably undertakes to pay to the Owner without any demur, reservation, cavil, protest or recourse; immediately on receipt of first written demand from the Owner, any sum or sums (by way of one or more claims) not exceeding in the aggregate the amount of Indian Rupees _____(*insert an amount equal to ten percent (10%) of the Contract Price/ estimated Contract Price*) without the Owner requiring to furnish proof or to show / justify to the Bank any ground(s) or reason(s) for such demand for the sum specified therein and notwithstanding any dispute or difference between the Owner and the Contractor in respect of the performance of the Contract or moneys payable by Contractor to the Owner or any matter whatsoever related thereto.

The Bank acknowledges that any such demand by the Owner of the amounts payable by the Bank to the Owner shall be final, binding and conclusive evidence in respect of the amounts payable by the Contractor / supplier to the Owner.

The Bank hereby waives the necessity for the PLL from demanding the aforesaid amount or any part thereof from the Contractor / supplier before enforcement of this Guarantee and also waives any right that the Bank may have of first requiring the PLL to pursue its legal remedies against the Contractor / supplier, before presenting any written demand to the Bank before enforcement / making payment under this Guarantee.

The Bank further unconditionally agrees with the Owner that the Owner shall be at liberty, without the Bank's consent and without affecting in any manner the Bank's obligation under this Guarantee, from time to time, to:

(i) vary and/or modify any of the terms and conditions of the LOA/Contract,
(ii) extend and/or postpone the time for performance of the obligations of the Contractor under the LOA/Contract, or
(iii) forbear or enforce any of the rights exercisable by the Owner against the Contractor under the terms and conditions of the Contract

and the Bank shall not be relieved from its liability by reason of any such act or omission on the part of the Owner or any indulgence by the Owner to the Contractor or other thing whatsoever which under the law relating to sureties would, but for this provision, have the effect of relieving the Bank of its obligations under this Guarantee.

The Bank's obligations under this Guarantee shall not be reduced by reason of any partial performance of the Contract. The Bank's obligations shall not be reduced by any failure by Owner to timely pay or perform any of its obligations under the Contract.

Any payment made hereunder shall be made free and clear of and without deduction for, or on account of, any present or future taxes, levies, imposts, duties, charges, fees, commissions, deductions or withholdings of any nature whatsoever and by whomever imposed; and where any withholding on a payment is required by law, the Bank shall comply with such withholding obligations and shall pay such additional amount in respect of such payment such that Owner receives the full amount due hereunder as if no such withholding had occurred.

This Guarantee shall be a continuing bank guarantee until its expiry, i.e. _____and shall not be discharged by the change in constitution of any member of the Contractor and the Guarantee shall not be affected or discharged by the liquidation, winding up, bankruptcy, reorganization, dissolution or insolvency of any member of the Contractor or any other circumstances whatsoever.

This Guarantee shall be in addition to and not in substitution or in derogation of any other security held by the Owner to secure the performance of the obligations of the Contractor under the Contract.

The Bank agrees that the Owner at its option shall be entitled to enforce this Guarantee against the surety, as a principal debtor in the first instance without proceeding at the first instance against the Contractor.

Without prejudice to any continuing liability to perform obligations under this Guarantee which have arisen prior thereto, the Bank shall be released from any further obligations arising hereunder after_____(validity of the guarantee)

This Guarantee shall not be assigned or transferred by the Bank.
This Guarantee is subject to the laws of India. Any suit, action, or other proceeding arising out of this Guarantee or the subject matter hereof shall be subject to the exclusive jurisdiction of courts of New Delhi, India.

The Bank has the power to issue this Guarantee in favour of the Owner. The aggregate liability of the Bank under this Guarantee shall not under any circumstance exceed Indian Rupees _____ (*insert an amount equal to ten percent (10%) of the Contract Price/ estimated Contract Price*).
Capitalised terms not otherwise defined herein shall have their respective meanings given such terms set forth in the Contract.

In witness whereof the Bank, through its authorised officer, has set its hand and stamp on this _____ day of _____
Notwithstanding anything contained hereinabove:

I. Our liability under the bank guarantee shall not exceed Rs._____
II. The bank guarantee shall be valid upto _____
III. The beneficiary's right as well the Bank's liability under this guarantee shall stand extinguished unless a written claim or demand is made under this Guarantee on or before___(6 months after BG expiry date) .

(Signature)
Name_____
Designation with Stamp
Duly authorised representative
Vide power of attorney No. ____
Dated _____
Witness.
_____

INSTRUCTIONS FOR FURNISHING BANK GUARANTEE

1. Bank Guarantee by Indian Bidders will be given on non-judicial stamp paper as per stamp duty applicable in State of New Delhi. The non-judicial stamp paper should be in name of the issuing bank.

1. **The Performance Bank Guarantee shall be accepted only when issued from a bank fulfilling the criteria of the "Acceptable Bank" as mentioned in Bid Data Sheet (BDS).**

2. The expiry date should be arrived at by adding 90 days to the Contract completion / Delivery date plus warrantee/guarantee/defect liability period (if any) as specified in the bidding documents.

3. Claim Period shall be 06 months beyond BG expiry date.

Request Letter: Transmission of Bank Guarantee Cover Message <to be submitted by Bidder to BG issuing bank>

Date: _____
The Manager,
(Bank),
(Branch)
Sub: Inclusion of unique identifier while transmitting BG cover messages where beneficiary bank is ICICI Bank India

Dear Sir/Ma'am,
I/We, _____, request you to include unique identifier PLNG574440489 in field 7037 of the SFMS cover messages IFN COV 760 (for BG issuance) and IFN COV 767 (for BG amendment) while transmitting the same to the beneficiary bank (ICICI Bank, IFSC: ICIC00000007). This is required by Petronet LNG Limited as per their tender/contract requirement.

Thanking You,

_____

The Template for MT 760-COV (SFMS) for issuing bank is mentioned below:

{
:7020:
:7022:
:7024:PERFORMANCE
:7025:INRxxxxx
:7026:
:7027:<Date of Issue>
:7029:<Expiry date>
:7030:<Place of Claim Lodgement>
:7031:<Issuing Bank IFSC>
:7032:<Issuing Bank Name>
:7033:<Applicant Name>
:7034:PETRONET LNG LIMITED <Address>
:7035:ICIC0000007
:7036:ICICI BANK LIMITED
:7037:PLNG574440489
-}

PROFORMA OF SURETY BOND FOR CONTRACT PERFORMANCE SECURITY

(To be executed on non-judicial stamp paper of appropriate value)

Ref..... Guarantee No.....

To,

Petronet LNG Limited
4th Floor, Tower-I, World Trade Center
Nauroji Nagar
New Delhi – 110029

Dear Sir (s),

In consideration of you, Petronet LNG Limited a Company duly incorporated and executing under the laws of India having its office at 04th , 05th and 06th Floor, Tower -I, World Trade Center, Nauroji Nagar, New Delhi - 110 029 (hereinafter referred to as the **"PLL"**, which expression shall unless it be repugnant to the subject or context thereof include its successors and assigns) having awarded the Contract to [***insert name of the Contractor***] having its registered office at [***insert address of the Contractor***] (hereinafter referred to as the "**Contractor**", which expression shall unless it be repugnant to the subject or context thereof include its/their executors, administrators, successors and assigns) in relation to [***insert Contract Name/Work Description***] pursuant to the Contract Agreement bearing Reference Number [***insert reference number***] (hereinafter collectively referred to as "**Contract Documents**"), we [***insert name of the Insurer***] having our registered office at [***insert registered address of the Guarantor***] and one of its branch at [***insert relevant branch address of the Insurer***], at the request of the Contractor, do hereby irrevocably, unconditionally, and without reservation guarantee the due and faithful performance, discharge and compliance of all the terms, conditions, and obligations under the Contract Documents by the said Contractor and unconditionally undertake to pay to PLL forthwith on first demand without any demur, reservation, recourse, contest, protest, or requiring proof of satisfaction or condition, and without reference to the Contractor, an amount of **INR** _____ **(Rupees** _____ **only)[** ***insert Guarantee Amount]*** (hereinafter referred to as the "**Guaranteed Amount**") as our primary obligation under this Insurance Bond. Any such demand made by PLL on the insurer shall be conclusive, binding and notwithstanding any difference between PLL and the Contractor or any dispute pending before any court, tribunal or any other authority. .

NOW, THEREFORE, the Insurer hereby unconditionally and irrevocably guarantees and affirms as follows:

1. This Insurance Bond (**"Performance Guarantee"**) shall be a continuing guarantee and shall remain in full force and effect till all claims or demands made by the PLL on the Insurer **("Guarantor")** are realised and/or until the PLL discharges this Bond, subject however that the PLL shall have no claims under this Guarantee after [***insert time and date including at least 03 (three) months beyond the defect liability period, plus six months' claim period***] or any written extension(s) thereof.

2. In order to give full effect to this Bond, PLL shall be entitled to treat the Insurer **("Guarantor")** as the Principal Debtor. PLL shall have the fullest liberty without affecting in any way the liability of the Insurer under this Bond / Guarantee from time to time or to vary any of the terms and conditions contained in the said Contract Documents or to extend time for performance of the

Contract or the validity period of the Performance Guarantee or the period for compliance with any obligations by the Contractor or to postpone for any time and from time to time any of the powers exercisable by PLL against the said Contractor and either to enforce or forbear from enforcing any of the terms and conditions contained in the said Contract Documents or the securities available to PLL, and the Guarantor shall not be released from its liability under these presents by any exercise by PLL of the liberty with reference to the matters aforesaid or by reason of time being given to the said Contractor or any other forbearance, act or omission on the part of PLL or any indulgence by PLL to the said Contractor or by any change in the constitution of PLL or its absorption, merger or amalgamation with any other person or any other matter or thing, whatsoever, which under the law relating to Guarantee would but for this provision have the effect of releasing the Guarantor from its such liability.

3. It shall not be necessary for the PLL to proceed against the Contractor before proceeding against the Guarantor and the Guarantee herein contained shall be enforceable against the Insurer / Guarantor as the Principal Debtor notwithstanding the existence of any other undertaking or security for any indebtedness of the Contractor to the PLL and notwithstanding that any such security shall at the time when claim is made against the Guarantor or proceedings taken against the Guarantor hereunder, be outstanding or unrealized.

4. The amount stated by the PLL in any demand, claim or notice if made with reference to this Insurance Bond shall as between the Guarantor and the PLL which shall be final, conclusive and binding with regard to the amount payable by the Guarantor to the PLL hereunder.

5. The liability of the Insurer / Guarantor to PLL under this Guarantee shall remain in full force and effect notwithstanding the existence of any difference or dispute between the Contractor and the PLL, the Contractor and the Guarantor and/or the Guarantor and the PLL or otherwise, howsoever, related to this Insurance Bond or Guarantee or the liability of the Contractor to the PLL, and notwithstanding the existence of any instructions or purported instructions by the Contractor or any other person to the Guarantor not to pay or for any cause withhold or defer payment to the PLL under this Insurance bond / Guarantee, with the intent that notwithstanding the existing of such difference, dispute or instructions, the Guarantor shall be and remain liable to make payment to the PLL in terms thereof.

6. We, the Guarantor, further agree that PLL shall be the sole judge to decide as to whether the Contractor is in default of due and faithful fulfilment and compliance with the terms and conditions contained in the aforesaid Contract Documents and the decision of PLL that the Contractor is in default as aforesaid shall be final and binding on us, notwithstanding any differences between PLL and the Contractor or any dispute pending before any Court, Tribunal, Arbitrator or any other authority.

7. This Guarantee shall not be determined or affected by the liquidation or winding up or dissolution or change of constitution or insolvency of the Contractor or any change in the legal constitution of the Insurer / Guarantor or the PLL.

8. Any notice by way of request, demand or otherwise hereunder shall be sufficiently given or made if addressed to the Insurer / Guarantor and sent via email or by courier or by registered post, to the Insurer / Guarantor at the address set forth herein.

9. We undertake to make the payment on receipt of your notice of claim on us addressed to name of Guarantor along with branch address and delivered at our above branch and/or via email to: [***insert email ID***] which shall be deemed to have been duly authorized to receive the said notice of claim.

10. The Insurer's obligations under this Bond / Guarantee shall not be reduced by reason of any partial performance of the Contract by the Contractor. The Insurer's obligations under this Bond shall not be reduced by any failure by PLL to timely pay or perform any of its obligations under the Contract.

11. We, the Insurer / Guarantor, further undertake not to revoke this Guarantee during its currency except with the previous express consent of PLL in writing.

12. The Insurer / Guarantor declares that it has power to issue this Guarantee and discharge the obligations contemplated herein, the undersigned is duly authorised and has full power to execute this Guarantee for and on behalf of the Contractor.

13. This Guarantee issued by us is in full compliance with applicable laws of India, as amended from time to time.

14. This Insurance Bond / Guarantee is for the benefit of PLL and its successors and assigns. This Bond/Guarantee is binding not only on the Guarantor, but also on the Guarantor's successors and permitted assigns. The Guarantor shall not assign its rights and obligations hereunder to any person, insurer, company or other entity unless permitted by PLL in writing.

15. Notwithstanding anything herein:

1 The Insurer's / Guarantor's liability under this Guarantee shall not exceed Rs. [***insert Guarantee Amount***];

2 This Bond / Guarantee shall remain in force until [***insert***];

3 This Bond/ Guarantee shall have additional claim period of [***six***] months thereafter; and

4 The Insurer / Guarantor is liable to pay the Guaranteed amount or any part thereof under this Bond / Guarantee only if PLL serves upon the Guarantor a written claim or demand upon the Guarantor or any branch thereof on or before the aforesaid claim period.

Signed and sealed this [●] day of [●], [●] at [●].

SIGNED, SEALED, AND DELIVERED

For and on behalf of the Guarantor by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

----------o----------o----------o----------o----------

Instructions: -

a) The surety bond shall be from a Surety Insurer as per guidelines issued by Insurance Regulatory and Development Authority of India (IRDAI) as amended from time to time.

b) The surety bond should contain the name, designation and code number of the officer(s) signing the surety bond.

c) The address, telephone number, E-mail and other details of the head office of the surety insurer as well as of issuing branch should be mentioned on the covering letter of issuing branch. The letter may also include any web portal link, from where the Surety Bond can be confirmed by the Company.

d) The Insurance Surety Bond should be on Non-Judicial stamp paper/e-stamp paper of appropriate value as per Stamp Act prevailing in the state(s) where the Insurance Surety Bond is submitted or is to be acted upon or the rate prevailing in State where the Insurance Surety Bond is executed, whichever is higher. The Stamp Paper/e-stamp paper shall be purchased in the name of Bidder/Insurer issuing the Insurance Surety Bond.

PROFORMA OF "INSURANCE SURETY BOND (ISB)" FOR "EARNEST MONEY DEPOSIT/ BID SECURITY"

(To be stamped in accordance with the Stamp Act)

To, M/s Petronet LNG Limited _____	**Insurance Surety Bond No.**	
	Date of ISB	
	ISB Valid up to (Expiry date)	
	Claim period up to (indicate date of expiry of claim period which includes minimum three months from the expiry date)	
	Stamp Sl. No./e-Stamp Certificate No.	

Dear Sir(s),

In accordance with Tender Document under your reference No _____ M/s. _____ having their Registered / Head Office at _____ (hereinafter called the Tenderer/Bidder), wish to participate in the said tender for

_____

As an irrevocable Insurance Surety Bond against Earnest Money Deposit for the amount of _____ is required to be submitted by the Bidder as a condition precedent for participation in the said Tender Document which amount is liable to be forfeited on the happening of any contingencies mentioned in the Tender Document.

We, the _____ [Name & address of the Insurer] at _____having our Head Office _____ (Local Address) guarantee and undertake to pay immediately on demand without any recourse to the Bidder by Petronet LNG limited (PLL), the amount _____ _____ without any reservation, protest, demur and recourse. Any such demand made by PLL, shall be conclusive and binding on us irrespective of any dispute or difference raised by the Bidder.

This Insurance Surety Bond shall be irrevocable and shall remain valid up to _____ [this date should be 90 days beyond the validity of the bid].If any further extension of this Insurance Surety Bond is required, the same shall be extended to such required period on receiving instructions from Bidder M/s. _____ on whose behalf this Insurance Surety Bond is issued.

Notwithstanding anything contained herein:

a) The Insurer's liability under this Insurance Surety Bond shall not exceed (currency in figures) . . . . . (currency in words only)……..

b) This Insurance Surety Bond shall remain in force upto _____ (this expiry date should be 90 days beyond the validity of bid) and any extension(s) thereof; and

c) The Insurer shall be released and discharged from all liability under this Insurance Surety Bond unless a written claim or demand is issued to the Insurer on or before the midnight of ……(indicate date of expiry of claim period which includes minimum three months from the expiry of this Insurance Surety Bond) and if extended, the date of expiry of the last extension of this Insurance Surety Bond. If a claim has been received by us within the said date, all the rights of PLL under this Insurance Surety Bond shall be valid and shall not cease until we have satisfied that claim.

In witness whereof the Insurer, through its authorized officer, has set its hand and stamp on this _____day of _____ 2026 at _____.

Details of next Higher Authority of the Officials who have issued the Insurance Surety Bond:
Name …….
Designation ……..
WITNESS:

(SIGNATURE)
(NAME)

(OFFICIAL ADDRESS)

(SIGNATURE)
(NAME)
Designation with Insurer Stamp
E-Mail ID:
Telephone/Mobile No. :
Attorney as per
Power of Attorney No. _____
Date:

_____

INSTRUCTIONS FOR FURNISHING "BID SECURITY DEPOSIT/ EARNEST MONEY" BY "INSURANCE SURETY BOND"

a) The Insurance Surety Bond shall be from Insurance Regulatory and Development Authority of India (IRDAI) registered general insurance companies as per guidelines issued by Insurance Regulatory and Development Authority of India (IRDAI).
b) The Employer shall be the Creditor, the Bidder shall be the Principal debtor and the Insurance company/Insurer shall be the Surety in respect of the Insurance Surety Bond to be issued by the Insurer.
c) The Insurance Surety Bond should be on Non-Judicial stamp paper/e-stamp paper of appropriate value as per Stamp Act prevailing in the state(s) where the Insurance Surety Bond is submitted or is to be acted upon or the rate prevailing in State where the Insurance Surety Bond is executed, whichever is higher. The Stamp Paper/e-stamp paper shall be purchased in the name of Bidder/Insurer issuing the Insurance Surety Bond.
d) The expiry date should be arrived at in accordance with "ITB: Clause-C9 of Part-1".
e) The Insurance Surety Bond by bidders will be given by an insurance company having a **credit rating of AA or above** from **CRISIL/ICRA**. Please note that this rating criteria requirement does not apply to **public sector insurance companies**.
f) A letter from the issuing insurer of the requisite Insurance Surety Bond confirming that said Insurance Surety Bond / all future communication relating to the Insurance Surety Bond shall be forwarded to the Purchaser at its address as mentioned at "ITB".
g) Bidder must indicate the full postal address of the Insurer along with the Insurer's E-mail / Fax / Phone from where the Insurance Surety Bond has been issued.

MATTER TO BE MENTIONED IN COVERING LETTER TO BE SUBMITTED BY VENDOR ALONG WITH INSURANCE SURETY BOND

1	**INSURANCE SURETY BOND NO**	**:**			
2	**VENDOR NAME / VENDOR CODE**	**:**	**NAME**		
			VENDOR CODE		
3	**INSURANCE SURETY BOND AMOUNT**	**:**			
4	**TENDER NO**	**:**			
5	**NATURE OF INSURANCE SURETY BOND**	**:**			
	(Please Tick (√) Whichever is Applicable		**PERFORMANCE INSURANCE SURETY BOND**	**SECURITY DEPOSIT**	**EMD**
6	**INSURER DETAILS**				
		(A)	**EMAIL ID:**		
		(B)	**ADDRESS:**		
		(C)	**PHONE NO:**		

युनाइटेड इंडिया इंश्यूरेन्स कंपनी लिमिटेड
United India Insurance Co. Ltd.
(D-24 & E-25, 2nd Floor, Himalaya House, 23, K.G.Marg, New Delhi-110001, India)

MARINE CUM ERECTION INSURANCE POLICY

POLICY NO.: 5003004425P113683258 (SCE) / 5003002125P113683259 (MCE)
UIN NO. IRDAN545CP0066V01200708

PERIOD OF INSURANCE
From 00:00 Hrs of
01/11/2025 To Midnight of
31/03/2028

Insured
M/s PETRONET LNG LIMITED

4TH FLOOR, TOWER I, WORLD TRADE CENTER, NAUROJI NAGAR, NEW DELHI - 110 029, INDIA
110029
SOUTH WEST DELHI, DELHI

Issuing Office Address:
Corporate Cell, Delhi
D-24 & E-25, 2nd Floor, Himalaya House
23, K.G. Marg, New Delhi- 110001, India

1. Policy Schedule

Policy No.	5003004425P113683258 (SCE) / 5003002125P113683259 (MCE)
Policy Type	MARINE CUM ERECTION INSURANCE POLICY
The Insurer	United India Insurance Company Limited Corporate Cell, Delhi D-24 & E-25, 2nd Floor, Himalaya House 23, K.G. Marg, New Delhi- 110001, India
Policy Period	00:00 Hrs of 01/11/2025 to Midnight of 31/03/2028 *including 4 months of testing (including hot testing) and commissioning plus 24 months of Maintenance.*
Unique Reference Code	UII500300EN0123579642526
Co- Insurance Details	1. United India Insurance Co. Ltd., LCB, New Delhi: 50% share 2. ICICI Lombard General Insurance Co. Ltd.: 19% share 3. Bajaj General Insurance Limited: 16.41% share 4. National Insurance Co. Ltd.: 14.59% share
Name of Project	750 KTPA Propane De-Hydrogenation Unit (PDH), 500 KTPA Polypropylene unit (PP) and Ethane & Propane import, storage and transfer facilities at Dahej, in the state of Gujarat, India. ("Project")
Name of Insured	i. Petronet LNG Limited and / or Subsidiaries thereof and / or Joint Ventures / Consortiums including the aforementioned as Principal/Main Contractors. ii. Principals and/or Project Financers and/or Lenders. Lenders are State Bank of India, Bank of Baroda, ICIC Bank and Axis Bank along With SBI CAPS as Security Trustee. iii. President of India iv. Licensors and Project management Consultants for the Project. Project Management Consultant is Engineers India Limited. Licensors are M/s UOP LLC for PDH Unit and M/s Lummus Novolen Technology GMBH for PP Unit v. (a) Other Contractors and/or Sub-contractors of any tier. (b) Architects and/or Consultants and/or Design Bureaux and/or Suppliers and/or their Subsidiaries thereof and / or Joint Ventures / Consortiums (not forming part of i) above, as regards their on-site activities but excluding their design, plan or specification work. but only to the extent that the Insured mentioned in (i) above has, by contract or agreement, agreed to provide such party(ies) with the benefit of this insurance (or part thereof). vi. Any other party having an insurable interest (and not mentioned above) to the extent that the Insured

<table>
<tr><td></td><td>mentioned in (i) above is required by contract or agreement to provide insurance to such party(ies).</td></tr>
<tr><td>Mailing Address</td><td>4TH FLOOR, TOWER I, WORLD TRADE CENTER, NAUROJI NAGAR, NEW DELHI - 110 029, INDIA</td></tr>
<tr><td>Location/s of The Risk</td><td>The proposed Petrochemical complex will be set up at 47.73 hectares of Greenfield land located adjacent to the existing Dahej LNG complex of Petronet LNG Limited (PLL) at GIDC Industrial Estate, Plot No 7 A, Dahej, Taluka Vagra, Distt, Bharuch, Gujarat, Bharuch, 392130 and coming under Gujarat Industrial Development Corporation (GIDC). Geographical Location is given in Toposheet no. F43M5-46 C5, F43M6-46 C6, F43M9-46 C9 & F43M10-46 C10 of Survey of India (SoI) Map.

Detail of Co-ordinates (lat-long) of all four corners of the proposed project site:
<table>
<tr><td>Latitude</td><td>Longitude</td></tr>
<tr><td>21°40’12.84” N</td><td>72°32’21.78”E</td></tr>
<tr><td>21°39’55.47”N</td><td>72°32’22.51”E</td></tr>
<tr><td>21°40’15.79”N</td><td>72°32’46.20”E</td></tr>
<tr><td>21°39’58.90”N</td><td>72°32’50.82”E</td></tr>
</table>
</td></tr>
<tr><td>Nature of Project</td><td>All works related to but not limited to 750 KTPA Propane De-Hydrogenation Unit (PDH), 500 KTPA Polypropylene unit (PP) and Ethane & Propane import, storage and transfer facilities at Dahej, in the state of Gujarat, India.</td></tr>
<tr><td>Insured Property</td><td>All materials, equipment, supplies, Plant & Machinery, goods, consumables, any free issue materials, spare parts and materials in transit forming part or intending to form part of the Project, whether located on-site or at off-site storage, fabrication yards, vendor/manufacturer premises or in transit, including but not limited to temporary works / structures, temporary civil works including project office buildings, site facilities, site roads, lighting , fencing, construction power, enabling works and amenities, common facilities, improvements, tie-ins, connections and additions/modifications to existing facilities, pipelines, storage sheds, tanks, spheres, fabrication/storage yard including all equipment, power Infra, Security, IT infrastructure, instrumentation, automation and control systems, material awaiting erection or installation and all other property collectively forming part of or intended to form part of the Project.</td></tr>
</table>

2. Sum Insured

A. **Marine Open Cover**:

Description	**Amount in INR(incl. taxes)**
Imported Supplies	2,868 Cr
Indigenous Supplies	7,261 Cr
Total Sum Insured	10,129 Cr

Per Bottom Limit: INR 250 Crore

B. **Section-I- Construction/Erection All Cover**: INR 18,582 Cr
Section-II- Third Party Liabilities Cover: INR 25 Crore for any one accident and INR 50 Crore in aggregate.

3. DEDUCTIBLES

A.	**Marine Open Cover Excess:**	0.25% of the consignment value subject to minimum of INR 1,00,000/-for each and every claim.
B.	**Section – I - Erection "All Risks" Excess:**	• **Excess for AOG** – 10 % of the claim amount subject to a minimum of INR 5 Crore (i.e. Acts of God perils like storm, tempest, flood, water damage, subsidence, collapse and earthquake). • **For Testing & Commissioning Claims including Fire and Explosion during Testing and Commissioning Period/ Fire & Explosion/ Maintenance / Design Defect** - 10% of claim amount subject to minimum of INR 5 Crore for each and every loss. • **All other Perils** - 5% of claim amount subject to minimum of INR 2.5 Crore for each and every loss.
	Section – II -Third Party Liability Excess:	Death/ Bodily Injury - Nil. Property loss/damage – 5% of claim subject to minimum of INR 10 lacs for eel.

4. PREMIUM

5. INSTALLMENT SCHEDULE

6. A: MARINE OPEN COVER

Marine cargo insurance for all Goods, Plant & Machinery, Equipment, Materials, Consumables and free-issue materials etc. intended to form part of the Project, including items sent back and forth for repair/rectification/fabrication/testing, in transit from anywhere in the world to anywhere in the world, on a 'warehouse to warehouse' basis against loss or damage arising from customary 'all-risks' perils (including war, strikes, riot and civil commotion) while in transit by any conveyances and/or vessels and/or air and/or barge and/or road and/or rail and/or any other conveyance by land, sea or air and connections, including during loading, unloading and temporary storage, up to full replacement value of such Goods, Plant & Machinery, Equipment, Materials, Consumables and free-issue materials etc.

Coverage shall also include the movement of damaged Plant & Machinery and Equipment etc. sent back and forth for repair/rectification/fabrication/testing (from project site/fabrication yard to vendor's site and back to project site/fabrication yard).

Coverage shall further include the movement of project Goods/Materials/Plant & Machinery etc. from fabrication/storage yard to project site and vice versa.

Basis of Valuation:

1. **For Imported Supplies:** Costs, insurance, freight charges, loading and unloading charges, survey charges, duties and taxes (including Customs Duties) plus 10%, plus anticipated future escalation of 20%.
2. **For Indigenous Supplies:** Costs, insurance, freight charges, loading and unloading charges, survey charges, duties and taxes (including GST) plus 10%, plus anticipated future escalation of 20%.
3. **Second-hand and used items:** Market value for a similar item in equivalent condition immediately prior to transit + GST (at actual).
4. **Return:** Invoice Value + 10%.
5. **Machineries moving to and from for repairs:** Invoice Value + Cost of Repairs including GST.

All valuations above shall be deemed to represent the replacement cost as new, unless otherwise stated (e.g., used equipment), and shall include all costs reasonably incurred for procurement, transportation, insurance, customs clearance, duties, taxes, surveys, and preparation for installation.

Subject Matter Insured:

Cargo and/or merchandise of every description incidental to the Insured's business and the Project and/or any other cargo where the Insured has insurable interest, consisting principally of, but not limited to:

- All Goods, Plant & Machinery, Equipment, Materials, Consumables, Stores and Spares to be installed as part of the Project, whether new or used
- All capital equipment, machinery (including over-dimensional cargo, cranes, engines, pumps, electronic/electrical/mechanical equipment's and spares), laboratory equipment and its spares, fragile and non-fragile goods (including glass, insulation, refractory items), structural materials, mild steel plates, control and remote operated valves, pipes, fittings, hardware and building materials (cement, packing materials, wrapping/coating materials)
- Bulk and break-bulk cargo, free samples, raw materials, hazardous and non-hazardous chemicals, catalysts (including spent catalysts), adhesives, temperature-sensitive cargo;
- Containers of any kind, materials procured on loan, goods held in trust or under custody/control of the Insured;
- Goods removed for repair, rectification, fabrication, testing, renovation or job work and returning to the project site;
- Goods/materials moving between storage/fabrication yards, vendor premises, ports, warehouses and the Project site;
- All other goods for which the Insured is required to insure, or authorized/instructed to insure, or which may otherwise be at their risk and/or for which they may be legally liable, or which are incidental to the performance of the Project.

The above shall include all such goods in transit by any mode (road, rail, sea, air, barge, inland waterways) from anywhere in the world to anywhere in the world on a warehouse-to-warehouse basis, including loading, unloading, transshipment, temporary storage and associated handling risks.

Storage Period:

The cover shall include the risk of loading, unloading and handling during transit at all points and temporary storage during the ordinary course of transit at all locations. The risk of storage during transit is held covered in accordance with the Duration Clause of ICC A/ ITC A/ ICC(Air), but extended to allow up to 60 days additional storage beyond the standard duration, automatically, without prior declaration or additional premium.

Any intentional storage/ or storage beyond this period of 60 days after expiry of the respective ICC(A)/ITC (A)/ICC(Air) duration periods, shall be held covered subject to prior notice to insurers and agreement on additional terms and conditions if applicable.

For the avoidance of doubt, cover will remain uninterrupted for storage at intermediate locations deemed part of transit as per Institute Cargo clauses, provided that storage is incidental to the transit.

Packing:

It is understood and agreed that packing shall be in accordance with standard and customary practices for the type of goods insured and the mode of transit, including loose, bulk, and break bulk shipments where customary.

For the purpose of this insurance, packing shall be deemed acceptable if it conforms to:

- the manufacturer's standard packing, or
- the customary practice of the trade or carriage mode, unless otherwise agreed.

Voyage/Transit Details:

From anywhere in the World to anywhere in the World on a warehouse-to-warehouse basis, including but not limited to:

- Imports, Exports, Domestic Purchase, Inter Unit Transfers, /Depot transfers
- Purchase Returns,
- High Sea Sales/High Seas Purchases,
- Movements to & fro to Job Workers/ Loan License Manufacturers/Third Party Manufacturers,
- Movements of Cargo to & fro for repairs, rectification, fabrication, testing.
- Movement of Plant & Machineries between the assured premises/units/Plants/fabrication yards,
- Mercantile Trade Shipments,
- All kind of transhipments including Multi Modal transhipments,
- Movement of the containers/Reefer Containers/ISO Tanks (loaded and empty) within India or Internationally
- Any other movements for which the Assured has an insurable interest, assumes contractual or legal responsibility, or may be authorized or instructed to insure/or which maybe otherwise at their risk.

Cover shall include transits by sea, air, road, rail, inland waterways, coastal vessels, barges, and multimodal transport, including all customary transshipment and storage incidental to the voyage.

Mode of Transit

Rail and/or Road and/or Sea and/or Air conveyance and/or Inland waterways and/or coastal vessels and./or barges and/or Courier and/or Parcel Post and/or Personal Carriage and/or own transport arranged by the insured and/or hand baggage by employees or authorized representatives of the insured in connection with insured's business activities, whether under contract of affreightment or not.

Cover shall apply irrespective of whether the transport is performed under bill of lading, airway bill, consignment note, or informal arrangements.

Terms of Cover: All Risk and War & SRCC Cover

1. Institute Cargo Clauses "A" CL382 dated 1st January 2009

2. Institute War Clauses (Cargo) CL385 dated 1st January 2009
3. Institute Strikes Clauses (Cargo) CL386 dated 1st January 2009
4. Institute Cargo Clauses (Air) CL387 dated 1st January 2009
5. Institute Strikes Clauses (Air Cargo) CL389 dated 1st January 2009
6. Institute War Clauses (Air Cargo) CL388 dated 1st January 2009
7. Institute War Clauses (Sendings by Post) CL390 dated 1st March 2009
8. Institute Replacement Clause dated 1st December 2008
9. Institute Classification Clause CLS354 dated 1/1/01 to apply to ocean going vessels over 25 years of age, but additional premiums, if any, to be calculated in accordance with agreed scale.
10. Termination of Transit Clause (Terrorism) 2009 JC 2009/056 dated 1st January, 2009
11. Marine Cyber Endorsement
12. Inland Transit (Inland Vessels) Clause – A
13. Inland Transit (Rail or Road) Clause – A
14. ITC Clause B for tail end risk
15. Inland SRCC Clause
16. Cargo termination of storage in transit clause.
17. Concealed Damage Clause (90 days).
18. Extension under Duration clause at port of discharge is required upto 60 days.
19. Risk of loading & unloading is covered.
20. Paramount War Clause
21. In case of Dual Insurance wherein the Equipment's and Materials etc. are covered by the Seller/Contractor/Sub-Contractor etc. Policy and also insured under this Policy, the Primary Liability in such cases to pay claims shall be of the Insurer issuing this policy. This policy is primary and non- contributory.
22. Container Claims Clause
23. Container Cover Clause
24. Registered Post Parcel Clause duly amended for Courier
25. Replacement Clause (Second hand Machinery)
26. Cargo ISM Endorsement
27. FOB Clause – 30 days
28. Sorting Charges
29. Buyer's Interest Clause
30. Contingent Duty Clause
31. Notional Duty Clause
32. Shut Out Clause – 30 days
33. Deliberate Damage Pollution hazard Clause
34. General Average Clause
35. Forwarding Charges Clause
36. Payment on Account Clause – 75% of the assessed amount in case of net claims exceeding Rs. 10 lacs
37. Shortage of Container (including LCL shipments)/ Other Mode of Conveyance
38. Container, Trailer or Railcar Demurrage Charges clause
39. Delay Caused by GA for Temperature Controlled Cargo Brands Clause
40. Contamination and/ or Fumigation Clause
41. Repacking Clause
42. Debris Removal Clause/ Salvage Disposal/ Salvage Incineration/ Destruction Cost
43. Letter of Credit Clause
44. Non Standard Claim Settlement – 90 % of the Assessed Claim Amount
45. Express/ Emergency Freight clause
46. Returned Shipments (OEM Packaging: ICC A/ ITC A; Rest: ICC B/ ITC B)

47. Proof of Loss
48. Wilful Misconduct Clause
49. Claused Bill of Lading
50. Errors & Omissions Clause
51. Knowledge of Occurrence Clause
52. Innocent Assured Clause
53. Pair & Set Clause
54. Missing Goods Clause – 90 days
55. Deviation Clause
56. Bulk Solvents
57. Goods Subject to loss Clause
58. Air Freight Replacement Clause
59. Acceptance of Documents clause
60. Attachment and termination of Risk Clause
61. Shipment Clause
62. Customs Duty Insurance Clause
63. Multi Transit Clause
64. Limitation of Liability clause to be waived in respect of movement of the cargo by assured's own road vehicle/Private Carrier where no LR is issued.
65. Waiver of Recovery Rights/Subrogation for claims upto INR10,00,000/-
66. Waiver of FIR in respect of claims upto INR 10,00,000/- for losses occurring due to theft/Pilferage/Non-Delivery/Shortage/Accident
67. Self-Survey Limit of INR 10,00,000/-
68. Cargo Accumulation Clause
69. Non-Marine Exclusion Clause
70. Political Risk, Financial Guarantee and Credit Risk Exclusion Clause,
71. Additional Custom Duty Clause
72. Escalation Clause – 20%
73. Control of damaged goods clause
74. Forwarding expenses clause
75. Fragile items covered on All Risk Basis
76. Unseaworthiness and unfitness clause admitted
77. Sue & Labour / Loss minimization expenses
78. Extension of cover in respect of damaged interests
79. Cargo ISM Forwarding Charges Clause (at no additional premium) JC 98/023
80. Transshipment Clause
81. Label Clause

Warranties, Other Clauses & Exclusions

1. Communicable Disease Exclusion
2. Over Dimensional Cargo Survey Warranty
3. Excluding shipments from Cuba, North Korea, Syria, Iran and Crimea absolutely.
4. Excluding Shipments to/from and within Ukraine, Russia, Belarus, Ukrainian territorial waters and Russian territorial waters in the Black Sea and the Sea of Azov.
5. War & SRCC cover for all transits whilst the conveyance carrying the interest insured herein is within the HRA as per the latest listed areas in the JWLA (currently JWLA-032) unless specifically agreed by the insurers and additional premium has been paid by the Assured.
6. 50:50 Clause with EAR Policy.
7. Sanction Limitation and Exclusion Clause

8. Five Powers War Exclusion (Amended to Include Triggering of NATO Agreement)
9. Israel &/Or the State of Palestine &/Or Lebanon Condition
10. Institute Cyber Attack Exclusion Clause CL380 dated 10th November 2003
11. Institute Radioactive Contamination, Chemical, Biological, Bio-Chemical and Electromagnetic Weapons Exclusion Clause CL370 dated 10th November 2003

Cancellation of Policy

Policy will not be cancelled or allowed to expire without a written notice to all parties at least sixty (60) days in advance, except in respect of marine cargo insurance where in the case of war, strikes, riots and civil commotion risks insurance may be cancelled by giving seven (7) days' notice to the Insured but forty-eight (48) hours in respect of strikes, riots and civil commotion risks in respect of sending's to or from the United States of America. Cancellation shall become effective on the expiry of the appropriate number of days from midnight of the day on which notice of cancellation is issued by or to the Insurers but shall not apply to any transit insurance that shall have been declared or attached in accordance with contract terms and conditions before the cancellation becomes effective.

Limit per Bottom: Single Shipment limit
(Import)is INR 250 crore (or its equivalent in any other currency)
(For Inland Supply): INR 250 crore (or its equivalent in any other currency).
In case of increase in exchange rate or taxes & duties, the PBL shall be revised upwards during the policy period.
For consignment value more than specified above, the rates shall be mutually agreed.
Limit Per Location Clause: Not withstanding anything to the contrary contained in this contract, underwriters liability in respect of any one accident or series of accidents arising from the same event in any one location shall not exceed the limit per location amount stated herein i.e. Rs.500 crore.

B: Section – I - Erection All Risks Cover
Section – II - Third Party Liability including Cross Liability

Risk Cover:

The risk coverage under the policy shall commence from the earliest of the following events:

- Upon unloading of goods/consignments at the site of erection/fabrication yard; or
- Start of civil works; or
- Policy start date as notified by PLL

Cover shall remain in force throughout the entire project duration, including during transportation of items/ dismantled items to and fro vendor's work including all risk in course of repair/ reconditioning work at vendor's workshop, transportation from vendor's and supplier's work and warehouse to intermediate site, site stores, handling, shifting, storage at intermediate location of goods/consignments, pre-assembly for the purpose of design, erection, testing and commissioning and until completion of Design, Erection, Testing, all other pre commissioning activities of the plant, Commissioning and Trial Operation of all connected systems in respect of Plant & Machinery covered and commissioning and maintenance period thereafter. The risk coverage under the policy to include any loss or damage caused to the insured property due to any accident in insured property. The risk coverage shall continue till successful commissioning/testing of the project, up to the stabilized load at which the plant is taken over by the principal so that same facilities will be migrated to Mega Policy of PLL. This is to ensure that at no point of time the facility/facilities

remain uninsured.

Insurers hereon explicitly note and agree than this policy is a seamless project insurance policy which will cover all construction/erection/testing/commissioning/ operational and maintenance activities of the entire project works whether in progress, tested, handed over, partially handed over, commissioned/being used etc. and will continue to provide cover on an all risk basis (and not just limited to construction/erection activities) together with all the extensions and add on covers agreed and the cover continues seamlessly until the later of either the final commercial operation date of the entire plant being achieved or until the policy expiry period or any extensions thereof as may be agreed.

Scope of Cover:

All contracts with respect to Project of the Insured attaching during the period of insurance and shall include, but not be limited to, the following:

1. Storage, Design, Erection, testing and commissioning charges including SCE Insurance, including supervision and other incidental services by vendors
2. Testing period (for each unit and Integrated Testing of the overall system)
3. Temporary civil works including project office building, storage sheds, storage yard and associated temporary structures.
4. Project office building, associated equipment, furnishings and fixtures etc.
5. Enabling facilities like temporary roads, temporary lighting, construction power distribution network and construction water systems etc.
6. Permanent civil works such as buildings, foundations, earthwork and associated materials for construction thereon.
7. Cost of material handling at site
8. Cost of contingencies including expenses for foreign experts at site in connection with damage/loss affecting associated plants/facilities.
9. Supervision charges
10. Cost of lubricants, consumables and similar materials required for erection and commissioning.
11. Miscellaneous erection and testing expenses
12. Early works cover for activities undertaken prior to full contract effectiveness where materials form part of the Project
13. Catalysts, including Spent Catalysts
14. Contractor's Charges including Contractor's Overheads, supervision costs and incidental expenses.

The above shall include all materials, items, works and associated costs forming part of the declared value of the Project, whether awaiting erection, under erection, pre-tested, tested, commissioned, temporarily handed over, partially handed over, or used, and all activities incidental to the successful completion of erection, testing, commissioning and stabilization at design load.

Commissioning/Testing Period Cover:

1. Commissioning/Testing period available under the policy shall cease to operate with the commencement of the commercial production. Generally, testing period shall be for a period of 4 (four) months & it starts with the commencement of startup activities which involves all activities required to be performed after pre- commissioning and prior to trial operation.

2. All activities till Erection of complete plant and prior to start up activities shall be treated as Pre- commissioning activities and shall continue under the erection cover. Pre-commissioning activities shall include all activities required to be performed after final tests for all units, offsite, utilities contained within plant, equipment and machineries comprised within the plant to bring the equipment covered in units from an inactive condition to a state ready for trial run and shall include but not limited to checking of systems and vessels, flushing and steam blowing, air blowing of pipelines, system leak checking up to specified pressure, purging the system using inert gas, checking of total instrumentation system of the plant, checking of electrical equipment from proper earthing, installation of resistance conducting operability tests on individual equipment, vessels and systems, integration of all control systems of the unit with the control system of the Project and LNG Terminal and all other activities required to be performed before commissioning and trial run of the unit.
3. Testing would be deemed to have commenced from the date the plant is ready for trial run. Testing involves introduction of hydrocarbon and Equipment/Plant/Unit is tested upto 100% of design Criteria maintained by each separate unit in a stable and controlled manner for a continuous ongoing period of minimum 72 hours (N.B.- Design Criteria are the plant design specification as stipulated in the project design basis.) and will continue till commissioning of the unit. "Commissioning" means pressing in to service the unit(s), equipment (s), Vessels, pipelines(s) machinery and systems and sub systems comprised within the plant in accordance with procedures as approved in Plant Specific Operating Manual and as per the requirement of the Process Licensor, which is the subject matter of the contract after successful testing and trial run of the Plant. In case the commissioning could not be achieved up to the expiry of testing period, the same shall be extended on payment of additional premium as per mutually agreed rates.
4. Testing will also involve part of the existing plant and machineries from the operational unit with an integration to the newly erected plant and such P&M will be involved in integrated testing and commissioning activities. This policy covers such P&M of the operational plant which are involved in testing/ integrated testing phase of new plant, and are covered in respect of any loss or damage occurring during the project and defect liability period for any damage arising out to erection , commissioning and testing work.

   If testing period is suspended after commencement of test run for any reason whatsoever, any period during which the test run remained suspended shall be treated as erection period. However, the testing period shall remain reduced by actual duration of testing already carried out in the initial test run. The minimum testing period is one day.
6. In case the plant is under shut down for attending commissioning problems, the period of shut down will be considered as Erection Period. The testing period available for the plant on restart would be for a duration equivalent to the testing period endorsed to the policy initially less the number of days the plant has already run on test / trial mode. Note: Taking a turbine on barring gear shall be treated as erection period. Any similar activity for other plants in the process of shutdown, shall be treated as period of erection and not a period of testing
7. Testing period will be applicable for each unit and integrated testing of plants/units.

INTEREST:

Section I – Erection All Risk/Storage cum Erection "All Risks"

All risk coverage encompassing and including but not limited to the storage, construction, erection/contract works, testing phases, stocks and supplies of every description and nature,

all real and personal property of every kind, nature and description forming part of/intending to form part of the project, belonging to the Principal Insured (Beneficiary) /contractors/subcontractors of all tiers or for which they are responsible to insure and/or in which the said entities have an insurable interest or property of others in the Insured's care, custody or control or which the Insured entities have agreed to insure prior to loss or damage and all other and such property in which the insured may acquire insurable interest during the course of erection during the policy period. Covering physical loss or damage to the Facilities or part thereof at the site, with an extended maintenance coverage in respect of any loss or damage occurring during the project and defect liability period while the Contractor/sub-contractor is on the site for the purpose of performing its obligations during such period.

The Insurer will also reimburse the Insured for the cost of clearance and removal of debris following upon any event giving rise to an admissible claim under this policy but not exceeding in all the sum (if any) set opposite thereto in the Schedule.

Section II – Third Party Liability including Cross Liability

The Insurer will indemnify the Insured against –

a) Legal liability for accidental loss or damage caused to property of other persons including property held in trust by or under custody of the Insured for which he is responsible excluding any such property used in connection with erection thereon;
b) Legal liability (liability under contract excepted) for fatal or non-fatal injury to any person other than the Insured's own employees or workman or employees of the owner of the works or premises or other firms connected with any other erection work thereon, or members of the Insured's family or of any of the aforesaid; directly consequent upon or solely due to the erection of any property described in the Schedule.
c) Provided that the total liability of the Insurer during the period of Insurance under this clause shall not exceed the limits of Indemnity set opposite thereto in the Schedule.
d) In respect of a claim for compensation to which the indemnity provided herein applies, the Insurer will, in addition, indemnify the Insured against –
   i. all cost and expenses of litigation recovered by any claimant from the Insured, and
   ii. all costs and expenses incurred with the written consent of the Company. The exclusion i.e. War & Terrorism, Sanctions, Limitations and Exclusion Clause, Political Risks Exclusion Clause shall apply to this Section also.

TERRITORIAL LIMITS: Anywhere in India in connection with the Contract

ADD-ON COVERS / CLAUSES & CONDITIONS:
Section I and II

Construction/Erection All Risks Policy plus endorsements:

Sr No.	Description	Sub-Limits
1.	Cover for loss or damage due to SRCC/RSMD.	Full Limits
2.	Continuity of cover during operational phase for Unit/Plant tested but awaiting integral testing (along with other units/Plants)	Upto 6 Months. All units to remain under project policy till commissioning of the entire complex.

Sr No.	Description	Sub-Limits
3.	Extended Maintenance (Extended Defects Liability Clause) for Plant & Machinery	24 Months After completion of Testing Period
4.	Maintenance Visit (Limited Defects Liability Clause) for Civil Works	12 Months After completion of Testing Period
5.	Expediting Costs - Cover of extra charges for Overtime, Night Work, Work on Public Holidays and Express Freight including Air Freight	Upto 30% of net claim amount.
6.	Inland Transit to & from off-site storage / vendors/manufacturer premises	Rs. 500 Crore AOA and Full Limit in aggregate.
7.	50:50 Clause	
8.	Offsite storage, Fabrication and / or modification and / or any work related to project at any site (including manufacturing) and respective transits involved.	Rs. 500 Crore AOA at each location & Full Limit in aggregate.
9.	Free Automatic Reinstatement	Upto 25% of sum insured
10.	Escalation	Upto 30%
11.	Professional Fees Clause (To Include Architects, Surveyor & Consulting Engineers Fees or other Professional Fees including Foreign experts visit)	Rs. 75 Crore AOA & Full Limit in aggregate.
12.	Clearance and Removal of debris including removal and disposal of debris, and material foreign / external to the works, desilting & dewatering the works - Per Occurrence.	Rs.100 Crore AOA
13.	Loss Minimization Expenses	Rs. 50 Crore AOA
14.	Firefighting facilities and fire safety at construction sites	At Actuals
15.	Fire fighting expenses	At Actuals
16.	Owners Surrounding Property with FLEXA including during extended maintenance cover.	Upto 50% of Policy Sum Insured but with FLEXA risks
17.	Pro-rata extension of policy period	Extension of the policy for up to 12 months on pro-rata basis irrespective of the claim ratio. Beyond that it will be pro-rata if claim ratio is below 50% and will be mutually agreed if claim ratio is above 50%.
18.	Coverage for Earthquake incl. Tsunami	Full Sum Insured
19.	Coverage for Loss, destruction or damage directly caused by Storm, Cyclone, Typhoon, Tempest, Hurricane, Tornado, Flood or Inundation incl. hailstorm and or any other act of God peril.	Full Sum Insured
20.	Waiver of Subrogation	Agreed
21.	72 hours clause	Covered
22.	Waiver of Contribution	Agreed

Sr No.	Description	Sub-Limits
23.	Design Defect Cover - DE-3 for Civil Works and DE-4 for Electromechanical/ Hydro mechanical, P&M Works	Covered
24.	Multiple Insured Clause	Covered
25.	Additional Custom Duty	Upto INR 250 Cr
26.	Cover for Catalyst	INR 500 Crore AOA
27.	Hydrocarbon Endorsement For Testing & Commissioning	wording as per MR 204 for Hydrocarbon Processing Industries 1 and MR 205 for Hydrocarbon Processing Industries 2 Cover for catalyst during hot testing - INR 500 Crore AOA.
28.	Civil Engineering Works: a) All permanent Civil Engineering Works, b) All Types of temporary works (On Site and Offsite) including Temporary Structure, Site Office, Stores, Godown, Workshop etc., Site Facilities, and Amenities for Labour, worker's camp, warehouses of the Project, Safety & QA / QC Lab / Facilities, P & M and Electrical Infrastructure Works & Other Etc. until the end of usage of such Temporary Facilities provided included in Contract Price while the contract was awarded by the Owner.	Value of Civil Works included in Sum insured. Temporary Works – Rs. 100 Cr.
29.	Camps and Stores Cover	Rs. 25 Crore AOA
30.	Cover Of Leak Search Costs When Laying Pipelines -	Rs. 50 Crore AOA
31.	Construction Machinery Plants And Equipment's -	Rs. 50 Crore AOA
32.	Loss-Payee Clause	
33.	Valuable Papers and Records and Restoration of records/ Plans/ Documents etc.	Rs. 25 Crore AOA
34.	Public Authorities Clause	Upto INR 75 Crore
35.	Free Issue Materials Clause	At Actuals
36.	Non - Vitiation Clause	Covered
37.	Leased Equipment	Rs. 50 Crore AOA
38.	Temporary Repairs	At Actuals
39.	Put to Use	Project Sum Insured and 6 Months
40.	Refund Of Premium for Early Completion of The Project -	Pro-rata on Monthly Basis
41.	Refund of Premium for cancellation of Policy	Pro-rata on Monthly Basis
42.	Endorsement Concerning Storage	Value per storage unit not exceeding the equivalent of Rs. 500 Cr
43.	Claim preparation cost	Rs.10 Crore AOA
44.	Nominated loss adjusters / surveyors clause	As per Annexure - A

Sr No.	Description	Sub-Limits
45.	On Account Payment clause	Upto 75% of initial estimated value of loss
46.	Errors & Omission Clause: It is understood and agreed upon that any accidental error or omission in the description of the covered property shall not prejudice the Insured's interest.	
47.	Coverage for risks of pollution, contamination and seepage	Rs.100 Crore AOA
48.	Cut Through Clause (if applicable)	
49.	Policy Non-cancellable – other than non-payment of premium	
50.	Fragile items like glass, insulation, refractory, insulators etc. as may be due to peril insured	At Actuals
51.	Cover for Property belonging to or held in care, custody or control of the insured	At Actuals
52.	Cessation of Work Clause	Upto 90 Days any one year and 180 days overall policy period
53.	Primary and Non-contributory Clause	Covered
54.	Instalment clause	Yearly instalments
55.	MR 208 Underground cables and pipes	
56.	Environmental Clean-up Cost Cover	Rs. 75 Crore AOA
57.	Vibration Removal & Weakening Support	Limit within overall TPL limits
58.	Destruction Of Undamaged Insured Property	INR 100 Crore AOA
59.	Piling Foundation & Retaining Wall Works Endorsement	Covered
60.	Cover for decontamination	INR 25 Cr AOA
61.	Removal to Place of Safety	
62.	Work away Repairs	
63.	Extended Expiration clause	
64.	Theft and Burglary	Waiver for FIR upto Rs. 1 Cr over and above deductible
65.	Crane hiring charges	Rs. 25 Cr AOA
66.	Coverage for any feed stock, raw material, stock in process to be used for testing and commissioning procedure	Rs. 250 Cr AOA. For Catalysts it is Rs. 500 Cr AOA.
67.	Immediate Repair clause	
68.	Breakage of Glass	
69.	No Control clause	
70.	Agreed Bank Clause	
71.	Loss payee clause	
72.	Suspension of testing period clause	
73.	Intermittent testing cover:	It is noted and agreed that testing may not be continuous, and any suspension of testing period will not reduce the testing period and shall be considered under erection period. The aggregate

Sr No.	Description	Sub-Limits
		period of any intermittent testing shall not exceed the testing period stated under the period of insurance in the RFQ/ policy schedule
74.	Repeat tests/trails cover:	The policy to extend to provide indemnity for the cost of any repeated and/or subsequent tests and/or trials necessarily carried out as a result of Damage to the insured property
75.	Non-Invalidation Clause	
76.	Waiver of Betterment Clause	
77.	Partial Occupancy Clause	
78.	Basis of Claim Settlement on Reinstatement Value basis	Covered

General Exclusions:

1. Institute Radioactive Contamination, Chemical, Biological, Bio-Chemical and Electromagnetic Weapons Exclusion Clause
2. War & Terrorism Exclusion
3. Nuclear Energy Exclusion Clause
4. Sanctions and limitation clause (LMA 3100)
5. Communicable Disease Exclusion
6. Exclusions of crops, Forests and Cultures
7. Cyber Attack Exclusion Clause
8. Political Risks Exclusion Clause
9. Total Asbestos Exclusion Clause
10. Exclusion of ALOP

Date of Proposal and Declaration : 01/11/2025

IN WITNESS WHEREOF, the undersigned being duly authorised has hereunto set his/her hand at LCB DELHI 500300 on this 18th day of November, 2025 .

For and On behalf of
United India Insurance Co. Ltd.

Affix Policy Stamp here.

GENERAL

CONDITIONS

OF

CONTRACT

FOR GOODS

1. DEFINITIONS

1.1 **"PLL" or "Owner"** shall mean Petronet LNG Limited, a Company incorporated in India and registered under the provisions of the Companies Act 1956, having its registered office at World Trade Centre, Babar Road, Barakhamba Lane, New Delhi – 110001.

1.2 **"Vendor" or "Seller" or "Supplier"** shall mean the Contractor / bidder / tenderer selected for carrying out the stated work as per the terms and conditions of this tender document and shall include its successors and permitted assigns.

1.3 **"Contract" or "Purchase Order"** shall mean Letter of Award / Acceptance which defines the scope of the engagement and the Goods to be delivered by the Vendor as well as the price schedule for the said Goods and all attached exhibit(s) and document(s) referred to therein along with all the terms & conditions mentioned therein together with all and any subsequent modification(s) thereto.

1.4 **"Contract Price"** shall mean the price payable to the Vendor under the Contract for the full and proper performance of his contractual obligations.

1.5 **"Vendor's / Seller's / Supplier's Representative"** means the person appointed from time to time by the Vendor for execution of the Contract.

1.6 **"Goods"** shall mean articles, materials, equipment, design and drawings, data and other tangible or intangible property to be supplied by Seller to complete the contract.

1.7 **"Officer in Charge" (OIC) or "Engineer in Charge" (EIC)** shall mean the Officer / Engineer for the time being nominated by the Owner and specified in the respective Purchase Order.

1.8 **"Site"** shall mean the site location of as defined in the Tender document, where the supply of goods are required to be effected.

2A MISCELLENEOUS PROVISIONS:

i. Notwithstanding the subdivision of the document into these separate sections and volumes every part of each shall be deemed to be supplementary to and complementary of every other part and shall be read with and into the Contract so far as it may be practicable to do so.

ii. Wherever any portion of the Instructions to the Bidder is repugnant of or at variance with any Conditions of Contract, then the provisions of the Conditions of Contract shall be deemed to override the provisions of the Instructions to Bidders and shall prevail to the extent of such repugnance or variations.

iii. Wherever it is mentioned in the Tender Documents that the Vendor shall perform certain work or provide certain facilities, it is understood that the Vendor shall do so at his own risk and cost, being deemed to be part of the relevant items in the Schedule of Rates whether expressly stated or not.

2B INTERPRETATIONS & PRIORITY OF CONTRACT DOCUMENTS

i. Once the contract is confirmed and signed, the terms and conditions contained therein shall take precedence over the Vendor bid and all previous correspondence/s if any. The documents forming the Contract are to be read together and interpreted as mutually explanatory of one another (to the extent available in the Tender document / Contract). If there is a direct inconsistency in specific obligation(s), then for the purposes of interpretation, and unless otherwise provided in the Contract, the priority of the Contract documents shall be in following order:

a. The Contract Agreement (wherever applicable)
b. Letter of Acceptance along with its enclosures
c. Scope of Works/ Job Specifications (specific to particular job only, wherever provided)
d. Special Conditions of Contract (SCC)
e. Technical Specifications (wherever applicable)
f. General Conditions of Contract (GCC)
g. Instructions to Bidders (ITB)
h. Other Documents, if any.

ii. Words importing the singular number include the plural and vice versa and words importing gender include the masculine, feminine and neuter genders. Unless the context otherwise requires, any reference to a "party" herein is a reference to a party hereto.

3. GENERAL OBLIGATIONS OF THE VENDOR

3.1 The Vendor shall, in accordance with and subject to the terms and conditions of this Contract, supply the Goods in accordance with the Scope of Work / Specifications of the Contract and carry out its obligations with all due diligence, professional skills, care and efficiency in accordance with generally accepted professional techniques and practices.

3.2 The Vendor shall observe sound management practices and employ appropriate advance technology and safe methods while procuring and supplying the Goods that shall be fit for the purpose for which the same are intended and as specifically provided under the Contract.

3.3 The Vendor shall be liable for the stamp duty or any other payments legally payable in respect of this contract as per applicable laws.

4. VENDOR's REPRESENTATIVE & PERSONNEL

4.1. Vendor shall nominate a person (*"Vendor's Representative"*) who shall be responsible for and authorized to represent it at all times during the term of the Contract and to receive and to act on any request made by PLL or its representative in performance of any obligations as per the terms of this Contract.

4.2. PLL shall be at liberty to object to any nomination in respect to clause 4.1 and may require Vendor to replace, immediately such person by a competent substitute, at no extra cost to PLL.

4.3. The Vendor's Representative shall take instructions from OIC for the proper coordination and timely performance of obligations under the terms of the Contract.

4.4. The Vendor's Representative shall have to be duly authorized by the Contractor to act or take decision as and when required, on behalf of Vendor under the Contract.

5. CONFIDENTIALITY

5.1 The Vendor shall treat all matters, communications, instructions given during the term and in relation to the Contract , strictly confidential and undertakes not to disclose, any information, documents, technical data, experience and know-how shared/exchanged /given to him without the prior written permission of PLL.

5.2 The Vendor further undertakes to limit the disclosure/access to the confidential information as mentioned above, only to those of its employees, Implementation Partners etc. who reasonably requires the same for the proper performance of the Contract, provided however that the Vendor shall ensure that each of employees/ Implementation Partner ,with whom the information has been shared , is informed of the confidential nature of the said information and obligations of its nondisclosure.

6. PERFORMANCE BANK GUARANTEE {Not Applicable for OEM & Proprietary Services and Contract Value less than INR 7 Lakhs (exclusive of GST)}

6.1 Successful bidder / Vendor shall submit Performance Bank Guarantee from a scheduled commercial bank as per format provided in the Tender document, for the amount equivalent to 10% of the total Contract Value (exclusive of taxes and duties) within 30 days from the date of placement of Purchase Order.

6.2 Performance Bank Guarantee shall be kept valid by the Vendor at his cost for 90 days from the last date of the term of the Contract and Warranty and shall be extended from time to time (if so required). It is specifically agreed that no interest shall be payable by PLL on the said Performance Bank Guarantee.

6.3 The Performance Bank Guarantee shall cover the entire Contract value including extra jobs / services if any. Further as long as the PBG submitted by Vendor, at the time of award of

the Contract, take care of the extra jobs / services, if any, executed and total executed value are within the awarded Contract price, there is no need for the Vendor to furnish an additional PBG. However in case the total executed value is or is likely to exceed the ceiling of awarded Contract Value, the Vendor shall furnish additional PBG equivalent to 10% of the exceeded value of the contract.

6.4 The Company shall have unqualified option under this guarantee to invoke the Performance Bank Guarantee for warranty and/or claim amount thereunder in the event of Vendor / Supplier failing any of the obligations entered into under this Contract or in respect of any amount due from the Vendor / Supplier to PLL.

6.5 Failure of the Vendor to comply with the requirements under this Clause for submission of PBG, of requisite amount, within 30 days of issuance of Purchase Order, shall constitute sufficient ground for the annulment of the award, the forfeiture of Bid security and to invoke any other legally permissible actions or remedies available to the PLL.

6.6 For itemised annual rate contract, if the duration of Contract is for more than one year, the Vendor shall provide, a PBG of amount equivalent to 10% of one year contract price, however the validity of the PBG under this clause shall be three months beyond Warranty Period or Contract Period whichever is later.

7. SUSPENSION OF THE PREFORMANCE OF THE CONTRACT

7.1 PLL may suspend, by giving an advance 15 days written notice (notice of suspension), in whole or in part (if possible) –performance of the contract by the Vendor at any time.

7.2 Vendor shall, after receipt of notice of suspension, suspend immediately the supplies of Goods and reduce the expenditure, if any, to a minimum level as agreed between the parties.

7.3 Upon suspension of the performance of supplies, the Vendor shall be entitled for the reimbursement of the costs which shall have been actually incurred prior to the date of such suspension. However, the total reimbursement shall be restricted to contract price.

7.4 By fifteen days prior notice, PLL may request the Vendor to resume the performance of the supplies, without any additional cost to PLL.

7.5 If the period of suspension of the supplies exceeds six months, either party shall be entitled to terminate the Contract according to clause 8 hereunder.

8. TERMINATION

(i) TERMINATION ON EXPIRY OF THE CONTRACT

This Contract shall be deemed to have been automatically terminated on the expiry of the term of the Contract , unless the same is terminated prior to the same in accordance with the other provisions of the contract and unless the Owner has exercised its option to extend this Contract in accordance with the relevant provisions, if any, of this Contract.

(ii) TERMINATION ON ACCOUNT OF FORCE MAJEURE

Either party shall have the right to terminate this Contract on account of Force Majeure, in accordance with clause no this General conditions of the Contract as set forth below.

(iii) TERMINATION ON ACCOUNT OF INSOLVENCY

In the event, the Vendor or its collaborator at any time during the term of this Contract becomes insolvent or makes a voluntary assignment of its assets for the benefit of creditors or is adjudged bankrupt by the court of competent jurisdiction, then the Owner shall be entitled to terminate this Contract , by giving a notice in writing, and all the rights and privileges of Vendor shall stand terminated with immediate effect after two (2) weeks of receipt of said notice by the Contractor / Vendor.

(iv) TERMINATION FOR UNSATISFACTORY PERFORMANCE

If the Owner considers that the performance of the Vendor is unsatisfactory or, is not in accordance with the terms of Contract, the Owner shall notify the Vendor in writing of its unsatisfactory performance along with the detailed reason thereof. The Owner shall then have the option to terminate this Contract by giving a 30 days written notice to the Vendor, if the Vendor fails to cure the reason for that unsatisfaction and /or comply with any requisitions contained in the said written notice given by the Owner.

(v) TERMINATION FOR CONVENIENCE

Notwithstanding anything contained in the Contract, the Owner may, by giving a 30 (Thirty) days written notice, terminate the Contract in whole or in part, if so desires.

In case of such termination, the obligation of the Owner to pay, shall be limited to the extent of price of Goods supplied by the Vendor and which has been duly received by the Owner, as per the provisions of the Contract, up to the date of notice of termination, subject to the Contactor complying with other provisions of the Contract.

(vi) CONSEQUENCES OF TERMINATION AND AMOUNT PAYABLE

In all cases of termination herein set forth, obligation of the Owner to pay, shall be limited to the extent of agreed price of Goods supplied by Vendor as per provision of the Contract up to the date of notice of termination, subject to the Vendor complying with other provisions of the Contract. Notwithstanding the termination of the Contract, the parties shall

continue to be bound by the provisions of this Contract that reasonably require some action or forbearance after such termination.

9. FORCE MAJEURE

In the event of either party being rendered unable by the events which are beyond the control of the party (Force Majeure events) to perform any obligation required to be performed under this Contract, the relative obligation of the party affected by such Force Majeure event shall be suspended, for the period during which such event lasts, subject to a maximum period of 60 days (it is for reference only and will be decided on the basis of duration of Contract), after which both the parties shall be entitled to terminate the Contract by giving not less than 15 days' written notice without any liability for termination.

Upon the occurrence of any such event(s) the party claiming the Force Majeure, shall notify the other party in writing as soon as practicably possible of the occurrence of such Force Majeure event and also the ending of the said Force Majeur event, in writing, not later than 72 hours of the occurrence / ending of the such event.

Force Majeure shall mean and include the following:

(a) War / Hostilities
(b) Riot or Civil Commotion
(c) Earthquake, Flood, Tempest, Lightning, Epidemic, Pandemic or Other Natural Disaster notified or not by the Govt authorities.
(d) Restrictions imposed by the Government or Other Statutory Bodies, which prevents or delays the execution of the order by the Vendor.
(e) Lawful Strikes and Lockouts.

10. PRICE REDUCTION SCHEDULE (PRS) {Not Applicable for OEM and Proprietary services and Contract Value less than INR 7 Lakhs (exclusive of GST)}

10.1 In case the Vendor fails to complete the Supplies of Goods within the stipulated period, then, unless such failure is due to Force Majeure event as defined in Clause herein above or due to established default by PLL or its employees, the total Value of Contract shall be reduced by ½ (half) % of the total Value of Contract per week of the period of delay or part thereof subject to a maximum of 5 (five) % of the total Value of Contract, by way of reduction in price for total period of delay.

10.2 The portion of supply completed in all respect which is being used for commercial operation shall not be considered for applying Price Reduction Schedule, if delivered within contractual delivery period.

10.3 The decision of the OIC with respect to applicability of Price Reduction Schedule shall be final and binding on the Vendor.

10.4 The Price Reduction will be calculated on the basis of total Value of Contract / executed Value of Contract (as the case may be) exclusive of taxes and duties.

10.5 As per clause 10.1 above, in case of delay in the execution of Contract the Vendor shall raise invoice for reduced value as per Price Reduction Clause. However, in case Vendor has raised the invoice for the full value of the contact, then Vendor shall issue a Credit Note towards the applicable Price Reduction amount.

10.6 In case Vendor fails to submit the invoice for reduced value or does not issue credit note as mentioned above, PLL will release the payment to Vendor after by reducing the amount after applying Price Reduction Schedule clause with corresponding reduction of taxes or PLL shall be at liberty to opt for Set-off, adjustment or deduction of the said amount along with applicable taxes, penalties, interest, if any, from any amount due for payment to the Vendor or security deposit, if any, lying with PLL, in future to the him under this contract.

10.7 In the event of any financial implication arises on PLL due to issuance of invoice without reduction in price or non-issuance of Credit Note, the same shall be to the account of Vendor and Vendor shall indemnify PLL to that effect.

11. MODIFICATION

During the performance of the Contract, OIC / PLL may make a change within the general scope of this Contract including, but not limited to, changes in methodology and minor additions to or deletions from the Work or with respect to technical and/or commercial aspects including terms of delivery and Vendor shall render the service as changed. Changes of this nature will be affected by a written order (i.e. Amendment) by the PLL. The time of completion of the said job may be extended for the part of the particular job at the discretion of OIC, for only such alterations or substitutions of the Works, as he may consider just and reasonable.

Issuance of acceptance or otherwise in such cases shall not be a ground for extension of agreed delivery date and also shall not affect the performance of contract in any manner except to the extent mutually agreed in writing between the parties , through an amendment of contract. PLL shall not be bound by any conditions or provisions in the Vendor's Bid Forms or acknowledgment of Contract, invoices, packing list and other documents which purport to impose any conditions at variance with or supplemental to the Contract.

Any modification of or addition to the contract shall not be binding unless mutually agreed and made in writing between both the parties.

12. COMPLIANCE OF LABOUR LAW CODES

The Vendor shall comply with all the relevant labour Laws/Codes/Regulations/ rules as amended upto date, applicable to the Vendor's Personnel, including Laws relating to their employment, health, safety, welfare, immigration and emigration. The Vendor shall require its employees to obey all applicable Laws, including those concerning safety at work.

13. ASSIGNMENT / SUBLET

13.1 The Vendor shall not, save with previous written consent of the OIC or unless the same has been expressly specified in the Contract, sublet, transfer or assign the Contract or any obligations on the part of Vendor thereof or interest therein or benefit or advantage thereof in any manner whatsoever to any third party, without prior permission of PLL.

Provided, nevertheless, that any such permission given by PLL shall not relieve the Vendor from any obligation, duty or responsibility under the Contract.

13.2 This is pertinent to mention here that the basic scope of Contract cannot be sublet in any case. However, on specific request of the Vendor and subject to written permission of PLL, the Vendor may sublet the allied / incidental jobs related to the contract. Such permission shall not relieve the Vendor from any obligations, duty or responsibility under the Contract and Vendor shall be fully responsible for the same hereunder for the execution and performance of the Contract.

13.3 Sub-letting of entire Contract is specifically prohibited and an undertaking to this effect shall always be given by Vendor along with each invoice / bill.

14. NOTICE

14.1 **TO THE VENDOR:** Any notice to be given to the Vendor or his duly authorised representative under the terms of the Contract may be served by PLL by e-mail or through registered post / Courier at the address / contact information furnished by the Vendor. Proof of issue of any such notice shall be a conclusive evidence of the Vendor having been duly informed of all contents therein.

14.2 **TO PLL:** Any notice to be given to the OIC of the Owner under the terms of the Contract may be served by the Vendor, by e-mail or delivering the same through registered post / Courier at the respective site office.

14.3 A notice shall be effective when delivered or on the date mentioned in notice whichever is later.

15. INTELLECTUAL PROPERTY RIGHTS

The Vendor shall not, in supplying goods under this Contract, knowingly infringe or misappropriate any intellectual property right of a third party, and will take reasonable actions to avoid infringement. The Vendor shall protect , hold harmless , defend and indemnify PLL from and against any claim, lawsuit, or other proceeding, loss, cost, liability, or expense (including court costs and reasonable fees of attorneys and other professionals) to the extent arising out of: (i) any third party claim that a deliverable infringes any patent, copyright, trade secret, or other intellectual property right of any third party; or (ii) any third party claim arising out of the negligent or other tortious acts or omissions by the Vendor or its employees, subcontractors, or agents in connection with or related to the Vendor or the Vendor's performance under this Contract.

16. EXECUTION OF CONTRACT

All the Goods shall be supplied in strict conformity with the provisions of the Contract and with such explanatory detailed specification and instruction as may be furnished from time to time to the Vendor by OIC to the satisfaction of PLL and accept full responsibility for the satisfactory quality of such Goods supplied by them.

Any error in description and any omissions therefrom, shall not vitiate the Contract or release the Vendor from the execution of the whole or any part or any of his obligations under the Contract.

17. INSPECTION, TESTING & EXPEDITING

17.1. PLL or its representative shall have the right to inspect and / or test the goods to confirm their conformity to the contract specifications. The inspection & tests shall be conducted on the premises of the seller at the point of delivery and / or at the goods final destination. All reasonable facilities & assistance including access to drawings & production data shall be furnished by seller to PLL free of cost. PLL shall bear all the cost towards Boarding and lodging of PLL personnel visiting Seller's/ Vendor's premise of facility for inspection and expediting purpose.

17.2. Preliminary inspection at Seller's works shall not prejudice Purchaser's claim for rejection of the Goods on final inspection at Site or claims under warranty provisions.

17.3. If the Goods are not of specification or fails to perform specified duties or are otherwise not performing to the satisfaction of PLL, then PLL shall have the right to reject the Goods or parts thereof and ask for free replacement of the same within reasonable time failing which, PLL shall obtain the Good from some third party to fulfil its requirements at Seller's cost and risk.

17.4. Nothing in this clause shall be deemed to deprive PLL and/or affect any of its rights under the Contract which it may otherwise have in respect of such defects or deficiencies or in any way relieve the Vendor of his obligations under the Contract.

17.5. Goods rejected by the Purchaser shall be removed by the Seller at his own cost within 14 days (in case of dangerous, infected, corrosion-prone and perishable materials within 8 hours) of notice after repaying the amounts received against the supply. PLL shall in no way be responsible for any deterioration of or damage to the Goods under any circumstances whatsoever.

In case of rejection of Goods, Purchaser shall have the right to recover the amounts, if any, from any of Seller's invoices pending with Purchaser or by alternative method(s). The Purchaser shall also be entitled to recover handling and storage charges for the said period, during which rejected materials are not removed by the Vendor @ 5% of the value of materials for each month or part of a month till the rejected materials are finally disposed off.

18. TRANSIT RISK INSURANCE

i. All equipment(s) / material(s) shall be insured by Vendor for all transit risks up to unloading at PLL site unless specified otherwise in the Purchase Order, to cover the damages during the transportation and handling of Goods.

ii. Any damage during the transportation shall be immediately notified by PLL to Vendor as well as the transporter on receipt of goods, for further necessary action for recovery of transit damages.

19. TRANSPORTATION

i. Unless specifically specified in the Tender document, the Vendor shall supply the Goods on Carriage and Insurance Paid (CIP) / Delivered at (DAP) basis.

ii. Where the Vendor is required under the Contract to deliver the Goods on the other modes of delivery viz. Freight on Board (FOB) / Free Carrier (FCA) / Free Alongside (FAS) / Cost and Freight (CFR) / Cost, Insurance and Freight (CIF) / Delivered duty paid (DDP) etc., the responsibility of Vendor shall be to arrange for transportation of goods from their works as per standard practice defined under INCOTERMS 2020.

20. WARRANTY

The Vendor shall warrant that everything to be supplied under the contract shall be free from all defects and faults in material, workmanship and manufacturing defects and same shall be of the highest grade and consistent with the established and generally accepted standards of the materials of the type supplied and in full conformity with the specifications drawings or samples, if any, and shall if operable, operate, properly. This warranty shall survive inspection and acceptance of the goods but shall expire 12 months from the date of commissioning / operations or 24 months from the date of dispatch, whichever is earlier.

21. INVOICE

In case where documents are not routed through Bank, original plus one copy of invoice shall be directly sent to OIC immediately after dispatch with copies to purchaser and the consignee mentioned in Contract / Purchase Order. Invoice must bear the Purchase Order no. with date and should also indicate the dispatch particulars. It may be noted that the documents will be retired only if the dispatches are made as per the terms of the Purchase Order.

22. PACKING & MARKING

While dispatching ordered stores, it will be the responsibility of the Vendor to properly pack the consignment so as to enable its delivery at destination free from loss, damage or

pilferage. Each packing must contain a list of stores ("Packing List") packed therein. Each packing / bundle must be prominently marked with order no. and packing no. & consignee name & address.

23. DESPATCH DOCUMENTS

The Vendor will intimate dispatch particulars to PLL through e-mail at the time of dispatch of goods.

The dispatch documents shall consists of Invoice, Challan, Packing List, GR/LR, inspection/ Test Certificate and any other document(s) as mentioned in the P.O. Copies of dispatch documents should reach PLL well in advance failing which any demurrage / wharfage etc. incurred on account of late / non-receipt of dispatch document / wrong dispatches of consignment will be recovered from supplier. In case of documents through Bank, it may be noted that the documents will be retired only if the dispatches are made as per the terms of the Purchase Order.

24. REPEAT ORDER

PLL reserves the right within six months of order, to place repeat order up to 50% of the total order value without any change in unit price or other terms and conditions of the contract.

25. RECOVERY OF SUMS DUE

All costs, damages or expenses which the PLL may have suffered, for which under the Contract, Seller is liable, may be recovered by the PLL (he is hereby irrevocably authorized to do so) from any money due to or becoming due to the Vendor under this Contract or other Contract and / or may be recovered by action at law or otherwise if the same due to the Vendor is not sufficient to recover the recoverable amount, the Vendor shall pay to the PLL, on demand, the balance amount.

26. PAYMENTS ETC. NOT TO AFFECT RIGHTS OF THE PLL

No sum paid on account by the PLL nor any extension of the date for completion granted by the PLL shall affect or prejudice the rights of the PLL against the Vendor or relieve the Vendor of his obligation for the due fulfilment of the Contract.

Losses due to non-compliance of Instructions, losses or damages suffered by PLL owing to the Vendor's failure to adhere to any of the instructions given by the PLL in connection with the order execution shall be recoverable from the Seller.

27. CUT-OFF DATES

No claims or correspondence on this Order shall be entertained by the PLL after 90 days after expiry of the performance guarantee (from the date of final extension, if any)

28. FALL CLAUSE

28.1. The price charged for the materials supplied under the Contract by the Vendor shall in no event exceed the lowest price at which the Vendor or his agent/principal/dealer, as the case may be, supplies the materials of identical description to any Persons/Organizations including the Purchaser or any Department of the Central Govt. or any Department of a State Govt. or any Statutory Undertaking of the Central or State Govt. as the case may be, during the term of the Contract.

28.2. If at any time during the said Term , the Vendor or his agent/principal/dealer, as the case may be, reduces the sale price, sells or offers to sell such materials to any persons/organizations including the Purchaser or any Deptt. Of Central Govt. or State Govt. as the case may be, at a price lower than the price chargeable under the Contract, he shall forthwith notify such reduction or sale or offer of sale to the PLL and the price payable under the Contract for the Goods supplied after the date of coming into force of such reduction or sale or offer of sale shall stand correspondingly reduced.

28.3. The supplier shall furnish the following certificate to PLL along with each bill for payment for supplies made against this order: - "I/We certify that there has been no reduction in sale price of the items/goods/materials of description identical to those supplied to the PLL under the order herein and such items/goods/materials have not been offered/sold by me/us to any person/organizations including the Purchaser or any Deptt. of Central Govt. or any Deptt. of State Govt. or any Statutory Undertaking of the Central or State Govt. as the case may be upto the date of bill/during the Term of this Contract whichever is later, at a price lower than the price charged to the PLL under the Contract".

29. INDEMNITY AND INSURANCE

The Vendor shall purchase and maintain at his cost, such insurance as will protect the parties from any claim which may arise out of or result from the Vendor's performance of its obligations or otherwise under the Contract, whether such claim may arise due to action or omission by the Vendor or a Sub-Vendor or by anyone directly or indirectly contracted or used by any of them, or by anyone for whose acts any of them may be liable.

All policies of insurance referred to in this Clause shall be endorsed to specify that they are primary to and not excess to or on a contributing basis with any insurance or self-insurance maintained by Owner and Vendor (and their respective Affiliates) or any Sub Vendors in respect of losses arising out of or in connection with the Work.

Further, the Vendor shall indemnify and keep indemnified PLL and its every member, officer and staff against all actions, proceedings, claims, costs and expenses whatsoever in respect of or arising out of any failure or default by the Vendor in due performance of its obligations under this Contract.

The Vendor shall undertake to provide comprehensive accident insurance coverage in respect of every employee employed by it for carrying out PLL's job.

The Vendor hereby agrees to indemnify and keep indemnified PLL and its employees, in case PLL faces any legal actions, proceedings, claims, costs, expenses, damages, loss on account of breach, if any, terms and conditions of the Contract including infringement of IPR by the Vendor.

30. TAXES AND DUTIES

30.1. Unless otherwise specified in the NIT / Tender document, all duties, taxes and other levies including cess on all duties, taxes and other levies (excluding GST) payable by the Vendor under the Contract shall be included in the schedule of prices submitted by the Vendor as per format.

30.2. The monthly bill in duplicate will have to be submitted by the Vendor to the OIC at the rates specified and the payment will be made after verification of the same. On no account any extra payment whatsoever will be made to the Vendor for this contract. The bills should be supported by copies of payment including statutory payments in respect of each personnel engaged by the Vendor.

30.3. The Vendor shall be fully and exclusively responsible for the payment (and liable for all consequences in the event of default) of all contribution and taxes for unemployment compensation, insurance and old age pensions and amenities now or hereafter imposed by any law of the Government / local bodies which are imposed with respect to or covered by the wages, salaries or other compensation paid to the persons employed by the Vendor.

30.4. After award of work, GST as applicable shall be paid by PLL to the Vendor based on the Taxable invoices issued by the Vendor.

30.5. PLL shall accept only E-Invoice compliant invoices, in case the provisions are applicable.

30.6. TDS along with surcharge as applicable at the prevailing rate on the gross amount billed shall be deducted from the Vendor's invoice as per applicable laws.

30.7. Change in Law

If at any time any change in Indian Law causes an imposition of any new tax in India, that was not in existence as on Bid Submission Date / Date of Letter of Award (LoA), which is applicable to the Vendor under this Contract, then either Party may request a revision of the payments made or to be made to Vendor under this Contract. Either Party, as the case may be, shall provide notice to the other Party of such request setting forth the proposed amount along with relevant details and calculations relating to, such change.

The Parties shall promptly , but in no case later than fifteen (15) days from the date of such written request, discuss in good faith and mutually agree to revise the payments pursuant to such change along with the basis of such revision and the effective date of such revision.

For avoidance of any doubt, it is clarified that any new tax shall be to the account of PLL. Similarly, the benefit of any decrease in the corporate tax rates shall be passed on by the Vendor to PLL. either by way of refund or an adjustment in the payments due and payable to Vendor in accordance with this Contract.

31. UNETHICAL PRACTICES

31.1 The Vendor represents, warrants and agrees that no Person has been retained or employed to solicit this Contract upon any arrangement or understanding for the payment of any commission, fee or other compensation of any kind, except for compensation to bona fide employees of the Vendor.

31.2 The Vendor further represents and warrants that neither it nor any of its Affiliates nor any of its or their respective personnel have made, received, provided or offered and the Vendor agrees that neither it nor any such other entity or Person shall make, receive, provide or offer, any gift, entertainment, payment, loan or other consideration for the purpose of influencing any person to any course of conduct in any way relating to or affecting this Contract.

31.3 Without in any way limiting the nature of breaches which could constitute 'material breaches' of this Contract / LOA for the purposes of clause 8 of GCC, Parties hereby expressly agree that breach of the foregoing representations and warranties shall constitute a material breach of this Contract and shall give Owner the right to immediately terminate this Contract pursuant to Clause 8 of GCC.

32. DISPUTE RESOLUTION

32.1. In the event of a dispute between the Owner and the Vendor regarding , arising out of, relating to or in connection with this Contract, including, its application, interpretation, breach, termination, validity or invalidity (a **"Dispute"**), prior to the initiation of any legal action or proceeding (but only in accordance with and as permitted by this Contract) in relation to a Dispute, the OIC and the Vendor's Representative shall, upon the written request of either the Owner or the Vendor (a **"Request"**), use their best efforts in good faith to reach at a reasonable and equitable resolution in relation to the Dispute.

32.2. If the OIC and Vendor's Representative are unable to resolve the Dispute within thirty (30) days of receipt by either Party of a Request, either Party may by a written notice (a "**Notice**"), refer the matter for resolution by good faith negotiation between their respective senior officers with appropriate decision making powers and who shall not have had any substantive involvement in the matters related to the Contract, unless the Parties otherwise agrees.

32.3. If the senior officers are unable to resolve the Dispute within thirty (30) days of receipt by either Party of a Notice (or such other period as may be mutually agreed), either Party may resort to the other Dispute resolution provisions.

32.4. The Parties agrees to use their best efforts to resolve all Disputes promptly, amicably, equitably and in good faith.

33. ARBITRATION {Applicable for Contract Value more than INR 2 Crores}

In case the dispute is not resolved as mentioned above, the same shall be referred to Arbitration comprising of an Arbitration Tribunal of three arbitrators, of whom each Party shall nominate one arbitrator. The third arbitrator (who shall act as Presiding Arbitrator) shall be nominated by the two arbitrators, nominated by the Parties.

The arbitration shall be conducted in accordance with the provisions of the (Indian) Arbitration and Conciliation Act, 1996 ("Act") as amended from time to time. The venue of arbitration shall be in New Delhi, India and proceedings shall be conducted in English language.

The Award of the arbitral tribunal shall be final and binding upon the Parties.

Notwithstanding the fact that settlement of dispute(s) (if any) under arbitration may be pending, the parties hereto shall continue to be governed by and perform the work in accordance with the provisions under this Contract.

34. JURISDICTION AND APPLICABLE LAW

This Contract including all matter connected to this Contract, shall be governed by the laws of India and shall be subject to exclusive jurisdiction of the courts of New Delhi.

35. LICENSE / CERTIFICATE / CONSENT / APPROVAL {IF APPLICABLE}

Seller shall procure, at his expense, all necessary permits, certificates and licences required by virtue of all applicable laws, codes, regulations, ordinances and other rules in effect at the place where any of the work is to be performed, and Seller further agrees to hold PLL harmless from liability or penalty which might be imposed by reason of any asserted or established violation of such Codes, laws, regulations, ordinances or other rules. PLL will provide necessary permits for Seller's personnel to undertake any work in India in connection with Contract.

The consent / approval / license / certificate for carrying out the work from the concerned authority shall be kept valid for the entire duration of the contract and it shall be the sole responsibility of the Vendor / bidder to maintain / renew the validity of the such consent / approvals thereunder from time to time, failing which it may lead to cancellation of contract.

36. LIMITATION OF LIABILITY

Notwithstanding anything contrary contained herein, the aggregate total liability of Supplier to Employer under the Contract shall not exceed the Total Contract Value, except that this clause shall not limit the liability of the Supplier for following:

(a) In the event of breach of any Applicable Law;

(b) In the event of fraud, wilful misconduct or illegal or unlawful acts, or gross Negligence of the Supplier or any person acting on behalf of the Supplier; or

(c) In the event of acts or omissions of the Supplier which are contrary to the most elementary rules of diligence which a conscientious Supplier would have followed in similar circumstances; or

(d) In the event of any claim or loss or damage arising out of infringement of Intellectual Property; or

(e) For any damage to any third party, including death or injury of any third party caused by the Supplier or any person or firm acting on behalf of the Supplier in executing the job.

However, neither party shall be liable to the other Party for any indirect nor consequential loss or damage like loss of use, loss of profit, loss of production or business interruption which is connected with any claim arising under the Contract.

37. COMPLIANCE OF PLL INSIDER'S TRADING

By virtue of association / engagement with Petronet LNG Limited (PLL), it is likely that certain Unpublished Price Sensitive Information (UPSI) as defined under "Code for Prevention of Insider Trading in the Securities of PLL" (hereinafter called Code), copy of which is hosted on the website of the company www.petronetlng.com, that is not generally available and which upon becoming generally available is likely to materially affect the price of the securities issued by PLL, might be shared with you / your organization. It is hereby cautioned that you or any of your team members or immediate relatives thereof or your organization, should not trade in the securities of PLL while in possession of such UPSI or communicate such UPSI to any person except in furtherance of legitimate purposes (as defined in the Code), performance of duty or discharge of legal obligations. Any trades in securities of PLL, directly or indirectly, while in possession of any UPSI would be presumed to have been motivated by the knowledge and awareness of the UPSI and the onus to prove that trades were executed otherwise would be on you or any of your team members or your organization as the case may be. It is therefore advised that all concerned as stated above must familiarize himself/themselves with the "Code for Prevention of Insider Trading in the Securities of PLL", copy of which is hosted on the website of the company.

Accordingly, it must be ensured that any UPSI, whenever received from the company:

(a) shall be used solely for the purpose for which it is being disclosed;
(b) shall be preserved and the secrecy of such information shall be maintained;
(c) shall not be disclosed to any third party;
(d) shall be kept securely and properly protected against theft, damage, loss and unauthorized access (including access by electronic means) by deploying means similar to those being used to secure its own confidential information;
(e) to notify PLL immediately upon becoming aware that any of the confidential information has been disclosed to or obtained by a third party.

It may be noted that any violation in dealing with UPSI shall be considered as breach of terms of engagement / Contract and PLL shall take necessary action for such breach in addition to reporting to SEBI for taking necessary action under SEBI (Prohibition of Insider Trading) Regulations, 2015 or subsequent amendments thereof. Further, SEBI may take any

action including levy of penalty etc. as per SEBI Regulations in this regard in case of any violation in dealing with UPSI at your end.

38. PROCEDURE FOR PUTTING AN AGENCY ON HOLIDAY AND BANNING LIST

Procedure for putting an agency on Holiday and Banning list is enclosed at Attachment-I .

39. PROCEDURE FOR EVALUATION OF PERFORMANCE OF VENDORS/ CONTRACTORS/ CONSULTANTS

Procedure for evaluation of performance of Contractor is enclosed at Attachment-II

Attachment-I

PROCEDURE FOR PUTTING AN AGENCY ON HOLIDAY AND BANNING LIST

DEFINITION:

"Agency" shall mean Bidder / vendor / Contractor / Supplier / Consultant of Petronet LNG Limited (PLL).

"Corrupt practice" means the offering, giving or soliciting of anything of pecuniary advantage value to improperly influence by abuse of entrusted power, the procurement process or in contract execution.

"Fraudulent practice" includes any act or omission committed by an agency / entity by misrepresenting, misleading/submitting false document and or false information or concealment of facts in order to influence the procurement process as well as during the execution of contract.

"Collusive practice" amongst bidders means a scheme or arrangement designed to establish bid prices at artificial non-competitive level and to deprive PLL of the benefit of free and open competition.

"Coercive practice" means impairing or harming or threatening to impair or harm directly or indirectly, any agency or its property to influence the improper actions of an agency, obstruction of any investigation or auditing of a procurement/contract process.

A. INTRODUCTION:

In the course of the bidding / contracting (procurement, works and service contracts), agencies (bidder(s) / vendor(s) / supplier(s) / contractor(s) / consultant(s)) are expected to adopt ethics of highest standards and a high degree of integrity, safety & quality consciousness, commitments and sincerity towards terms and conditions of the tender(s) / order (s) undertaken. Any aberration, deviation and violation from the expected behaviour of the Agencies need to be dealt appropriately by putting the Agencies on holiday or banning list for specific periods so that it becomes a deterrent for all the future transactions.

1. HOLIDAY LIST

An Agency may be put in the Holiday list in case if:

a. It has refused to accept LOA/LOI/Purchase order/contract (order value 10 Lakhs and above) after the same is issued within the period of Bid validity and as per agreed terms & conditions or,

b. The materials supplied by the Agency are found to be defective and fails to perform during its use/operation. Premature failure of the work executed by contractor/failure of equipment during the operation, and not giving the desired result as per provision of the contract or,

c. The rating of the vendor/ consultant come to be POOR as per Procedure For Evaluation Of Performance Of Vendors/ Contractors/ Consultants

d. It is declared or is in the process of being declared bankrupt, insolvent, wound up, dissolved or partitioned; or

e. It persistently violates provisions of labor laws/ regulations / rules, safety norms, environmental norms or other statutory requirements; or

2. BANNING LIST

Any Agency can be put in the Banning list in case if:

a. if it is involved in an instance of Corrupt, Fraudulent, Collusive and Coercive practice against PLL.

b. it is involved in fraudulent activity, wilful misconduct, misrepresentation, mis-declaration, security considerations or,

c. it has indulged in any type of forgery or falsification of records; or

d. the proprietor of the firm, its employee(s), partner(s) or representative(s) is / are convicted by a court of law for offences involving moral turpitude in relation to business dealings.

e. There is strong justification for believing that the proprietor or employees or representatives of firm have been guilty of malpractices such as bribery, corruption, fraud, substitution of tenders, interpolations, misrepresentation, evasion or default in payment of any tax levied by law.

B. DELETED

C. Procedure To Be Followed For Irregularities Observed At Various Stages

1. Irregularities noticed during Bidding Process:

If any irregularity mentioned in Clause A.2 is observed during bidding process/ bids evaluations stage the bid of such Bidder (s), it shall be rejected after due approval from the competent authority and following the due procedure.

In case the irregularities are found to be true the EMD/ Bid security of such Bidder shall be forfeited.

2. Irregularities noticed after award of contract

(i) During execution of contract:

In case irregularities are found to be true the contract shall be suspended with immediate effect.

The Agency shall be banned / put on holiday list for future business with PLL for a period specified in Clause (D) below from the date of issue of banning / holiday order.

The PBG submitted by such agency against such order/ contract shall also be forfeited.

The amount that may have become due to the contractor on account of work already executed by him shall be payable to the contractor and this amount shall be subject to adjustment against any amounts due from the contractor under the terms of the contract.

(ii) After execution of contract and during Defect liability period (DLP)/ Warranty/ Guarantee Period:

In case irregularities are found to be true, the Agency shall be banned / put on holiday list for future business with PLL for a period specified in Clause (D) below from the date of issue of banning / holiday order.

The PBG submitted by such Agency against such order/ contract shall also be forfeited.

(iii) After expiry of Defect liability period (DLP)/ Warranty / Guarantee Period.

In case irregularities are found to be true, the Agency shall be banned / put on holiday list for future business with PLL for a period specified in Clause (D) below from the date of issue of banning / holiday order.

3. Exceptional Cases:

~~(i)~~ However, as an exception, the ongoing order(s)/ contract(s) where irregularities has been observed, the Agency may be allowed to complete the supply/ job in case of following situations:

a) No adverse performance of the job as per scope of work (performance to be reviewed on quarterly basis) and.

b) The supply/ jobs are of critical nature in terms of adverse impact on the Project Completion Schedule and or prospective revenue generation.

(ii) DELETED

(III) The Performance Bank Guarantee (PBG), of such Agency against the order (s)/ contract (s) where Agency is allowed to complete the supply/ job in above exceptional case shall not be forfeited on this ground. The contract shall be executed as per terms and conditions of the contract. However, the Agency shall be put on Banning / Holiday List from the date of banning order.

4. Effect of Banning on other ongoing Contracts/ Tenders

(i) If an Agency is put on Banning / Holiday List, such Agency should not be considered in ongoing tenders/ further tenders.

(ii) However, if such an Agency is already executing other order(s)/ contracts (s) where no irregularities are observed, the agency should be allowed to continue till its completion without any further increase in scope except those incidentals to original scope mentioned in the Contract.

D. HOLIDAY / BANNING PERIOD

(i) The Agency can be put on Holiday for a time period ranging from 6 months to 3 years. The committee examining the case shall propose the holiday period in its recommendation.

(ii) Banning period shall be reckoned from the date of banning order and shall be of 3 years.
In exceptional cases where the act of vendor/ contractor is a threat to the National Security, the banning shall be for indefinite period.

Attachment-II

PROCEDURE FOR EVALUATION OF PERFORMANCE OF VENDORS/ CONTRACTORS/ CONSULTANTS

1 GENERAL

A system for evaluation of Vendors/ Suppliers/Contractors/ Consultants and their performance is a key process and important to support an effective purchasing & contracting function of an organization.

Performance of all participating Vendors/ Suppliers/Contractors/ Consultants need to be closely monitored to ensure timely receipt of supplies from a Vendor, completion of an assignment by a Consultant or complete execution of order by a contractor within scheduled completion period. For timely execution of projects and meeting the operation & maintenance requirement of operating plants, it is necessary to monitor the execution of order or contracts right from the award stage to completion stage and take corrective measures in time.

2 OBJECTIVE

The objective of Evaluation of Performance aims to recognize and develop reliable Vendors/ Suppliers/Contractors/ Consultants so that they consistently meet or exceed expectations and requirements.

The purpose of this procedure is to put in place a system to monitor performance of Vendors/ Suppliers/Contractors/ Consultants associated with PLL in Projects and in O&M so as to ensure timely completion of various projects, timely receipt of supplies including completion of works & services for operation and maintenance of operating plants and quality standards in all respects.

3 METHODOLOGY

i) Preparation of Performance Rating Data Sheet

Performance rating data Sheet for each and every Vendor/ Supplier/Contractor/ Consultant for all orders/Contracts with a value of Rs. 7 Lakhs and above is recommended to be drawn up. These data sheets are to be separately prepared for orders/ contracts related to Projects and O&M. Format, Parameters, Process, responsibility for preparation of Performance Rating Data Sheet are separately mentioned.

ii) Measurement of Performance

Based on the parameters defined in Data Sheet, Performance of concerned Vendor/ Supplier/Contractor/ Consultant would be computed and graded accordingly. The measurement of the performance of the Party would be its ability to achieve the minimum scoring of 60% points in the given parameters.

iii) Initiation of Measures:
Depending upon the Grading of Performance, corrective measures would be initiated by taking up the matter with concerned Vendor/ Supplier/Contractor/ Consultant. Response of Vendor/ Supplier/Contractor/ Consultant would be considered before deciding further course of action.

iv) Implementation of Corrective Measures:
Based on the response of Vendor/ Supplier/Contractor/ Consultant, concerned Engineer-in-Charge for the Projects and/or OIC in case of O&M would recommend for continuation or discontinuation of such party from the business of PLL.

v) Orders/contracts placed on Proprietary/OEM basis for O&M will be evaluated and, if required, corrective action will be taken for improvement in future.

4 EXCLUSIONS:

The following would be excluded from the scope of evaluation of performance of Vendors/ Suppliers/Contractors/ Consultants:

i) Orders/Contracts below the value of Rs. 7 Lakhs (increase value).

ii) One time Vendor/ Supplier/Contractor/ Consultant.

iii) Orders for Misc./Administrative items/ Nonstock Non valuated items.

However, concerned Engineer-in-Charge /OICs will continue to monitor such cases so as to minimize the impact on Projects/O&M plants due to non-performance of Vendors/ Suppliers/Contractors/ Consultants in all such cases.

5 PROCESS OF EVALUATION OF PERFORMANCE OF VENDORS/ SUPPLIERS/ CONTRACTORS/ CONSULTANTS

5.1 FOR PROJECTS

i) Evaluation of performance of Vendors/ Suppliers/Contractors/ Consultants in case of PROJECTS shall be done immediately with commissioning of any Project.

ii) On commissioning of any Project, EIC (Engineer-in-charge)/ Project-in-charge shall prepare a Performance Rating Data Sheet (Format- 1) for all Orders and Contracts excluding cases under para 4.0.

iii) Depending upon the Performance Rating, following action need to be initiated by Engineer-in-charge/Project-in-charge:

S.No.	Performance Rating	Action
1	POOR	Seek explanation for Poor performance

2	FAIR	Seek explanation for Fair performance
3	GOOD	Letter to the concerned for improvir performance in future
4	VERY GOOD	No further action

iv) Reply from concerned Vendor/ Supplier/Contractor/ Consultant shall be examined. In case of satisfactory reply, Performance Rating data Sheet to be closed with a letter to the concerned for improving performance in future.

v) When no reply is received or reasons indicated are unsatisfactory, the following actions need to be taken:

A. Where performance rating is "POOR"

Recommend such defaulting Vendor/Supplier/Contractor/ Consultant for putting on Holiday as per "Procedure for Putting an Agency on Holiday and Banning List" As mentioned elsewhere in the Tender document

i) Poor Performance due to reasons other than Quality: **One Year**

ii) Poor Performance on account of Quality (if any mark obtained against Quality parameter is less than 30): **Two Years**

iii) Poor Performance leading to termination of contract or Offloading of contract due to poor performance solely attributable to Vendor/Supplier/Contractor/Consultant or Repeated Offence: **Three Years**

Non-performance of a Vendor/Supplier/Contractor/Consultant leading to termination of Contract/ Order such Vendor/ Supplier/ Contractor/Consultant are also to be considered for Holiday.

In all such cases, concerned site will put up recommendation and putting the party on Holiday list as per process defined in "Procedure for putting an agency in Holiday list and Banning list"

B. Where Performance rating is "FAIR"

Recommend for issuance of warning to such defaulting Vendors/Contractors/Consultants to improve their performance.

5.2 FOR CONSULTANCY JOBS

Monitoring and Evaluation of consultancy jobs will be carried out in the same way as described in para 5.1 for Projects except the functions of Project Manager will be performed by concerned In-charges of user Deptts. Such as Project Development, Business Development, HR, Finance, HSE etc.

5.3 FOR OPERATION & MAINTENANCE

i) Evaluation of performance of Vendors/ Suppliers/Contractors/ Consultants in case of Operation and Maintenance shall be done immediately after execution of order/ contract.

ii) After execution of orders a Performance Rating Data Sheet (Format attached herewith) shall be prepared for Orders by C&P and for Contracts/Services by respective Engineer-In-Charge excluding cases under para 4.0.

iii) Depending upon Performance Rating, following action need to be initiated by C&P

Sl. No.	Performance Rating	Action
1	**POOR**	Seek explanation for Poor performance
2.	**FAIR**	Seek explanation for Fair performance
3	**GOOD**	Letter to the concerned for improving performance in future.
4	**VERY GOOD**	No further action

iv) Reply from concerned Vendor/ Supplier/Contractor/ Consultant shall be examined. In case of satisfactory reply, Performance Rating data Sheet to be closed with a letter to the concerned for improving performance in future.

v) When no reply is received or reasons indicated are unsatisfactory, the following actions need to be taken:

A. Where performance rating is “POOR”

Recommend such defaulting Vendor/Supplier/Contractor/ Consultant for putting on Holiday as per “Procedure for Putting an Agency on Holiday and Banning List" As mentioned at Annexure I:

i) Poor Performance due to reasons other than Quality: **One Year**

ii) Poor Performance on account of Quality (if any mark obtained against Quality parameter is less than 30): **Two Years**

iii) Poor Performance leading to termination of contract or Offloading of contract due to poor performance solely attributable to Vendor/Supplier/Contractor/Consultant or Repeated Offence: **Three Years**

B. Where Performance rating is “FAIR”

Recommend for issuance of warning to such defaulting Vendors/Contractors/Consultants to improve their performance.

FORMATS

FORMAT-1

PETRONET LNG LIMITED

PERFORMANCE RATING DATA SHEET

i) Project/Work Centre :

ii) Order/ Contract No. & date :

iii) Brief description of Items Works/Assignment :

iv) Order/Contract value (Rs.) :

v) Name of Vendor/Supplier/ Contractor/ Consultant :

vi) Contracted delivery/ Completion Schedule :

vii) Actual delivery/ Completion date :

Performance Parameter	Delivery/ Comp Performance	Quality Perform	Reliability Performance#	Total
Maximum Mark	40	40	20	100
Marks Allocated				

Note:

Remarks (if any)

PERFORMANCE RATING (**)

Note:

(#) Vendor/Supplier/Contractor/Consultant who seek repeated financial assistance or deviation beyond contract payment term or seeking direct payment to the sub-vendor/sub-

contractor due to financial constraints, then ‘0’ marks should be allotted against Reliability Performance.

(*) Allocation of marks should be as per enclosed instructions

(**) Performance rating shall be classified as under:

Sl. No.	Range (Marks)	Rating
1	60 & below	POOR
2	61-75	FAIR
3	76-90	GOOD
4	More than 90	VERY GOOD

Signature of Authorised Signatory:

Name:

Designation:

Instructions for allocation of marks

1. Marks are to be allocated as under:

1.1 **DELIVERY/ COMPLETION PERFORMANCE** **40 Marks**

	Delivery Period/ Completion Schedule	**Delay in Weeks**	**Marks**
a)	Upto 3 months	Before CDD	40
		Delay upto 4 weeks	35
		” 8 weeks	30
		” 10 weeks	25
		” 12 weeks	20
		” 16 weeks	15
		More than 16 weeks	0
b)	Above 3 months	Before CDD	40
		Delay upto 4 weeks	35
		” 8 weeks	30
		” 10 weeks	25
		” 16 weeks	20
		” 20 weeks	15
		” 24 weeks	10
		More than 24 weeks	0

1.2 QUALITY PERFORMANCE — 40 Marks

For Normal Cases: No Defects/ No Deviation/ No failure		40 marks
i. Rejection/Defects	Marks to be allocated prorata basis for acce Quantity as compared to Quantity for normal cases	10 marks
ii. When quality Failure en System integration and sa the system	Failure of severe nature - Moderate nature - low severe nature	0 marks 5 marks 10-25 marks
iii. Number of Deviations	1. No deviation: 2. No. of deviations < 2: 3. No. of deviations > 2:	5 marks 2 marks 0 marks

1.3 RELIABILITY PERFORMANCE — 20 Marks

A	FOR WORKS/CONTRACTS	
i)	Submission of order acceptance, agreement, PBG, Drawings and other documents within time	4 marks
ii)	Mobilization of resources as per Contract and in time	4 marks
iii)	Liquidation of Check-list points	4 marks
iv)	Compliance to statutory and HS&E requirements or Reliability of Estimates/Design/Drawing etc. in case of Consultancy jobs	4 marks

v)	Timely submission of estimates and other documents for Extra, Substituted & AHR items	4 marks
B.	**FOR SUPPLIES**	
i)	Submission of order acceptance, PBG, Drawings and other documents within time	5 marks
ii)	Attending complaints and requests for after sales service/ warranty repairs and/ or query/ advice (upto the evaluation period).	5 marks
iii)	Response to various correspondence and conformance to standards like ISO	5 marks
iv)	Submission of all required documents including Test Certificates at the time of supply	5 marks

Page 209 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

स्वदेशी सामग्रियों के लिए पैकिंग, मार्किंग, शिपिंग और दस्तावेज विनिर्देश

PACKING, MARKING, SHIPPING AND DOCUMENTATION SPECIFICATIONS FOR INDIGENOUS MATERIALS

Rev. No	Date	Purpose	Prepared by	Reviewed by	Approved by
1	10-09-2018	ISSUED FOR COMPLIANCE	DDC	DRC	ED (SCM)
0	05-12-2012	ISSUED FOR COMPLIANCE	DDC	DRC	GM (I)

Copyrights EIL – All rights reserved

Page 210 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

Abbreviations:

CM	-	Centimeters
EIL	-	Engineers India Limited
E-way bill	-	Electronic Way Bill
Kg	-	Kilograms
FTL	-	Full Truck / Trailer Load
KGS	-	Kilograms
L.R.	-	Lorry Receipt / Goods Receipt
mm	-	Millimetre
MT	-	Metric Ton
NO. / NOS.	-	Number / Numbers
P.O.	-	Purchase Order
RCM	-	Resident Construction Manager

Document drafting Committee Members:

Shri. V.S.Krishnaswamy, Manager (SCM-Shipping)

Shri Ashish Mathur, Manager (SCM-Shipping)

Document review Committee Members:

Shri Uttam Kumar, Manager (SCM-C&P)

Shri R K Singh, Sr. G.M (SCM) & Head (Shipping)

Shri Rajeev Kumar, Sr. G.M (SCM-Inspection)

Copyrights EIL – All rights reserved

Page 211 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

1. GENERAL

1.1 Purpose

This specification details the minimum requirements for the preservation, packing, marking, shipping and documentation of Products, materials and equipment as specified in the respective Purchase Orders or Contracts. This specification forms an integral part of the Purchase Order or Contract issued. However, whenever specific instructions are detailed in the Purchase Order and are in conflict with this specification, particular instructions mentioned in the individual Purchase Order or Contract shall prevail over this general specification.

1.2 Requirements and Conditions

The following requirements are intended as minimum requirements, and compliance to these requirements in no way absolves or relieves Supplier of any responsibility or obligation outlined in the Purchase Order. Equivalent or better packing methods may be deployed wherever supplier's own packing standards are more stringent to the requirements mentioned herein. Supplier shall submit the packing procedure or its equivalent for purchaser's approval during detailed engineering.

In all circumstances, the packing will be designed and constructed in order to support materials during transportation as well as to prevent the materials from damage due to impact, extreme climatic conditions, sun and rain. It must be ensured that the materials and equipments are delivered to the job site by sea, road or air, in good condition.

The Supplier shall, at its own cost, ensure items to be transported are carefully packed and protected in accordance with best practice, having due regard to the climatic conditions encountered during the passage, method of carriage and handling / loading / unloading processes. In addition to any of the measures detailed within this Specification, the Supplier shall apply any other measures that, in its experience, are required to safeguard the particular item. The Supplier shall obtain the approval of EIL / Owner for any variation to the packing, marking and shipping requirements outlined in this Specification.

1.3 Responsibility and liability

Supplier shall be held responsible for any damages and / or losses of all and any kind that may occur by not respecting these specifications. Owner / EIL reserves the right to reject any packing when the packing does not conform to these specifications / instructions and / or when the packing does not ensure perfect protection of the goods and materials. Supplier is responsible for the weights and dimensions declared and the marking of the packages. Supplier will be held responsible in the event goods and materials becoming useless, broken or damaged as a result of poor packing and / or stowing or due to corrosion because of insufficient or inadequate protection. All direct and indirect costs resulting thereof will be back charged to Supplier.

2. CLEANING AND PRESERVATION

2.1 Cleaning

All equipment, materials and parts shall be thoroughly cleaned inside and outside and shall be free from grease, oil, weld spatter, rust and all other foreign matter prior to preservation.

Copyrights EIL – All rights reserved

Page 212 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

2.2 Preservation

Articles may be exposed to severe environmental or climatic conditions, moisture and dust. All materials and equipment shall be packaged suitable to prevent damage and deterioration during transportation and storage. Where damage occurs due to inadequate packaging of items, the liability for costs associated with rectification of the damage will be to the Supplier's account. All metals subject to corrosion shall be treated with a corrosion preservative suitable for the purpose intended. Products susceptible to corrosion must be packaged in a dry non-corrosive environment for the duration of shipment and storage, for a minimum of 1 year. All bright and machined parts shall be coated with a recognized rust preventative suited to the particular application concerned. All internal parts of machinery shall be treated with lubricant containing rust and oxidation inhibitors to protect equipment from any possible damage. Such lubricants shall be compatible with those which will subsequently be used in service and shall be identified by appropriate tagging. Electrical equipment and instrumentation shall be packed with a suitable desiccant. Delicate equipment such as instruments, electrical switchboards and panels etc. shall be packed for protection to eliminate the effects of vibration.

Wherever necessary, desiccant packs shall be kept to avoid excessive moisture in the packing.

3. PACKING

3.1 General

The instructions herein shall be considered as general directives and minimal requirements, which are applicable to the packing of all equipment and materials. The Supplier is responsible for the correct and adequate packing of the equipment and materials so that these equipment and materials will arrive at destination undamaged and the packing itself in such a condition that, if not otherwise required, it will be suitable for a minimum of 1 year storage.

3.2 Packaging Materials

All packaging together with packaging and protective materials shall be new, maintain its integrity and perform its intended function while being transported, handled and stored.

The quality of packing shall provide maximum protection against damage, breakage and pilferage during transport, storage and multiple handling, including handling by hoisting, lifting devices and / or forklift trucks. Material used for packaging, packing, wrapping, sealers, moisture resistant barriers and corrosion preservatives shall be of recognized brands and grades and shall conform to the best world standards.

Packaged Products showing any damage, defect or shortage resulting from improper packaging, packaging materials or packing procedure or having concealed damage or being short at the time of unpacking shall be subject to rejection and be replaced at the Supplier's cost

3.3 Packing requirements

3.3.1 Wooden Boxes and Crates

Interior support board shall be of strength to withstand multiple handling. Tops of crates shall be one piece wherever possible to avoid seepage through cracks; otherwise a top coating is required. Waterproof lining shall be used for sides, ends and top of crates, proper venting of cargo boxes containing machinery is required, as well as sufficient use

Copyrights EIL – All rights reserved

Page 213 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

of desiccants. Crates shall be diagonally braced on all faces and suitable for hooks, slings and forklifts. Heavy items shall be secured with wood braces. Fragile items shall be cushioned. Material packed in large boxes shall be layered between plywood sheets to maintain load integrity during transit. Banding shall be used on all boxes to prevent distortion / deformation of the box.

3.3.2 Pallets

When equipment and/or materials are packed on pallets (wood or synthetic), these should be solid double deck pallets that provide adequate load support during transportation and storage (under not always ideal conditions). The pallets should have a dynamic load capacity, enough to carry the mass loaded on the pallet. Where feasible, the top surface of the pallet must be flat. The pallet design must enable safe handling by forklift, cranes etc. and storage on rough surface. Pallets shall be covered with wrapping. All corners, horizontal and vertical shall be protected with cardboard protection strips. The pallet must be tide on all sides with steel or synthetic straps.

3.4 Packaging

All equipment and materials shall be properly fixed (by bolts, clamps, supporting beams, etc.) in such a way that internal movements and / or loosening is impossible. Under the top cover (roof) depending on the case and crate length, a. sufficient number of strong beams shall be placed and properly fixed in order to allow stacking of the cases and crates avoiding any compression. Equipment parts and materials which may be subject to damage by vibration and /or shock must be protected using shock-absorbing material. All equipment and materials which may be damaged by moisture shall be packed in airtight bags in which sufficient desiccant material (e.g. silica gel) is placed. All openings on the equipment must be closed with wooden / metal or plastic covers to prevent damage to the openings and interiors. Fragile and loose parts easily damageable pertaining to the equipment must be securely and properly packed in a separate case.

3.5 Waterproofing

Cases including the cover shall be internally lined with a strong type of waterproof paper or plastic foil. Equipment and materials shall always be packed in a foil (polyethylene or aluminum) for extra (double) protection against rainfall. Those foils shall be applied in such a way that they are self draining.

3.6 Hazardous cargo

The hazardous materials shall be packed in accordance with and in cognizance to the applicable rules, regulations and tariff of all Governmental Authorities and other Governing bodies. Hazardous materials shall always be packed and documented separately from any other material. It shall be the responsibility of the seller of hazardous materials to designate the materials as hazardous and to identify each material by its proper commodity name and its hazardous materials class code. Safety and emergency procedures shall be displayed outside the package. Any certificates required for transportation or for authorities to be supplied before shipment of the goods

4. GUIDELINES FOR PACKING GOODS

In subsequent paragraphs details of different types of packing for different types of goods are defined. Supplier shall make packing details / procedure based on the guidelines and submit for approval.

Chemicals in powder form, catalysts, refractories & like materials etc. shall be packed in drums only.

Copyrights EIL – All rights reserved

Page 214 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

4.1 Pipe

All pipes 2" included and below shall be packed in crates. All pipes to be capped and ends sealed with waterproof tape. Pipes over 2" up to 6", shall be bundled and banded in bundles of uniform length. Bundling is carried out with U-IRON or traversal planks, joined with threaded connecting rods with locknuts.. Bundle weight shall not exceed 2,000 kg. All pipes are to be capped and ends sealed with waterproof tape (tape is not necessary if end caps are of the pre-shrunk or self-sealing type).Pipes larger than 6" shall be shipped as single lengths with the ends capped. End caps are to be of the recessed type to enable the use of soft faced hooks, but still completely sealing the end and also protecting the weld. All stainless steel / non-ferrous piping must be packed separately in wooden crates. Any banding of bundles is to be with the same material. The bundling and packing of pipe and instrument tubing shall enable the safe discharge of pipe on site using clamps and forklifts. All pipes shall be supported along their lengths to prevent bending / flexing during transport. During loading / unloading slings shall be applied to the center of the load as well as each end to prevent bowing.

Pipe and rigid conduit smaller than DN50 diameter shall be bundled in units not to exceed 1000 kg. Threaded and coupled pipe shall be equipped with plastic thread protectors. All material shall be segregated and shipped by generic material type to prevent cross contamination. Where wire rope or chains are used, adequate padding shall be used at points of contact with pipe. Care must be taken to prevent any chafing of pipes against each other or against the metal structures of the vehicle during transportation. Where necessary, such metal structures must be padded with planks or plastic tubes. Skids and dunnage must be used between the bundles in transit as well as in the storage of coated pipes.

4.2 Pipe Fittings, Flanges, Valves and Gaskets

All pipe fittings, flanges and valves up to 6", are to be packed in cases / crates. For items over 6", these may be fixed securely to a pallet base and enclosed in a crate, for protection. All flange faces / bevel ends shall be suitable protected with plastic caps / end protectors. Where valves have actuators attached, rigidity must be ensured for the valve and actuator. The vulnerable parts of the actuator are to be completely protected within a wooden crate. Empty spaces shall be filled with expanded PU foam to restrict movement in the crate. All stainless steel fittings, flanges and valves of all sizes, must be packed separately in wooden crates. Any strapping is to be with the same material. Gaskets are considered fragile and shall be treated as such. Individual gasket sizes shall be boxed and labeled separately.

All threaded fittings and pipes should be greased and provided with plastic caps.

4.3 Steel Structure and Plates

Structural steel sections and plates shall be strapped in bundles of convenient size and weight for handling. Rolled and shaped plates shall be provided with suitable bracing to eliminate distortion during transit, and shall be bundled in uniform lengths. Each bundle shall be marked with a metal tag, hard stamped, secured under steel wrapping. A 2000 kg limitation shall be imposed for lifts in this category unless exempted.

4.4 Itemized Equipment

Units or parts belonging to main equipment but separately packed shall be clearly marked for easy identification with the main equipment to which they relate.

Copyrights EIL – All rights reserved

Page 215 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

All flanges, machined working surfaces and threaded parts of all equipment shall be suitably protected. All flanged connections of vessels shall be protected by metal plates correctly casketed by wooden plugs or plastic caps suitably secured in position.

Vessels shall, where possible, be packed on skid constructions and secured with adjustable steel straps. Manholes and other major openings shall be protected with cover flanges or metallic plates firmly secured. Smaller openings shall be closed with plastic plugs / caps.

All vessel internals and items not installed by Supplier at works including accessories such as small parts, bolts, nuts, gaskets, etc. shall be packed in wooden cases separately for each vessel or apparatus and marked with the same item number as the vessel / apparatus in order to protect all parts from loss or damage in transit. Internals, bolts and gaskets for service / testing operations shall be supplied with the vessels / items by Supplier and all internals shall be boxed separately and marked according to marking procedure; each item shall be supplied correctly and identified for field installation by others.

All vessels / heat exchangers or items of such construction shall be dried, thoroughly cleaned inside and be free of all dirt and loose foreign materials. The equipment shall be filled with Nitrogen. Make up arrangement for loss of Nitrogen along with a pressure gauge shall be installed.

All commissioning spare parts shall be packed separately and marked with the relevant main item number.

Pumps, compressors, rotating equipment, turbines and motors will require specific packing and preservation as per the relevant Technical Specification. For skidded equipment openings, flange faces, threaded connections, wires, valve stems, and other component parts that may be subjected to mechanical damage or corrosion shall be adequately protected. This protection shall be applied to all components, both those removed and boxed and those remaining in place on the skid assembly. Each skid shall have one box strapped to it containing a complete set of drawings together with a manual covering installation and operating instructions and other pertinent instructions required for reassembly of components that were disassembled for shipment.

4.5 Control Panels and Electrical Devices

Equipment such as control panels, instruments and electrical devices shall be packed in an interior moisture / vapor-proof barrier with silica gel or comparable desiccant. Desiccants shall be bagged to avoid dispersing in containers. The quantity of desiccant shall be calculated in accordance with the manufacturer's recommendations. Equipment must be secured to the case with bolts, blocks or straps. Adequate precautions (for example, shaft locks to prevent longitudinal / rotational movement of rotor shafts in motors) shall be included in the packaging of all equipment which has plain, ball or roller bearings so as to minimize the risk of bearing damage.

4.6 Instruments

Instruments shall be thoroughly clean, dry and free from rust and individually wrapped using polythene sheets / U foam / Thermocol sheets depending upon the items and then packed in wooden boxes. The left out spaces and top of the boxes should be filled with rubberized coir to get proper cushioning effect. Special attention shall be paid for arresting movements of their operating mechanism during transportation. Silica gel or

Copyrights EIL – All rights reserved

other approved desiccant shall be strapped inside but shall not come into contact with the paintwork.

4.7 Cables

All electric cables to be packed in new cable drums made of steel and painted with epoxy resin paint. Cable ends to be carefully protected before packing. Polythene sheet should be wrapped over the cables and sealed properly. Cable drum can be put in wooden crates for ease in handling and transportation.

4.8 Saddles, Supports, Spiders and Lifting Equipment

All items which cannot be transported without independent supports must be supplied with Shipping saddles suitable for land and / or ocean transit. Such transport saddles are to be included within the scope of supply. Supplier is to advise of any requirement for lifting beams or other specialized lifting equipment and will include provision for use of such equipment for loading purposes. The Supplier is responsible for ensuring that all modules and oversize items are adequately braced and where required, plastic wrapped suitable for transport. Modules and oversize items shall be packaged to prevent damage during transport.

4.9 Assortment Of Package / Spare Parts for Erection and Commissioning

Equipment and / or parts of different item numbers shall not be packed together in the same package. Small goods such as accessories, spare parts for erection and commissioning and special tools shall be packed separately in respective inner boxes with tags or labels attached there being clearly indicating their contents. In case such accessories, spare parts and special tools are packed in separate boxes / crates, item no. of main equipment shall be clearly mentioned in Main Shipping Mark for easy identification.

5. MARKING

5.1 General

The purpose of the marking is to identify the packages and detail the weight and dimensions to assure efficient and correct handling during transport and upon arrival at destination.

5.2 Marking Instructions & dispatch details

Packages and crates will be marked with indelible black paint. Marking must be perfectly legible. All packages shall be clearly and properly marked in English language if not otherwise specified.

The shipping marks, which will be shall be stenciled on two sides and one end in clear characters at least 5 centimeters high (where crate size permits, otherwise use optimum size for each package dimension).

The texts shall be printed by means of stamps, stencil-plates or electronically. The use of stickers is not allowed, unless securely covered by plastic. Bundles shall be marked by embossing on two metal tags bearing the shipping marks and placed on each side of the package and securely attaching them to the goods. Paint shall be used on metal surfaces.

Labels or tags to be clearly visible and shall be of a quality to remain visible and attached during transit, handling and storage for a minimum period of 12 Months.

Copyrights EIL – All rights reserved

Page 216 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

Page 217 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

Crates containing fragile articles must be packed with special precaution against risk of breakage and must be stenciled on all sides "FRAGILE - HANDLE WITH CARE". Where crates are not to be overturned, Supplier must show on the crates, clear and readily visible identification, to ensure they are kept in the correct position.

Packages / equipment of 2,000 kg or more must be marked with slinging points on all sides, in addition to the centre of gravity marks.

Number packages consecutively i.e. 1 of 10, 2 of 10, etc. Do not duplicate package numbers. SUPPLIER is responsible for any loss or damage caused by incorrect marking.

All cases/crates shall also be marked with the appropriate international standard graphic symbols for handling.

As a minimum, all cases/crates are to be marked clearly on all four sides with:

"HANDLE WITH CARE" "RIGHT SIDE UP" "KEEP DRY"

In the case of packages with a single gross weight totaling 2,000 kg and / or a height of more than 1m, the centre of gravity shall be clearly marked with the symbol on two adjoining sides. For all items of equipment with an eccentric centre of gravity this symbol shall be marked at the bottom, side and top of the package.

The slinging and lashing points shall be marked with a chain symbol.

When packing in cases / crates, these packages shall also have metal corners at the slinging points.

External front and rear sides of the boxes shall be planed for writing instructions. To facilitate identification, the required colour coding as per the specifications shall be carried out on each package and on corners of pipes & plates.

In case of bundles or other packages wherever marking cannot be stenciled, the same shall be embossed on metal or similar tag and wired securely at minimum two convenient points and both ends shall be protected / covered with gunny bags upto 18" (Eighteen Inches). In case of loose pipes, sticker of above markings should be pasted on inner wall corner of each pipe on both sides

Dispatch details such as consignor / consignee address, contract and case details, stacking instructions shall be written on one side of the boxes. One copy of packing slip wrapped in polyethylene bag covered with aluminum packing slip holder to be nailed on the external surface of the box. A packing list and preservation instructions shall be enclosed in a clear weatherproof plastic re-sealable envelope stapled to the box such that the receiver may determine contents without opening the container. An additional packing list is to be enclosed in a clear waterproof plastic re-sealable envelope stapled inside the container. Stapling of the envelopes shall not prevent removal of the documents.

Copyrights EIL – All rights reserved

Page 218 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

5.3 Shipping Marks

Each package shall be marked on three sides with proper paints / indelible waterproof ink as follows:

(OWNER)

(DESTINATION)

PURCHASE ORDER NO. ----------

NET WEIGHT ---------- KGS. GROSS WEIGHT ---------- KGS.

DIMENSIONS ---------- X ---------- X ---------- CMS

PACKAGE NOS. (SL. NO. OF PACKAGE) OF (TOTAL NO. OF PACKAGES)

TAG / ITEM NO. ----------

SUPLLIER'S NAME----------

The details of the Owner / Project are defined specifically in the Purchase Order / Contract.

5.4 Storage Code

The type of storage required is required to be specified, it will be shown on each packaging in RED colour

X	Crates or packages to be stored outdoor without covers
XX	Crates or packages to be stored under tarpaulin
XXX	Crates or packages to be stored in covered or enclosed premises
XXXX	Crates or packages which must be stored in air-conditioned premises

6. SHIPMENT

Dispatch of material shall be made in accordance with the relevant terms of Purchase Order. Name of the owner, Project, location and other relevant information shall be as per the relevant annexure(s) to the Purchase Order / Contract.

Any change in mode of transport shall be resorted to only after prior approval in writing. Supplier shall ensure dispatch of equipment / materials immediately after they are

Copyrights EIL – All rights reserved

Page 219 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

inspected and released. All consignments should be booked in the name of 'owner' and not under 'self' basis.

6.1 Dispatch By Road:

a) The Materials shall be dispatched on Door-Delivery basis (smalls or FTL) through a registered transporter.

However, in case, the transporter is nominated by EIL / Owner, the goods shall be dispatched through the same only.

b) The supplier shall ensure with Transport Company the delivery of materials within a reasonable transit period. A complete set of dispatch documents (Delivery Challan / Invoice / Packing List / Test Certificate / L.R. / E-way Bill number etc.) shall be sent to Head (Shipping) at EIL New Delhi and the Resident Construction Manager (RCM) at site.

6.2 Shipment By Air:

Whenever supplier is instructed by EIL/ Owner to airfreight any material, the supplier shall take prompt action for the same. Immediately after air-shipment is effected, the vendor shall intimate by e-mail, the details of Airway Bill number and date, the flight No., Number of packages etc. to Head-Shipping, EIL New Delhi and Resident Construction Manager at EIL (Site).

6.3 Destination:

The consignments should be dispatched to the Consignee / Address as detailed in the Purchase Order.

6.4 Advance Information:

Immediately after a shipment is made supplier shall intimate Underwriter, Head (Shipping) and RCM vide mail regarding particulars of materials, value, Purchase Order No., date of dispatch, L.R. number, E-way Bill No., truck no., name of Transport Company.

6.5 Transmission of Dispatch Documents :

Supplier shall, within 48 hrs. of the dispatch of the materials depending upon the payment terms of the Purchase Order, either negotiate through Owner's / EIL's Bankers or forward directly, by Courier the complete set of dispatch Documents (as detailed in Purchase Order) to Owner / EIL. The supplier shall be responsible for any delay in clearance of the consignment at destination and consequent wharfage / demurrage, if any, due to delay in transmittal of the required documents.

7. TRANSIT RISK INSURANCE

All equipments / materials will be insured for transit risk by (Owners) unless otherwise specified. The insurance cover will be provided from warehouse-to-warehouse.

Copyrights EIL – All rights reserved

Page 220 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

विदेशी सामग्रियों के लिए पैकिंग, मार्किंग, शिपिंग और दस्तावेज विनिर्देश

PACKING, MARKING, SHIPPING AND DOCUMENTATION SPECIFICATIONS FOR IMPORTED MATERIALS

Rev. No	Date	Purpose	Prepared by	Reviewed by	Approved by
1	10-09-2018	ISSUED FOR COMPLIANCE	DDC	DRC	ED (SCM)
0	05-12-2012	ISSUED FOR COMPLIANCE	DDC	DRC	GM (I)

Copyrights EIL – All rights reserved

Page 221 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

Abbreviations:

CM	-	Centimeters
DDP	-	Delivered Duty Paid
DGR	-	Dangerous Goods Regulation
EIL	-	Engineers India Limited
ETA	-	Estimated time of arrival at Destination Port
ETD	-	Estimated time of Departure at the Port of Loading
EXIM	-	Export Import Policy of India
FCA	-	Free Carrier
IATA	-	International Air Transport Association
IMDG	-	International Maritime Dangerous Goods
ISPM 15	-	International Standards of Phytosanitory Measures 15
Kg	-	Kilograms
mm	-	Millimetre
MSDS	-	Material Safety Data Sheet
MT	-	Metric Ton
NO. / NOS.	-	Number / Numbers
P.O.	-	Purchase Order
UN NO.	-	Unique Identification Number given for Hazardous Goods

Document drafting Committee Members:

Shri. V.S.Krishnaswamy, Manager (SCM-Shipping)

Shri Ashish Mathur, Manager (SCM-Shipping)

Document review Committee Members:

Shri Uttam Kumar, Manager (SCM-C&P)

Shri R K Singh, Sr. G.M (SCM) & Head (Shipping)

Shri Rajeev Kumar, Sr. G.M (SCM-Inspection)

Copyrights EIL – All rights reserved

Page 222 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

1. GENERAL

1.1 Purpose

This specification details the minimum requirements for the preservation, packing, marking, shipping and documentation of Products, materials and equipment as specified in the respective Purchase Orders or Contracts. This specification forms an integral part of the Purchase Order or Contract issued. However, whenever specific instructions are detailed in the Purchase Order and are in conflict with this specification, particular instructions mentioned in the individual Purchase Order or Contract shall prevail over this general specification.

1.2 Scope

Supplier shall be responsible for sea worthy export packing capable of performing all necessary functions like prevention of damage to the contents, sufficient to support frequent handling and lengthy period of outdoor storage in adverse weather conditions. Workmanship and materials used shall be of high standard meeting the technical requirements and in accordance with best commercial export packing practices. Supplier shall be responsible for sea worthy export packing, however, it shall meet the minimum requirements specified herein. Equivalent or better packing methods may be deployed wherever supplier's own packing standards are more stringent to the requirements mentioned herein. Supplier shall submit the packing procedure or its equivalent for purchaser's approval during detailed engineering.

The scope of this specification is to define Supplier's responsibilities in terms of:

- Preservation of the materials and equipments before packing.
- Packing of the materials and equipments for road, rail, sea and/or air transportation to ultimate destination i.e. project site.
- Making cases/crates
- Chemical Treatment/Fumigation before packing to prevent fungus and damage
- Marking of cases/crates.
- Documentation for shipments

1.3 Responsibility and liability

Supplier shall be held responsible for any damages and/or losses of all and any kind that may occur by not respecting these specifications. Owner/EIL reserves the right to reject any packing when the packing does not conform to these specifications/instructions and/or when the packing does not ensure perfect protection of the goods and materials. Supplier is responsible for the weights and dimensions declared, and the marking of the packages. Supplier will be held responsible in the event goods and materials becoming useless, broken or damaged as a result of poor packing and/or stowing or due to corrosion, because of insufficient or inadequate protection. All direct and indirect costs resulting thereof will be back charged to Supplier.

1.4 Requirements and Conditions

The following requirements are intended as minimum requirements, and compliance to these requirements in no way absolves or relieves Supplier of any responsibility or obligation outlined in the Purchase Order. In all circumstances, the packing will be designed and constructed in order to support materials during transportation as well as to prevent the

Copyrights EIL – All rights reserved

materials from damage due to impact, extreme climatic conditions, sun and rain. It must be ensured that the materials and equipments are delivered to the job site by sea, road or air, in good condition.

The method of packing and packaging materials must be sufficient to protect the goods from the hazards associated with handling and storage conditions encountered in transit and at site. The method of marking packages must be sufficient to distinguish each package from others. The documentation prepared for shipments must be sufficient for use in international transportation and customs clearance procedures.

The Supplier shall, at its own cost, ensure items to be transported are carefully packed and protected in accordance with best practice, having due regard to the climatic conditions encountered during the passage, method of carriage and handling / loading / unloading processes. In addition to any of the measures detailed within this Specification, the Supplier shall apply any other measures that, in its experience, are required to safeguard the particular item. The Supplier shall obtain the approval of EIL/Owner for any variation to the packing, marking and shipping requirements outlined in this Specification.

2. CLEANING AND PRESERVATION

2.1 Cleaning

All equipment, materials and parts shall be thoroughly cleaned inside and outside and shall be free from grease, oil, weld spatter, rust and all other foreign matter prior to preservation.

2.2 Preservation

Articles may be exposed to severe environmental or climatic conditions, moisture and dust. All materials and equipment shall be packaged suitable to prevent damage and deterioration during transportation and storage. Where damage occurs due to inadequate packaging of items, the liability for costs associated with rectification of the damage will be to the Supplier's account. All metals subject to corrosion shall be treated with a corrosion preservative suitable for the purpose intended. Products susceptible to corrosion must be packaged in a dry non-corrosive environment for the duration of shipment and storage, for a minimum of 1 year. All bright and machined parts shall be coated with a recognized rust preventative suited to the particular application concerned. All internal parts of machinery shall be treated with lubricant containing rust and oxidation inhibitors to protect equipment from any possible damage. Such lubricants shall be compatible with those which will subsequently be used in service and shall be identified by appropriate tagging. Electrical equipment and instrumentation shall be packed with a suitable desiccant. Delicate equipment such as instruments, electrical switchboards and panels etc. shall be packed for protection to eliminate the effects of vibration.

Wherever necessary, desiccant packs shall be kept to avoid excessive moisture in the packing.

3. PACKING

3.1 General

The instructions herein shall be considered as general directives and minimal requirements, which are applicable to the packing of all equipment and materials. The Supplier is responsible for the correct and adequate packing of the equipment and materials so that these equipment and materials will arrive at destination undamaged and the packing itself in such a condition that, if not otherwise required, it will be suitable for a minimum of 1 year storage.

Copyrights EIL – All rights reserved

Page 223 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

Page 224 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

3.2 Packaging Materials

All packaging together with packaging and protective materials shall be new, maintain its integrity and perform its intended function while being transported, handled and stored.

The quality of packing shall provide maximum protection against damage, breakage and pilferage during transport, storage and multiple handling, including handling by hoisting, lifting devices and / or forklift trucks. Material used for packaging, packing, wrapping, sealers, moisture resistant barriers and corrosion preservatives shall be of recognized brands and grades and shall conform to the best world standards.

Timber material shall be treated / fumigated to prevent infestation by insects or similar for all material in accordance with ISPM 15. ISPM 15 describes phytosanitary measures to reduce the risk of introduction and/or spread of quarantine pests associated with solid timber packaging material (includes dunnage). Any packing made of wood, must be made from new, treated wood (according to ISPM 15 IPPC, latest version).Used cases, crates and cardboard packing are not allowed. Packaged Products showing any damage, defect or shortage resulting from improper packaging, packaging materials or packing procedure or having concealed damage or being short at the time of unpacking shall be subject to rejection and be replaced at the Supplier's cost

3.3 Packing requirements

3.3.1 Wood treatment

All solid wood, used for packing (including wooden pallets) and/or stowage should be treated (heat treatment or fumigation) according to the international standard ISPM 15 (IPPC), latest version. Use of untreated wood is not acceptable. Phytosanitary Certificate, Fumigation or treatment certificates have to be issued by the official government authorities and must accompany the original set of shipping documents.

3.3.2 Wooden Boxes and Crates

Interior support board shall be of strength to withstand stevedore handling. Tops of crates shall be one piece wherever possible to avoid seepage through cracks; otherwise a top coating is required. Waterproof lining shall be used for sides, ends and top of crates, proper venting of cargo boxes containing machinery is required, as well as sufficient use of desiccants. Crates shall be diagonally braced on all faces and suitable for hooks, slings and forklifts. Heavy items shall be secured with wood braces. Fragile items shall be cushioned. Material packed in large boxes shall be layered between plywood sheets to maintain load integrity during transit. Banding shall be used on all boxes to prevent distortion / deformation of the box.

3.3.3 Pallets

When equipment and/or materials are packed on pallets (wood or synthetic), these should be solid double deck pallets that provide adequate load support during transportation and storage (under not always ideal conditions). The pallets should have a dynamic load capacity, enough to carry the mass loaded on the pallet. Where feasible, the top surface of the pallet must be flat. The pallet design must enable safe handling by forklift, cranes etc. and storage on rough surface. Pallets shall be covered with wrapping. All corners, horizontal and vertical shall be protected with cardboard protection strips. The pallet must be tide on all sides with steel or synthetic straps.

Copyrights EIL – All rights reserved

Page 225 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

3.4 Packaging

All equipment and materials shall be properly fixed (by bolts, clamps, supporting beams, etc.) in such a way that internal movements and / or loosening is impossible. Under the top cover –(roof) depending on the case and crate length, a. sufficient number of strong beams shall be placed and properly fixed in order to allow stacking of the cases and crates avoiding any compression. Equipment parts and materials which may be subject to damage by vibration and/or shock must be protected using shock-absorbing material. All equipment and materials which may be damaged by moisture shall be packed in airtight bags in which sufficient desiccant material (e.g. silica gel) is placed. All openings on the equipment must be closed with wooden / metal or plastic covers to prevent damage to the openings and interiors. Fragile and loose parts easily damageable pertaining to the equipment must be securely and properly packed in a separate case.

3.5 Waterproofing

Cases including the cover shall be internally lined with a strong type of waterproof paper or plastic foil. Equipment and materials shall always be packed in a foil (polyethylene or aluminum) for extra (double) protection against rainfall. Those foils shall be applied in such a way that they are self draining.

3.6 HAZARDOUS CARGO

All hazardous material must be packed in adherence to the detailed requirement relating to packing, marking and labeling set out in the most recent report of the Board's Standard Advisory Committee on the Carriage of Dangerous Goods in Ships for sea freight, and the Restricted Articles Regulations, laid down by the International Air Transport Association for airfreight.

Hazardous materials shall be suitably packaged, packed separately from other materials and shall not be encased inside other packaging containers. All packages shall be marked and labeled with markings and labels as stipulated by Road Transport, and the Dangerous Goods Regulations (DGR), laid down by the International Air Transport Association (IATA) for airfreight and Sea freight IMDG Codes and Regulations in accordance with government and agency requirements. Regulations and Codes as defined by the International Maritime Organization (IMO) together with Government and Regulatory Agencies within the country of origin, country of destination or country that the products shall transit through shall be adhered to at all times. All crates / boxes / drums / packages containing Hazardous material shall be marked clearly on the outside with the relevant international details (UN No, IMCO / IMDG class, Packing group etc.) and the relevant Material Safety Data Sheets (MSDS) must accompany the goods. The Supplier shall produce any necessary hazardous cargo certificates, as required by the appropriate Government and International Transportation regulations, for all such shipments.

Seller to inform Buyer on the following in details after shipment of Cargo:

- Hazard Identification
- Fire Fighting Measures
- Accidental Release Measures
- Handling & Storage

4. GUIDELINES FOR PACKING GOODS

Copyrights EIL – All rights reserved

Page 226 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

In the subsequent paragraphs details of different types of packing for different types of goods are defined. Supplier shall make packing details/procedure based on the guidelines and submit for approval.

Chemicals in powder form, catalysts, refractories & like materials etc. shall be packed in drums only.

4.1 Pipe

All pipes 2" included and below shall be packed in crates. All pipes to be capped and ends sealed with waterproof tape. Pipes over 2" up to 6", shall be bundled and banded in bundles of uniform length. Bundling is carried out with U-IRON or traversal planks, joined with threaded connecting rods with locknuts.. Bundle weight shall not exceed 2,000 kg. All pipes are to be capped and ends sealed with waterproof tape (tape is not necessary if end caps are of the pre-shrunk or self-sealing type).Pipes larger than 6" shall be shipped as single lengths with the ends capped. End caps are to be of the recessed type to enable the use of soft faced hooks, but still completely sealing the end and also protecting the weld. All stainless steel / non-ferrous piping must be packed separately in wooden crates. Any banding of bundles is to be with the same material. The bundling and packing of pipe and instrument tubing shall enable the safe discharge of pipe on site using clamps and forklifts. All pipes shall be supported along their lengths to prevent bending/flexing during transport. During loading/unloading slings shall be applied to the center of the load as well as each end to prevent bowing.
Pipe and rigid conduit smaller than DN50 diameter shall be bundled in units not to exceed 1000kg.Threaded and coupled pipe shall be equipped with plastic thread protectors. All material shall be segregated and shipped by generic material type to prevent cross contamination. Where wire rope or chains are used, adequate padding shall be used at points of contact with pipe. Care must be taken to prevent any chafing of pipes against each other or against the metal structures of the vehicle during transportation. Where necessary, such metal structures must be padded with planks or plastic tubes. Skids and dunnage must be used between the bundles in transit as well as in the storage of coated pipes.

4.2 Pipe Fittings, Flanges, Valves and Gaskets

All pipe fittings, flanges and valves up to 6", are to be packed in cases/crates. For items over 6", these may be fixed securely to a pallet base and enclosed in a crate, for protection. All flange faces / bevel ends shall be suitable protected with plastic caps / end protectors. Where valves have actuators attached, rigidity must be ensured for the valve and actuator. The vulnerable parts of the actuator are to be completely protected within a wooden crate. Empty spaces shall be filled with expanded PU foam to restrict movement in the crate. All stainless steel fittings, flanges and valves of all sizes, must be packed separately in wooden crates. Any strapping is to be with the same material. Gaskets are considered fragile and shall be treated as such. Individual gasket sizes shall be boxed and labeled separately.

All threaded fittings and pipes should be greased and provided with plastic caps.

4.3 Steel Structure and Plates

Structural steel sections and plates shall be strapped in bundles of convenient size and weight for handling. Rolled and shaped plates shall be provided with suitable bracing to eliminate distortion during transit, and shall be bundled in uniform lengths. Each bundle shall be marked with a metal tag, hard stamped, secured under steel wrapping. A 2000 kg limitation shall be imposed for lifts in this category unless exempted.

Copyrights EIL – All rights reserved

Page 227 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

4.4 Itemized Equipment

Units or parts belonging to main equipment but separately packed shall be clearly marked for easy identification with the main equipment to which they relate.

All flanges, machined working surfaces and threaded parts of all equipment shall be suitably protected. All flanged connections of vessels shall be protected by metal plates correctly casketed by wooden plugs or plastic caps suitably secured in position.

Vessels shall, where possible, be packed on skid constructions and secured with adjustable steel straps. Manholes and other major openings shall be protected with cover flanges or metallic plates firmly secured. Smaller openings shall be closed with plastic plugs / caps.

All vessel internals and items not installed by Supplier at works including accessories such as small parts, bolts, nuts, gaskets, etc. shall be packed in wooden cases separately for each vessel or apparatus and marked with the same item number as the vessel/apparatus in order to protect all parts from loss or damage in transit. Internals, bolts and gaskets for service/ testing operations shall be supplied with the vessels/ items by Supplier and all internal, boxed separately and marked according to marking procedure; each item shall be supplied correctly and identified for field installation by others.

All vessels / heat exchangers or items of such construction shall be dried, thoroughly cleaned inside and be free of all dirt and loose foreign materials. The equipment shall be filled with Nitrogen. Make up arrangement for loss of Nitrogen along with a pressure gauge shall be installed.

Accessories for apparatus and vessels (small parts, bolts, nuts, washers, gaskets, etc.) are to be packed in wooden cases, separately for each apparatus or vessel. These cases must be marked with the same item number as the apparatus / vessel to which they belong. All commissioning spare parts to be packed separately, shall be marked with the relevant main item.

Pumps, compressors, rotating equipment, turbines and motors will require specific packing and preservation as per the relevant Technical Specification. For skidded equipment openings, flange faces, threaded connections, wires, valve stems, and other component parts that may be subjected to mechanical damage or corrosion shall be adequately protected. This protection shall be applied to all components, both those removed and boxed and those remaining in place on the skid assembly. Each skid shall have one box strapped to it containing a complete set of drawings together with a manual covering installation and operating instructions and other pertinent instructions required for reassembly of components that were disassembled for shipment.

4.5 Control Panels and Electrical Devices

Equipment such as control panels, instruments and electrical devices shall be packed in an interior moisture/vapor-proof barrier with a silica gel or comparable desiccant. Desiccants shall be bagged to avoid dispersing in containers. The quantity of desiccant shall be calculated in accordance with the manufacturer's recommendations. Equipment must be secured to the case with bolts, blocks or straps. Adequate precautions (for example, shaft locks to prevent longitudinal / rotational movement of rotor shafts in motors) shall be included in the packaging of all equipment which has plain, ball or roller bearings so as to minimize the risk of bearing damage.

Copyrights EIL – All rights reserved

Page 228 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

4.6 Instruments

Instruments shall be thoroughly clean, dry and free from rust, shall be individually wrapped using polythene sheets/U foam/ thermocol sheets depending upon the items and then packed in wooden boxes. The left out spaces and top of the boxes should be filled with rubberized coir to get proper cushioning effect. Special attention shall be paid for arresting movements of their operating mechanism during transportation. Silica gel or other approved desiccant shall be strapped inside but shall not come into contact with the paintwork.

4.7 Cables

All electric cables to be packed in new cable drums made of steel and painted with epoxy resin paint. Cable ends to be carefully protected before packing. Over the cables polythene sheet should be wrapped and sealed properly. Cable drum can be put in wooden crates for ease in handling and transportation.

4.8 Saddles, Supports, Spiders and Lifting Equipment

All items which cannot be transported without independent supports must be supplied with Shipping saddles suitable for land and/or ocean transit. Such transport saddles are to be included within the scope of supply. Supplier is to advise of any requirement for lifting beams or other specialized lifting equipment and will include provision for use of such equipment for loading purposes. The *Supplier* is responsible for ensuring that all modules and oversize items are adequately braced and where required, plastic wrapped suitable for transport. Modules and oversize items shall be packaged to prevent damage during transport.

4.9 Assortment Of Package/ Spare Parts for Erection and Commissioning

Equipment and /or parts of different item numbers shall not be packed together in the same package. Small goods such as accessories, spare parts for erection and commissioning and special tools shall be packed separately in respective inner boxes with tags or labels attached there being clearly indicating their contents. In case that such accessories, spare parts and special tools is packed in separate boxes/ crates, item no. of main equipment shall be clearly mentioned in Main Shipping Mark for easy identification.

4.10 Containerization

As required the Supplier shall stuff the goods into 20 or 40 foot container (dry, open top, flat rack etc) Supplier to check the size of container before starting packing of equipment.

4.11 Protection of Cases/Crates

Since shipping containers are in general not water tight, packing in contact with the floor of the container shall be raised in order to prevent it from being damaged by accumulation of water.

It is responsibility of the Supplier to ensure that the cases/crates are stowed, secured and fastened inside the container. The Supplier shall take all the necessary precautions to conform to maximum weight allowed and centre of gravity of the container. The securing and fastening of the crates/cases can be carried out by nailing timbers on the bottom or on the vertical sides of the container.

Copyrights EIL – All rights reserved

Page 229 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

4.12 Air Transport Packing

Air freight of goods and materials will be exceptional and shall be used only for goods and materials urgently required at site, for goods and materials which are highly sensitive to shock or vibrations such as instruments or those of small dimensions and weight.

In all instances the packaging of materials and equipment to be transported by air shall be in accordance with International Air Transport Authority (IATA) regulations. Type of packing depends on the goods to be packed and Supplier may use one of the following types:

- Triple-corrugated container
- Wooden/cardboard packing cases
- Plywood cases

5. Marking

5.1 General

The purpose of the marking is to identify the packages and detail the weight and dimensions to assure efficient and correct handling during transport and upon arrival at destination.

5.2 Marking Instructions & despatch details

Packages and crates will be marked with indelible black paint, resistant to seawater. Marking must be perfectly legible. All packages shall be clearly and properly marked in English language if not otherwise specified

The shipping marks, which will be shall be stenciled on two sides and one end in clear characters at least 5 centimeters high (where crate size permits, otherwise use optimum size for each package dimension).

The texts shall be printed by means of stamps, stencil-plates or electronically. The use of stickers is not allowed, unless securely covered by plastic. Bundles shall be marked by embossing on two metal tags bearing the shipping marks and placed on each side of the package and securely attaching them to the goods. Paint shall be used on metal surfaces.

Labels or tags to be clearly visible and shall be of a quality to remain visible and attached during transit, handling and storage for a minimum period of 12 Months.

When the goods are to be shipped in containers then marking may be stenciled on one end only. However, packages must be stowed in a manner that shows these marks.

Crates containing fragile articles must be packed with special precaution against risk of breakage and must be stenciled on all sides "FRAGILE - HANDLE WITH CARE". Where crates are not to be overturned, Supplier must show on the crates, clear and readily visible identification, to ensure they are kept in the correct position.

Packages/equipment of 2,000 kg or more must be marked with slinging points on all sides, in addition to the centre of gravity marks.

Number packages consecutively i.e. 1 of 10, 2 of 10, etc. Do not duplicate package numbers. SUPPLIER is responsible for any loss or damage caused by incorrect marking.

All cases/crates shall also be marked with the appropriate international standard graphic symbols for handling.

As a minimum, all cases/crates are to be marked clearly on all four sides with:

Copyrights EIL – All rights reserved

Page 230 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

"HANDLE WITH CARE" "RIGHT SIDE UP" "KEEP DRY"

In the case of packages with a single gross weight totaling 2,000 kg and/or a height of more than 1m, the centre of gravity shall be clearly marked with the symbol on two adjoining sides. For all items of equipment with an eccentric centre of gravity this symbol shall be marked at the bottom, side and top of the package.

The slinging and lashing points shall be marked with a chain symbol.

When packing in cases/crates, these packages shall also have metal corners at the slinging points.

External front and rear sides of the boxes shall be planed for writing instructions. To facilitate identification, the required colour coding as per the specifications shall be carried out on each package and on corners of pipes & plates.

Dispatch details such as consigner/consignee address, contract and case details, country of origin, port of delivery, stacking instructions shall be written on one side of the boxes. One copy of packing slip wrapped in polyethylene bag covered with aluminum packing slip holder to be nailed on the external surface of the box. A packing list and preservation instructions shall be enclosed in a clear weatherproof plastic re-sealable envelope stapled to the box such that the receiver may determine contents without opening the container. An additional packing list is to be enclosed in a clear waterproof plastic re-sealable envelope stapled inside the container. Stapling of the envelopes shall not prevent removal of the documents.

5.3 Shipping Marks

Each shipping unit (package) shall be marked as shown below using letters of at least 50 mm in height. Markings shall be shown on the top and two (2) adjacent sides of each shipping unit/package and shall be of waterproof ink or exterior grade, waterproof paint in a colour which produces high contrast with the background. Packages in any one consignment shall be numbered consecutively and in sequence commencing with the number one (1).

(OWNER)

PROJECT

WITH COMPLETE

ADDRESS

VIA (PORT) INDIA

PURCHASE ORDER NO. ----------

NET WEIGHT ---------- KGS. GROSS WEIGHT ---------- KGS.

DIMENSIONS ---------- X ---------- X ---------- CMS

PACKAGE NOS. (SL. NO. OF PACKAGE) OF (TOTAL NO. OF PACKAGES)

TAG / ITEM NO. ----------

COUNTRY OF ORIGIN----------

SHIPPER'S NAME----------

Copyrights EIL – All rights reserved

Page 231 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

The details of the Owner / Project are defined specifically in the Purchase Order / Contract.

5.4 Cautionary Symbols

In order to facilitate loading unloading and handling of cargo, Supplier shall stencil the necessary Cautionary Symbols on the proper place at two (2) opposite ends of the package. Symbols for special handling are illustrated below. These symbols must be used whenever appropriate.

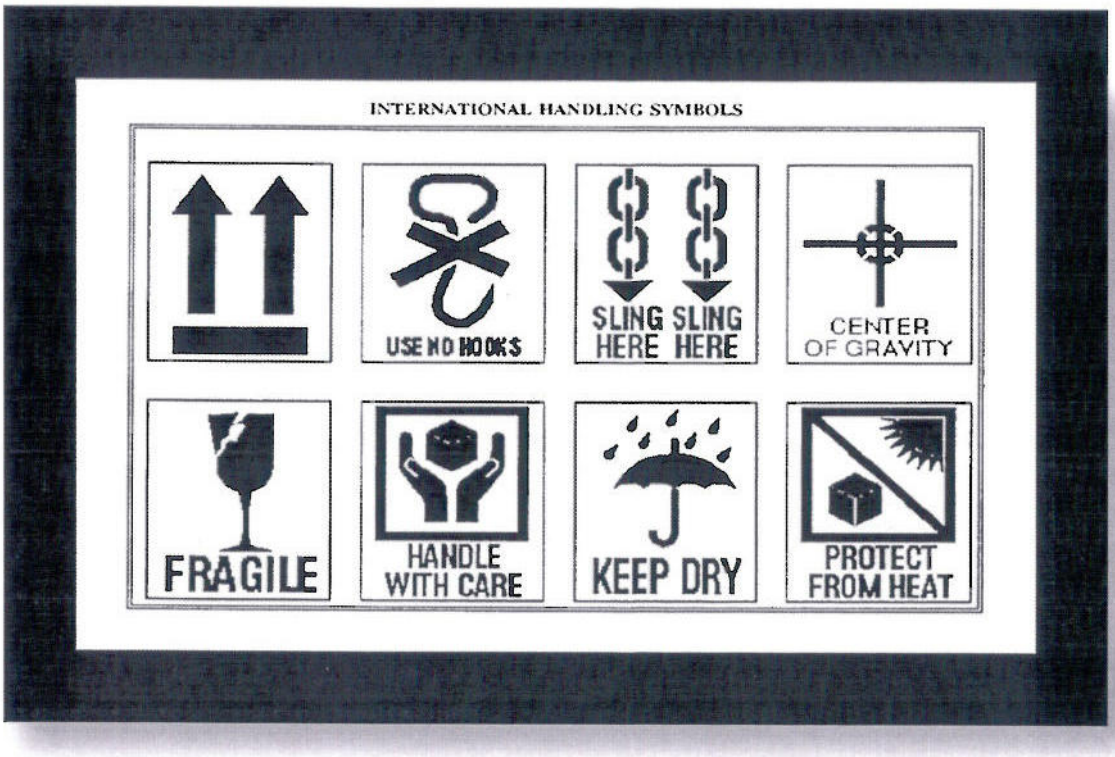

Symbols will be applied with exterior grade paint or waterproof ink in a colour that produces a High contrast with the surrounding background. Easily damaged material shall be Marked "FRAGILE" and also when required, "HANDLE WITHCARE", "COOL STORAGE", and / or "USE NO HOOKS". Material that must be kept upright to prevent damage, such as machinery, motors, etc., will be marked "THIS WAY UP" and if appropriate "TOP HEAVY", with arrows on all sides of box pointing to top. When required, due to length or unbalanced weight, crates or boxes will have a centre of gravity indicated by the relevant symbol and the words "CENTER OF GRAVITY" will appear in letters at least 24mm (1.0 inch) high, adjacent to stripes. Proper placement of the "SLING HERE" symbol will better insure correct use of lifting gear. Special marks, such as "FRAGILE", "KEEP DRY" or positional "DIRECTION ARROWS" shall be in RED.

5.5 Storage Code

The type of storage required is required to be specified, it will be shown on each packaging in RED colour

X	Crates or packages to be stored outdoor without covers
XX	Crates or packages to be stored under tarpaulin
XXX	Crates or packages to be stored in covered or enclosed premises
XXXX	Crates or packages which must be stored in air-conditioned premises

Copyrights EIL – All rights reserved

Page 232 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

6. Shipment:

6.1 By Sea:

For C & F / CIF Contracts

All shipment of Break bulk material and containerized cargo shall be made by suitable vessels certified for sea worthiness and complying with National / International safety regulations .No Trans-shipment is permitted for Break Bulk Cargo. All shipments shall be under-deck unless carriage on deck is unavoidable / permitted by consignee.

6.2 By Air:

Wherever the shipments are to be effected by Air (in case of FCA shipments), the same shall be dispatched through Consolidation Service Agent to be nominated by Owner/EIL.

6.3 Shipping Terms :

All shipping terms will be interpreted in accordance with INCOTERMS 2010 and all subsequent amendments

7. Documentation

7.1 All documents shall be in English Language.

7.2 Documents Required Before Shipment

7.2.1 The required Cargo Details (Preliminary) shall be provided by the supplier within the period defined in the P.O. Final Packing List with weight / dimension of individual package shall be provided to EIL at least four weeks before the contractual / actual date delivery at Port of loading.

Transport and lifting arrangement drawings are to be supplied for all Over –Weight and Over-Dimensioned packages as mentioned below or where shipping saddles are being provided. Such drawings must show clearly full dimensions, weights, centre of gravity, lifting and securing points and saddle locations.

7.2.2 The sketches of Over Dimensioned Cargo shall be mailed as follows :

EIL New Delhi - Head Shipping

EIL Port Office at Discharge Port - In-Charge (Shipping)

The Over Dimensioned Cargo shall mean any package exceeding any of the following limits.

Weight - 18 MT
Length - 12 Meters
Width - 03 Meters
Height - 03 Meters

7.3 Documents Required After Shipment

7.3.1 The supplier shall forward copies of the following shipping documents by E-mail :

1. Commercial Invoice
2. Bill of Lading / Airway Bill

Copyrights EIL – All rights reserved

Page 233 of 342 : B862-000-WB-MR-3138-540-RFQ : Rev. A

3. Packing List
4. Certificate of Origin (issued by Chamber of Commerce of the country of origin)
5. Inspection Release Note to the following:
   a) DGM (Inspection) at EIL New Delhi
   b) Project Manager at EIL New Delhi
   c) Head (Shipping) at EIL New Delhi
   d) In-Charge (Shipping) at EIL Port Office (Port of Discharge)
   e) Owner of the Project

In addition to above, complete set of original documents are required to be sent to (OWNER) / Paying Authority through Bank in terms of 'Letter of Credit'.
The supplier shall be fully responsible for any delay and / or demurrage that may become payable at destination Port on account of delay in transmittal of shipping documents as detailed in the Purchase Order.

7.3.2 In case of air shipments one set of non-negotiable documents consisting of Commercial Invoice (ink signed), Packing List, Certificate of Origin, Technical Literature shall be handed over to Freight Forwarder/Airlines with the instructions that the same should be handed over along with cargo arrival notice and copy of Airway Bill to Destination Airport Notify Party.

7.4 BILL OF LADING :

Bill of lading must be 'clean', must be endorsed "shipped on board" and must show details of gross weight and cubic measurement. If shipment is being arranged by the supplier it must also be endorsed "freight prepaid". Bill of Lading shall be made in favor of (OWNER) /Engineers India Limited/or order of bank (and **not order of the shipper**) and the notify column should indicate Engineers India Ltd. (PORT OFFICE).

7.5 COMMERCIAL INVOICE:

Commercial Invoice shall inter alia, indicate (i) PO No. & Date, (ii) Unit prices, (iii) Total Value, (iv) Full description of goods in conformity with the description of goods given in Purchase Order, (v) Inco Terms, (vi) Payment Terms, (vii) Import License No. (viii) Country of Origin (ix) HSN Code (Harmonized System of Nomenclature), (x) GSTIN No of Consignee.

Invoice value shall be for the materials actually shipped. Billing breakup if required for partial shipment shall be freezed and provided before shipment of the first lot of cargo.

In case of CHEMICALS / HAZARDOUS cargo FLASH-POINT should be indicated in all documents and a separate certificate giving composition and flash-point shall be sent.

7.6 PACKING LIST :

Packing lists shall show (i) PO No.(ii) Details of contents of each case including PO line Item number, Tag Number (Including sub-items and description); (iii) Number of packages by type and total number of packages (i.e. package 1 of 5, 2 of 5 and so on);(iv) Gross and net weight per package (including quantity of items per package);(v) Dimensions and cubic measurements per package in metric units (length, width and height); (vi) Cubic measurements and total gross and net eights of the entire shipment.

Copyrights EIL – All rights reserved

Where containers are used a separate packing list must be produced for each Container. In case of pipes & plates in bundles, no. of pipes / plates with individual length in each bundle must be indicated.

8. SHIPPING ADVICE :

8.1 Within 24 hours of shipment, the supplier shall send shipping advice by e-mail to:

1) Head-Shipping, Engineers India Limited, New Delhi
2) EIL-Port office
3) Owner
4) Insurance Company as detailed in the Purchase Order

Giving particulars of the shipment, vessel's name / Airlines, Flight & Date on which material actually left (and not tentative flight No. and Date), Port of shipment, Bill of Lading / Airway Bill Number & Date, contents in brief, Purchase Order Number, total Invoice and Freight Values, Number of Packages and total gross weight, ETD & ETA of vessel. In case of Air shipment through consolidation services information must contain both Master Airway / House airway Bill Number.

8.2 In case of free replacement / supply of components / parts, the supplier shall intimate by e-mail above dispatch particulars along with specific statement '**Free Supply**' and **Value for customs purposes only**' and particulars of original shipment i.e., vessel name, Bill of Lading Number and date, Invoice Number etc. and send documents to EIL (Port Office) with Invoice bearing this statement.

9. ADDRESSES OF EIL PORT OFFICES

i) Head (Shipping)
Engineers India Ltd
Sector 16,
Gurugram - 122001 (India)
Phone No. +91 124 3802083
E-mail rk.singh@eil.co.in

ii) In-Charge (Shipping)
Engineers India Ltd.
Great Eastern Chambers
5th Floor, Plot No. 28
Sector-11, CBD-Belapur,
Navi Mumbai 400614 (India)
Phone No. + 91 22 27599335
Fax No. +91 22 27572011
E-mail kiran.suvarna@eil.co.in

iii) In-Charge (Shipping)
Engineers India Ltd.
Engineers India Bhavan,
F-9, First Main Road, SIPCOT IT Park,
Siruseri, Chennai-603103.
Phone No. +91 44 27469478(D) / 27469401/02 (Extn.1210)
E-mail vs.krishnaswamy@eil.co.in

10. TRANSIT RISK INSURANCE

All equipments / materials shall be insured against all marine and transit risks on warehouse to warehouse basis by owner and the necessary dispatch intimation shall be

Copyrights EIL – All rights reserved

Page 234 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

sent to the underwriters of Owner (as detailed in the Purchase Order) by Supplier. However, the Supplier shall ensure that in effecting shipments clean Bill of Lading is obtained and the carrier's responsibility is fully retained on the carrier so that consignee's interest are fully safeguarded and are in no way jeopardized.

11. SHORT SHIPMENTS

Supplier should thoroughly check all the items packed before shipment. If any item(s) are found short-packed in sound boxes on examination at project site by EIL, supplier shall be responsible to supply short-packed items free of charge (on Delivery Duty Paid at site basis), on receipt of advice from EIL.

12. Seller shall advise freight forwarder to indicate on the Invoice, Packing List & Bill of lading / Airway bill that the subject import into India is as per the provision of EXIM Policy prevalent in India.

13. Other Services to be provided by Supplier

In addition to packing and shipping documentation Supplier must carry out loading including lifting, securing, lashing and stowing of all cases, crates and packages onto means of transportation such as but not limited to trailers, containers etc.

Copyrights EIL – All rights reserved

Page 235 of 342 ; B862-000-WB-MR-3138-540-RFQ ; Rev. A

Validate | Print | Help

Item Wise BoQ

Tender Inviting Authority: GM (SCM), ENGINEERS INDIA LIMITED, GURUGRAM-122001, HARYANA

Name of Work / Enquiry No.: SUPPLY OF VALVES-CRYOGENIC TOPENTRY BALL & BFV & SPECIAL BFV FOR PDH PP PLANT WITH ETHANE AND PROPANE HANDLING FACILITIES PROJECT AT DAHEJ, GUJARAT OF M/s PLL / RFQ No. : JP/B862-000-WB-MR-3138/540

Preamble to Price Schedule (BoQ):
i) This BOQ1 sheet shall be filled by FOREIGN BIDDER only.
ii) Currency of Quote shall be selected from USD/EUR/GBP/JPY from Column "6".
iii) Supply Price shall be on FOB International Port of Exit basis.
v) Bidders shall quote Ocean Freight charges for Main Equipment till Port of Entry in India at Column No. 8
iv) "SUPPLY PRICE" should be inclusive of all taxes & duties applicable to the bidder but shall exclude Ocean Freight (which is sought separately). Any other charges indicated as applicable "EXTRA" elsewhere in the bid shall be considered "Included" in the quoted "SUPPLY PRICE".
v) Bidder to note that no other charges except those quoted in the Price Schedule (BoQ) shall be considered for evaluation/ordering.
vi) Bidders are advised not to tamper with this BoQ format.
vii) Evaluation & Ordering shall be done on LINE ITEM WISE BASIS. For details of each item, please refer the MR.
viii) In case of any discrepancy in the Item Description/Tag No./ Qty. specified in this Price Schedule vis-à-vis the corresponding details in MR, the Item Description/Tag No./ Qty.specified in MR shall prevail.
ix) In case of any sub-supply or services being offered by an Indigenous sub-supplier of the foreign bidder, prices for the same shall be filled in the adjacent BoQ2.

Name of the Bidder/ Bidding Firm / Company :	

PRICE SCHEDULE(BOQ1)

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevent columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

NUMBER #	TEXT #	NUMBER #	TEXT #	TEXT #	NUMBER #	NUMBER	NUMBER	NUMBER
Sl. No.	Item Description SUPPLY OF ITEMS, AS PER MR / RFQ	Quantity	Units	Quoted Currency in INR / Other Currency	UNIT SUPPLY PRICE ON FOB PORT OF EXIT BASIS AS PER MR (in currency selected as Col '6') (To be filled by bidder)	UNIT OCEAN TRANSPORTATION CHARGES TILL PORT OF ENTRY IN INDIA AS PER MR (in currency selected as Col '6') (To be filled by bidder)	TOTAL SUPPLY PRICE ON FOB PORT OF EXIT BASIS AS PER MR	TOTAL OCEAN TRANSPORTATION CHARGES TILL PORT OF ENTRY IN INDIA AS PER MR
1	2	4	5	6	7	8	9	16
1	VLV.BALL, SHEET 541EQ, CRYO , 0.5 INCH, FULL BORE (AS PER MR)	27.00	Nos.	USD			0.00	0.00
2	VLV.BALL, SHEET 541EQ, CRYO , 0.75 INCH, FULL BORE (AS PER MR)	282.00	Nos.	USD			0.00	0.00
3	VLV.BALL, SHEET 541EQ, CRYO , 1.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	80.00	Nos.	USD			0.00	0.00
4	VLV.BALL, SHEET 541EQ, CRYO , 1.0 INCH, FULL BORE (AS PER MR)	30.00	Nos.	USD			0.00	0.00
5	VLV.BALL, SHEET 541EQ, CRYO , 1.5 INCH, FULL BORE (AS PER MR)	24.00	Nos.	USD			0.00	0.00
6	VLV.BALL, SHEET 543TN, CRYO , 2.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	16.00	Nos.	USD			0.00	0.00
7	VLV.BALL, SHEET 543TN, CRYO , 2.0 INCH, LOCK CLOSED, FULL BORE (AS PER MR)	7.00	Nos.	USD			0.00	0.00
8	VLV.BALL, SHEET 543TN, CRYO , 2.0 INCH, FULL BORE (AS PER MR)	9.00	Nos.	USD			0.00	0.00
9	VLV.BALL, SHEET 543TN, CRYO , 3.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
10	VLV.BALL, SHEET 543TN, CRYO , 3.0 INCH, LOCK CLOSED, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
11	VLV.BALL, SHEET 543TN, CRYO , 3.0 INCH, FULL BORE (AS PER MR)	3.00	Nos.	USD			0.00	0.00
12	VLV.BALL, SHEET 543TN, CRYO , 4.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
13	VLV.BALL, SHEET 543TN, CRYO , 4.0 INCH, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
14	VLV.BALL, SHEET 543TN, CRYO , 6.0 INCH, FULL BORE (AS PER MR)	3.00	Nos.	USD			0.00	0.00
15	VLV.BALL, SHEET 543TN, CRYO , 8.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	1.00	Nos.	USD			0.00	0.00
16	VLV.BALL, SHEET 543TN, CRYO , 10.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
17	VLV.BALL, SHEET 543TN, CRYO , 10.0 INCH, LOCK CLOSED, FULL BORE (AS PER MR)	3.00	Nos.	USD			0.00	0.00
18	VLV.BALL, SHEET 543TN, CRYO , 10.0 INCH, FULL BORE (AS PER MR)	12.00	Nos.	USD			0.00	0.00
19	VLV.BALL, SHEET 543TN, CRYO , 16.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
20	VLV.BALL, SHEET 543UL, CRYO , 0.5 INCH, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
21	VLV.BALL, SHEET 543UL, CRYO , 0.75 INCH, FULL BORE (AS PER MR)	9.00	Nos.	USD			0.00	0.00
22	VLV.BALL, SHEET 543UL, CRYO , 1.0 INCH, FULL BORE (AS PER MR)	3.00	Nos.	USD			0.00	0.00
23	VLV.BALL, SHEET 543UL, CRYO , 1.5 INCH, FULL BORE (AS PER MR)	18.00	Nos.	USD			0.00	0.00
24	VLV.BALL, SHEET 545TN, CRYO , 10.0 INCH, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
25	VLV.BALL, SHEET 545TN, CRYO , 12.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	1.00	Nos.	USD			0.00	0.00

26	VLV.BALL, SHEET 545UL, CRYO , 1.0 INCH, FULL BORE (AS PER MR)	3.00	Nos.	USD			0.00	0.00
27	VLV.BALL, SHEET 545UL, CRYO , 1.5 INCH, FULL BORE (AS PER MR)	4.00	Nos.	USD			0.00	0.00
28	VLV.BALL, SHEET 546EQ, CRYO , 2.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	82.00	Nos.	USD			0.00	0.00
29	VLV.BALL, SHEET 546EQ, CRYO , 2.0 INCH, LOCK CLOSED, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
30	VLV.BALL, SHEET 546EQ, CRYO , 2.0 INCH, FULL BORE (AS PER MR)	212.00	Nos.	USD			0.00	0.00
31	VLV.BALL, SHEET 546EQ, CRYO , 3.0 INCH, FULL BORE (AS PER MR)	10.00	Nos.	USD			0.00	0.00
32	VLV.BALL, SHEET 546EQ, CRYO , 6.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	4.00	Nos.	USD			0.00	0.00
33	VLV.BALL, SHEET 546EQ, CRYO , 8.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	1.00	Nos.	USD			0.00	0.00
34	VLV.BALL, SHEET 546EQ, CRYO , 12.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	19.00	Nos.	USD			0.00	0.00
35	VLV.BALL, SHEET 546EQ, CRYO , 14.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	12.00	Nos.	USD			0.00	0.00
36	VLV.BALL, SHEET 546EQ, CRYO , 16.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	12.00	Nos.	USD			0.00	0.00
37	VLV.BALL, SHEET 546EQ, CRYO , 20.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	12.00	Nos.	USD			0.00	0.00
38	VLV.BALL, SHEET 546EQ, CRYO , 20.0 INCH, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
39	VLV.BALL, SHEET 546EQ, CRYO , 24.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	6.00	Nos.	USD			0.00	0.00
40	VLV.BALL, SHEET 546EQ, CRYO , 30.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	9.00	Nos.	USD			0.00	0.00
41	VLV.BALL, SHEET 546TN, CRYO , 2.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	19.00	Nos.	USD			0.00	0.00
42	VLV.BALL, SHEET 546TN, CRYO , 2.0 INCH, FULL BORE (AS PER MR)	50.00	Nos.	USD			0.00	0.00
43	VLV.BALL, SHEET 546TN, CRYO , 3.0 INCH, FULL BORE (AS PER MR)	12.00	Nos.	USD			0.00	0.00
44	VLV.BALL, SHEET 546TN, CRYO , 8.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	4.00	Nos.	USD			0.00	0.00
45	VLV.BALL, SHEET 546TN, CRYO , 8.0 INCH, FULL BORE (AS PER MR)	2.00	Nos.	USD			0.00	0.00
46	VLV.BALL, SHEET 546TN, CRYO , 16.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	5.00	Nos.	USD			0.00	0.00
47	VLV.BALL, SHEET 546TN, CRYO , 16.0 INCH, FULL BORE (AS PER MR)	1.00	Nos.	USD			0.00	0.00
48	VLV.BALL, SHEET 546UL, CRYO , 0.5 INCH, FULL BORE (AS PER MR)	5.00	Nos.	USD			0.00	0.00
49	VLV.BALL, SHEET 546UL, CRYO , 0.75 INCH, FULL BORE (AS PER MR)	65.00	Nos.	USD			0.00	0.00
50	VLV.BALL, SHEET 546UL, CRYO , 1.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	20.00	Nos.	USD			0.00	0.00
51	VLV.BALL, SHEET 546UL, CRYO , 1.0 INCH, FULL BORE (AS PER MR)	35.00	Nos.	USD			0.00	0.00
52	VLV.BALL, SHEET 546UL, CRYO , 1.5 INCH, FULL BORE (AS PER MR)	5.00	Nos.	USD			0.00	0.00
53	VLV.BTRFLY, SHEET 563AD, LT , 30.0 INCH, LOCK OPEN (AS PER MR)	2.00	Nos.	USD			0.00	0.00
54	VLV.BTRFLY, SHEET 563TP, CRYO , 54.0 INCH, LOCK OPEN (AS PER MR)	2.00	Nos.	USD			0.00	0.00
55	VLV.BTRFLY, SHEET 564AN, LTH2 , 32.0 INCH, LOCK OPEN (AS PER MR)	6.00	Nos.	USD			0.00	0.00
56	VLV.BTRFLY, SHEET 566AE , 30.0 INCH (AS PER MR)	2.00	Nos.	USD			0.00	0.00
57	VLV.BTRFLY, SHEET 566EQ, CRYO , 30.0 INCH, LOCK OPEN (AS PER MR)	2.00	Nos.	USD			0.00	0.00

Item Wise BoQ

Tender Inviting Authority: GM (SCM), ENGINEERS INDIA LIMITED, GURUGRAM-122001, HARYANA

Name of Work / Enquiry No.: SUPPLY OF VALVES-CRYOGENIC TOPENTRY BALL & BFV & SPECIAL BFV FOR PDH PP PLANT WITH ETHANE AND PROPANE HANDLING FACILITIES PROJECT AT DAHEJ, GUJARAT OF M/s PLL / RFQ No. : JP/B862-000-WB-MR-3138/540

Preamble to Price Schedule (BoQ):
i) This BOQ2 sheet shall be filled by INDIAN BIDDER OR INDIAN SUB-SUPPLIER OF FOREIGN BIDDER only.
ii) Currency of Quote shall be selected from INR only.
iii) Basic Supply Price shall be on FOT Despatch point basis.
iv) Bidders shall quote Road Transportation charges till Site at Column No. 8
v) "SUPPLY PRICE" should be inclusive of all taxes & duties (except GST) applicable to the bidder but shall exclude Road Transportation charges (which is sought separately). Any other charges indicated as applicable "EXTRA" elsewhere in the bid shall be considered "Included" in the quoted "SUPPLY PRICE".
vii) Bidder to note that no other charges except those quoted in the Price Schedule (BoQ) shall be considered for evaluation/ordering.
viii) Bidders are advised not to tamper with this BoQ format.
ix)Evaluation & Ordering shall be done on LEAST COST COMBINATION BASIS. For details of each item, please refer the MR.
x) In case of any discrepancy in the Item Description/Tag No./ Qty. specified in this Price Schedule vis-à-vis the corresponding details in MR, the Item Description/Tag No./ Qty.specified in MR shall prevail.
xi) Bidder to submit the details of builit in CIF Value as per the format enclosed as " CIF Format"

Name of the Bidder/ Bidding Firm / Company :	

PRICE SCHEDULE(BOQ1)

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevent columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

NUMBER #	TEXT #	NUMBER #	TEXT #	TEXT #	NUMBER #	NUMBER	NUMBER	NUMBER
Sl. No.	BLOCK No./ Item Description SUPPLY OF ITEMS, AS PER MR / RFQ	Quantity	Units	Quoted Currency in INR / Other Currency	UNIT SUPPLY PRICE ON FOT Despatch Point basis AS PER MR Excld GST (in currency selected as Col '12') (To be filled by bidder)	UNIT Road TRANSPORTATION CHARGES TILL Site AS PER MR Excld GST (in currency selected as Col '12') (To be filled by bidder)	TOTAL SUPPLY PRICE ON FOT Despatch Point basis AS PER MR Excld GST	TOTAL Road TRANSPORTATION CHARGES TILL Site AS PER MR Excld GST
1	2	4	5	12	7	8	9	16
1	VLV.BALL, SHEET 541EQ, CRYO , 0.5 INCH, FULL BORE (AS PER MR)	27.00	Nos.	INR			1.00	0.00
2	VLV.BALL, SHEET 541EQ, CRYO , 0.75 INCH, FULL BORE (AS PER MR)	282.00	Nos.	INR			0.00	0.00
3	VLV.BALL, SHEET 541EQ, CRYO , 1.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	80.00	Nos.	INR			0.00	0.00
4	VLV.BALL, SHEET 541EQ, CRYO , 1.0 INCH, FULL BORE (AS PER MR)	30.00	Nos.	INR			0.00	0.00
5	VLV.BALL, SHEET 541EQ, CRYO , 1.5 INCH, FULL BORE (AS PER MR)	24.00	Nos.	INR			0.00	0.00
6	VLV.BALL, SHEET 543TN, CRYO , 2.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	16.00	Nos.	INR			0.00	0.00
7	VLV.BALL, SHEET 543TN, CRYO , 2.0 INCH, LOCK CLOSED, FULL BORE (AS PER MR)	7.00	Nos.	INR			0.00	0.00
8	VLV.BALL, SHEET 543TN, CRYO , 2.0 INCH, FULL BORE (AS PER MR)	9.00	Nos.	INR			0.00	0.00
9	VLV.BALL, SHEET 543TN, CRYO , 3.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
10	VLV.BALL, SHEET 543TN, CRYO , 3.0 INCH, LOCK CLOSED, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
11	VLV.BALL, SHEET 543TN, CRYO , 3.0 INCH, FULL BORE (AS PER MR)	3.00	Nos.	INR			0.00	0.00
12	VLV.BALL, SHEET 543TN, CRYO , 4.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
13	VLV.BALL, SHEET 543TN, CRYO , 4.0 INCH, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
14	VLV.BALL, SHEET 543TN, CRYO , 6.0 INCH, FULL BORE (AS PER MR)	3.00	Nos.	INR			0.00	0.00
15	VLV.BALL, SHEET 543TN, CRYO , 8.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	1.00	Nos.	INR			0.00	0.00
16	VLV.BALL, SHEET 543TN, CRYO , 10.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
17	VLV.BALL, SHEET 543TN, CRYO , 10.0 INCH, LOCK CLOSED, FULL BORE (AS PER MR)	3.00	Nos.	INR			0.00	0.00
18	VLV.BALL, SHEET 543TN, CRYO , 10.0 INCH, FULL BORE (AS PER MR)	12.00	Nos.	INR			0.00	0.00

19	VLV.BALL, SHEET 543TN, CRYO , 16.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
20	VLV.BALL, SHEET 543UL, CRYO , 0.5 INCH, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
21	VLV.BALL, SHEET 543UL, CRYO , 0.75 INCH, FULL BORE (AS PER MR)	9.00	Nos.	INR			0.00	0.00
22	VLV.BALL, SHEET 543UL, CRYO , 1.0 INCH, FULL BORE (AS PER MR)	3.00	Nos.	INR			0.00	0.00
23	VLV.BALL, SHEET 543UL, CRYO , 1.5 INCH, FULL BORE (AS PER MR)	18.00	Nos.	INR			0.00	0.00
24	VLV.BALL, SHEET 545TN, CRYO , 10.0 INCH, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
25	VLV.BALL, SHEET 545TN, CRYO , 12.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	1.00	Nos.	INR			0.00	0.00
26	VLV.BALL, SHEET 545UL, CRYO , 1.0 INCH, FULL BORE (AS PER MR)	3.00	Nos.	INR			0.00	0.00
27	VLV.BALL, SHEET 545UL, CRYO , 1.5 INCH, FULL BORE (AS PER MR)	4.00	Nos.	INR			0.00	0.00
28	VLV.BALL, SHEET 546EQ, CRYO , 2.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	82.00	Nos.	INR			0.00	0.00
29	VLV.BALL, SHEET 546EQ, CRYO , 2.0 INCH, LOCK CLOSED, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
30	VLV.BALL, SHEET 546EQ, CRYO , 2.0 INCH, FULL BORE (AS PER MR)	212.00	Nos.	INR			0.00	0.00
31	VLV.BALL, SHEET 546EQ, CRYO , 3.0 INCH, FULL BORE (AS PER MR)	10.00	Nos.	INR			0.00	0.00
32	VLV.BALL, SHEET 546EQ, CRYO , 6.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	4.00	Nos.	INR			0.00	0.00
33	VLV.BALL, SHEET 546EQ, CRYO , 8.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	1.00	Nos.	INR			0.00	0.00
34	VLV.BALL, SHEET 546EQ, CRYO , 12.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	19.00	Nos.	INR			0.00	0.00
35	VLV.BALL, SHEET 546EQ, CRYO , 14.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	12.00	Nos.	INR			0.00	0.00
36	VLV.BALL, SHEET 546EQ, CRYO , 16.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	12.00	Nos.	INR			0.00	0.00
37	VLV.BALL, SHEET 546EQ, CRYO , 20.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	12.00	Nos.	INR			0.00	0.00
38	VLV.BALL, SHEET 546EQ, CRYO , 20.0 INCH, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
39	VLV.BALL, SHEET 546EQ, CRYO , 24.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	6.00	Nos.	INR			0.00	0.00
40	VLV.BALL, SHEET 546EQ, CRYO , 30.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	9.00	Nos.	INR			0.00	0.00
41	VLV.BALL, SHEET 546TN, CRYO , 2.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	19.00	Nos.	INR			0.00	0.00
42	VLV.BALL, SHEET 546TN, CRYO , 2.0 INCH, FULL BORE (AS PER MR)	50.00	Nos.	INR			0.00	0.00
43	VLV.BALL, SHEET 546TN, CRYO , 3.0 INCH, FULL BORE (AS PER MR)	12.00	Nos.	INR			0.00	0.00
44	VLV.BALL, SHEET 546TN, CRYO , 8.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	4.00	Nos.	INR			0.00	0.00
45	VLV.BALL, SHEET 546TN, CRYO , 8.0 INCH, FULL BORE (AS PER MR)	2.00	Nos.	INR			0.00	0.00
46	VLV.BALL, SHEET 546TN, CRYO , 16.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	5.00	Nos.	INR			0.00	0.00
47	VLV.BALL, SHEET 546TN, CRYO , 16.0 INCH, FULL BORE (AS PER MR)	1.00	Nos.	INR			0.00	0.00
48	VLV.BALL, SHEET 546UL, CRYO , 0.5 INCH, FULL BORE (AS PER MR)	5.00	Nos.	INR			0.00	0.00
49	VLV.BALL, SHEET 546UL, CRYO , 0.75 INCH, FULL BORE (AS PER MR)	65.00	Nos.	INR			0.00	0.00

50	VLV.BALL, SHEET 546UL, CRYO , 1.0 INCH, LOCK OPEN, FULL BORE (AS PER MR)	20.00	Nos.	INR			0.00	0.00
51	VLV.BALL, SHEET 546UL, CRYO , 1.0 INCH, FULL BORE (AS PER MR)	35.00	Nos.	INR			0.00	0.00
52	VLV.BALL, SHEET 546UL, CRYO , 1.5 INCH, FULL BORE (AS PER MR)	5.00	Nos.	INR			0.00	0.00
53	VLV.BTRFLY, SHEET 563AD, LT , 30.0 INCH, LOCK OPEN (AS PER MR)	2.00	Nos.	INR			0.00	0.00
54	VLV.BTRFLY, SHEET 563TP, CRYO , 54.0 INCH, LOCK OPEN (AS PER MR)	2.00	Nos.	INR			0.00	0.00
55	VLV.BTRFLY, SHEET 564AN, LTH2 , 32.0 INCH, LOCK OPEN (AS PER MR)	6.00	Nos.	INR			0.00	0.00
56	VLV.BTRFLY, SHEET 566AE , 30.0 INCH (AS PER MR)	2.00	Nos.	INR			0.00	0.00
57	VLV.BTRFLY, SHEET 566EQ, CRYO , 30.0 INCH, LOCK OPEN (AS PER MR)	2.00	Nos.	INR			0.00	0.00

DETAILS OF BUILT-IN-CIF VALUE OF IMPORT CONTENT (RAW MATERIALS)

Name of Work / Enquiry No.: SUPPLY OF VALVES-CRYOGENIC TOPENTRY BALL & BFV & SPECIAL BFV FOR PDH PP PLANT WITH ETHANE AND PROPANE HANDLING FACILITIES PROJECT AT DAHEJ, GUJARAT OF M/s PLL / RFQ No. : JP/B862-000-WB-MR-3138/540	FORMAT CIF/CD

NAME OF BIDDER : M/S

OFFER REFERENCE NO.:

ITEMWISE BREAK-UP OF BUILT-IN-CIF VALUE OF IMPORT CONTENT, ITEM DETAILS OF IMPORT CONTENT AND RATES OF IMPORTS DUTY CONSIDERED AND INCLUDED IN QUOTED FOT DESPATCH POINT PRICES UNDER PRICE SCHEDULE BOQ1

NAME OF BIDDER:

	DESCRIPTION			Total MR item wise CIF value of Import Content included in quoted supply prices of MR item (In Rs)		DETAILS OF CUSTOME DUTY INCLUDED IN QUOTED SUPPLY PRICES OF MR ITEM		
S no.	For Item S. No. as per MR	Description of Imported items	Qty.	In Figures	In Words	CUSTOM TARIFF No.	BASIC CUSTOMS DUTY (%)	SOCIAL WELFARE SURCHARGE ON CUSTOM DUTY (%)
1								
2								
3								
4								
5								
6								
7								
8								

Note:

1	Bidder has to ensure that currency quoted in this format shall be INR only.
2	Un-priced copy shall be furnished exactly duplicate of price schedule duly indicating rate of duties except for CIF value.
3	The CIF Value(s) indicated by the vendor shall be deemed to be the maximum value(s) for the purpose of payment of variation in Basic Custom Duty and Customs Social Welfare Surcharge.
4	Bidder to consider input tax credit of IGST avilable at their end (in case of import of raw materials / component) in their prices; hence bidder shall not indicate GST in above table.

MATERIAL REQUISITION(TOP SHEET)

ITEM : VALVES-CRYOGENIC TOPENTRY BALL & BFV & SPECIAL BFV

MR Category : II

Issue Status (*Fill 1 or 2 from below in this bracket*) [ ]

1. -> Entire Requisition Issued

2. -> Only Revised Pages are Issued

PDD ITEMCODE : -

DOCUMENT NUMBER

(Always quote this document number given below as reference)

B862	000	WB	MR	3138	B	18-11-2025	16/43
JOB NO.	UNIT / AREA	COST CENTRE	DOC CODE	SR. NO	REV	DATE	ORIGINATING DIVN./DEPT

VENDOR CODE	VENDOR NAME

Material to be delivered at (job site) PETRONET LNG LIMITED,DAHEJ, GUJARAT within the delivery period specified in the "Request For Quotation"(RFQ).

Notes :

1. This page is a record of all the Revisions of this Requisition.
2. The nature of the Revision is briefly stated in the "Details" column below, the Requisition in its entirety shall be considered for contractual purposes.
3. When a Requisition is revised, only the revised pages may be issued.
4. When revised pages only are issued, the revised pages shall form part of the original Requisition. The original requisition alongwith the revised pages shall be considered in its entirety for contractual purposes.
5. Vendors are required to quote strictly as per technical specifications / notes stipulated in the material requisition. The offers with deviations are likely to be summarily rejected.

REV	DATE	BY	CHK	APPD.	DETAILS
A	21-08-2025	AG	AB	AB/PS	ISSUED FOR BIDS
B	18-11-2025	AG	AB	AB/PS	ISSUED FOR BIDS

This is a system generated approved document and does not require Signature

This drawing and design it covers are property of ENGINEERS INDIA LIMITED. They are merely loaned on the borrower's express agreement that it will not reproduce, copied, exhibited nor used except in the limited way and private use permitted by written consent given by the lender to the borrower for the intended use.EIL-1641-515 Rev.0 A4-210x297 EIL - 588 A - 216 x 279

LIST OF ATTACHMENT

SR. NO.	DOCUMENT TITLE	DOCUMENT NO.	REVISION	
			NO.	DATE
1	ADDITIONAL TECHNICAL REQUIREMENTS FOR VALVES- CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV	B862-000-16-43-ATR-3138	B	18-NOV-2025
2	VALAVE MATERIAL SPECIFICATION FOR MR B862-000-WB-MR-3138	B862-6-44-0006-3138	0	03-NOV-2025
3	TECHNICAL NOTES FOR VALVES	6-44-0052	8	15-FEB-2023
4	INSPECTION AND TEST PLAN FOR VALVES	6-81-0004	7	08-MAY-2023
5	STANDARD SPECIFICATION FOR POSITIVE MATERIAL IDENTIFICATION (PMI) AT SUPPLIER'S WORK	6-81-0001	4	23-DEC-2021
6	SPECIFICATION FOR QUALITY MANAGEMENT SYSTEM REQUIREMENTS FROM BIDDERS	6-78-0001	2	12-JUN-2020
7	SPECIFICATION FOR DOCUMENTATION REQUIREMENTS FROM SUPPLIERS	6-78-0003	2	12-JUN-2020
8	VENDOR DATA REQUIREMENTS FOR VALVES- CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV	B862-000-16-43-VDR-3138	0	18-NOV-2025
9	TECHNICAL COMPLIANCE FORMAT FOR VALVES- CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV	B862-000-16-43-TCL-3138	B	18-NOV-2025
10	DATA SHEET FOR SPECIAL REQUIREMENTS OF VALVES	B862-000-16-43-DS-3138	A	18-NOV-2025

This drawing and design it covers are property of ENGINEERS INDIA LIMITED. They are merely loaned on the borrower's express agreement that it will not reproduce, copied, exhibited nor used except in the limited way and private use permitted by written consent given by the lender to the borrower for the intended use.EIL-1641-515 Rev.0 A4-210x297 EIL - 588 A - 216 x 279

MR ATTACHMENT

SR.NO.	ITEMCODE	DETAIL DESCRIPTION	QTY.	U.RATE	TOT.VALUE	CDD
Item Description :	***VLV.BALL, SHEET 541EQ, CRYO***					
1	541EQZZZ4049ZZZZZ	0.5 INCH, FULL BORE	27 NOS			
2	541EQZZZ4059ZZZZZ	0.75 INCH, FULL BORE	282 NOS			
3	541EQZZZ40619ZZZZ	1.0 INCH, LOCK OPEN, FULL BORE	80 NOS			
4	541EQZZZ4069ZZZZZ	1.0 INCH, FULL BORE	30 NOS			
5	541EQZZZ4089ZZZZZ	1.5 INCH, FULL BORE	24 NOS			
Item Description :	***VLV.BALL, SHEET 543TN, CRYO***					
6	543TNZZZ40919ZZZZ	2.0 INCH, LOCK OPEN, FULL BORE	16 NOS			
7	543TNZZZ40929ZZZZ	2.0 INCH, LOCK CLOSED, FULL BORE	7 NOS			
8	543TNZZZ4099ZZZZZ	2.0 INCH, FULL BORE	9 NOS			
9	543TNZZZ41119ZZZZ	3.0 INCH, LOCK OPEN, FULL BORE	2 NOS			
10	543TNZZZ41129ZZZZ	3.0 INCH, LOCK CLOSED, FULL BORE	2 NOS			
11	543TNZZZ4119ZZZZZ	3.0 INCH, FULL BORE	3 NOS			
12	543TNZZZ41319ZZZZ	4.0 INCH, LOCK OPEN, FULL BORE	2 NOS			
13	543TNZZZ4139ZZZZZ	4.0 INCH, FULL BORE	2 NOS			
14	543TNZZZ4159ZZZZZ	6.0 INCH, FULL BORE	3 NOS			
15	543TNZZZ41619ZZZZ	8.0 INCH, LOCK OPEN, FULL BORE	1 NOS			
16	543TNZZZ41719ZZZZ	10.0 INCH, LOCK OPEN, FULL BORE	2 NOS			
17	543TNZZZ41729ZZZZ	10.0 INCH, LOCK CLOSED, FULL BORE	3 NOS			
18	543TNZZZ4179ZZZZZ	10.0 INCH, FULL BORE	12 NOS			
19	543TNZZZ42019ZZZZ	16.0 INCH, LOCK OPEN, FULL BORE	2 NOS			
Item Description :	***VLV.BALL, SHEET 543UL, CRYO***					
20	543ULZZZ4049ZZZZZ	0.5 INCH, FULL BORE	2 NOS			
21	543ULZZZ4059ZZZZZ	0.75 INCH, FULL BORE	9 NOS			
22	543ULZZZ4069ZZZZZ	1.0 INCH, FULL BORE	3 NOS			
23	543ULZZZ4089ZZZZZ	1.5 INCH, FULL BORE	18 NOS			
Item Description :	***VLV.BALL, SHEET 545TN, CRYO***					

This drawing and design it covers are property of ENGINEERS INDIA LIMITED. They are merely loaned on the borrower's express agreement that it will not reproduce, copied, exhibited nor used except in the limited way and private use permitted by written consent given by the lender to the borrower for the intended use.EIL-1641-515 Rev.0 A4-210x297 EIL - 588 A - 216 x 279

MR ATTACHMENT

SR.NO.	ITEMCODE	DETAIL DESCRIPTION	QTY.	U.RATE	TOT.VALUE	CDD
24	545TNZZZ4179ZZZZZ	10.0 INCH, FULL BORE	2 NOS			
25	545TNZZZ41819ZZZZ	12.0 INCH, LOCK OPEN, FULL BORE	1 NOS			
Item Description : VLV.BALL, SHEET 545UL, CRYO						
26	545ULZZZ4069ZZZZZ	1.0 INCH, FULL BORE	3 NOS			
27	545ULZZZ4089ZZZZZ	1.5 INCH, FULL BORE	4 NOS			
Item Description : VLV.BALL, SHEET 546EQ, CRYO						
28	546EQZZZ40919ZZZZ	2.0 INCH, LOCK OPEN, FULL BORE	82 NOS			
29	546EQZZZ40929ZZZZ	2.0 INCH, LOCK CLOSED, FULL BORE	2 NOS			
30	546EQZZZ4099ZZZZZ	2.0 INCH, FULL BORE	212 NOS			
31	546EQZZZ4119ZZZZZ	3.0 INCH, FULL BORE	10 NOS			
32	546EQZZZ41519ZZZZ	6.0 INCH, LOCK OPEN, FULL BORE	4 NOS			
33	546EQZZZ41619ZZZZ	8.0 INCH, LOCK OPEN, FULL BORE	1 NOS			
34	546EQZZZ41819ZZZZ	12.0 INCH, LOCK OPEN, FULL BORE	19 NOS			
35	546EQZZZ41919ZZZZ	14.0 INCH, LOCK OPEN, FULL BORE	12 NOS			
36	546EQZZZ42019ZZZZ	16.0 INCH, LOCK OPEN, FULL BORE	12 NOS			
37	546EQZZZ42219ZZZZ	20.0 INCH, LOCK OPEN, FULL BORE	12 NOS			
38	546EQZZZ4229ZZZZZ	20.0 INCH, FULL BORE	2 NOS			
39	546EQZZZ42419ZZZZ	24.0 INCH, LOCK OPEN, FULL BORE	6 NOS			
40	546EQZZZ42719ZZZZ	30.0 INCH, LOCK OPEN, FULL BORE	9 NOS			
Item Description : VLV.BALL, SHEET 546TN, CRYO						
41	546TNZZZ40919ZZZZ	2.0 INCH, LOCK OPEN, FULL BORE	19 NOS			
42	546TNZZZ4099ZZZZZ	2.0 INCH, FULL BORE	50 NOS			
43	546TNZZZ4119ZZZZZ	3.0 INCH, FULL BORE	12 NOS			
44	546TNZZZ41619ZZZZ	8.0 INCH, LOCK OPEN, FULL BORE	4 NOS			
45	546TNZZZ4169ZZZZZ	8.0 INCH, FULL BORE	2 NOS			

This drawing and design it covers are property of ENGINEERS INDIA LIMITED. They are merely loaned on the borrower's express agreement that it will not reproduce, copied, exhibited nor used except in the limited way and private use permitted by written consent given by the lender to the borrower for the intended use.EIL-1641-515 Rev.0 A4-210x297 EIL - 588 A - 216 x 279

MR ATTACHMENT

SR.NO.	ITEMCODE	DETAIL DESCRIPTION	QTY.	U.RATE	TOT.VALUE	CDD
46	546TNZZZ42019ZZZZ	16.0 INCH, LOCK OPEN, FULL BORE	5 NOS			
47	546TNZZZ4209ZZZZZ	16.0 INCH, FULL BORE	1 NOS			
Item Description : VLV.BALL, SHEET 546UL, CRYO						
48	546ULZZZ4049ZZZZZ	0.5 INCH, FULL BORE	5 NOS			
49	546ULZZZ4059ZZZZZ	0.75 INCH, FULL BORE	65 NOS			
50	546ULZZZ40619ZZZZ	1.0 INCH, LOCK OPEN, FULL BORE	20 NOS			
51	546ULZZZ4069ZZZZZ	1.0 INCH, FULL BORE	35 NOS			
52	546ULZZZ4089ZZZZZ	1.5 INCH, FULL BORE	5 NOS			
Item Description : VLV.BTRFLY, SHEET 563AD, LT						
53	563ADZZZ5271ZZZZZ	30.0 INCH, LOCK OPEN	2 NOS			
Item Description : VLV.BTRFLY, SHEET 563TP, CRYO						
54	563TPZZZ4391ZZZZZ	54.0 INCH, LOCK OPEN	2 NOS			
Item Description : VLV.BTRFLY, SHEET 564AN, LTH2						
55	564ANZZZJ281ZZZZZ	32.0 INCH, LOCK OPEN	6 NOS			
Item Description : VLV.BTRFLY, SHEET 566AE						
56	566AEZZZ027ZZZZZZ	30.0 INCH	2 NOS			
Item Description : VLV.BTRFLY, SHEET 566EQ, CRYO						
57	566EQZZZ4271ZZZZZ	30.0 INCH, LOCK OPEN	2 NOS			

This drawing and design it covers are property of ENGINEERS INDIA LIMITED. They are merely loaned on the borrower's express agreement that it will not reproduce, copied, exhibited nor used except in the limited way and private use permitted by written consent given by the lender to the borrower for the intended use.EIL-1641-515 Rev.0 A4-210x297 EIL - 588 A - 216 x 279

ADDITIONAL TECHNICAL REQUIREMENTS

VALVES- CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV

Rev. No	Date	Purpose	Prepared by	Checked by	Approved by
B	18-11-2025	ISSUED FOR BIDS	AG	AB	AB/PS
A	21-08-2025	ISSUED FOR BIDS	AG	AB	AB/PS

Copyright EIL – All rights reserved

ADDITIONAL TECHNICAL REQUIREMENTS

VALVES- CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV

1. Bidder to note that bid evaluation may be carried out without any post bid correspondence.

2. Bidder shall furnish quotations only for those items which he can supply as per MR specification including fulfillment of Qualification Criteria as per MR.

3. If the bid does not include complete scope, technical /performance data, proven track record etc. required to be submitted with the bid, the offer shall be liable for rejection.

4. The submission of prices by the bidder shall be construed to mean that he has confirmed compliance with all technical specifications of the corresponding item(s).

5. Bidders shall ensure compliance to the all specifications/documents as per “List of Attachment” attached with the Material Requisition B862-000-WB-MR-3138.

6. Bidder to note that the qualification criteria specified in clause No. 2.0 of doc. 6-44-0052-A3 (Specification requirements for low temperature and cryogenic valves) is not to be considered. Bidder to follow qualification criteria specified in Bidder Qualification Criteria (BQC) attached elsewhere with MR.

7. Qualified Vendors who do not have cryogenic test reports covering the range of Cryogenic valves quoted for, shall conduct cryogenic test as per clause No. 3.0 of doc. 6-44-0052-A3 (Special requirements for low temperature and cryogenic valves) within 12 weeks from the date of purchase order.

8. All Ball valve & Butterfly valves with butt-weld ends shall be top entry to facilitate the maintenance without cutting the valve out of the line pipe.

9. Valves specified as LO (Lock Open)/ LC (Lock Closed) shall be supplied with arrangement suitable for locking in open as well as in closed position. Lock is included in vendor’s scope. Lock Open/ Lock Closed arrangement with chain is not acceptable.

10. All Butterfly valves specified in the MR shall be designed/ fabricated as per the respective VMS Sheets (B862-6-44-0006-3138) and shall also be suitable to the flow velocities, design temperature & pressure and other requirements specified in Datasheet No. B862-000-16-43-DS-3138.

11. The MR quantity may be increased or decreased upto 25% during ordering. The final quantity shall be as per Purchase requisition.

12. Bidder shall ensure / certify the suitability of all items for the intended service/ process conditions as per the respective VMS Sheets (B862-6-44-0006-3138).

13. Bidder to note that the orientation of the handwheel of ball valves (where ever applicable) could be changed at site during installation. Bidder to provide suitable provision for the same.

Copyright EIL – All rights reserved

14. Item specified with specialty “LTH2” shall comply with the requirement of “LTCS” for LTCS Body valves, and “CRYO” for SS Body valves along with “Hydrogen” Service requirements as specified in Technical Notes of Valves in the MR.

15. All butt-welded ball valves which shall be supplied with “100mm” pup piece/spool piece (welded to each end of the valve) as mentioned in Notes of respective valve material specification sheets and “Clause 3.25” of technical notes of Valves, In place of **“100mm”** pup piece length following table shall be followed for pup piece/spool piece length on either side of the valves.

Valve size (NB)	**Pup piece/Spool piece lengths welded on each end of the valve (MM)**
0.5" to 8"	200
10" TO 16"	250
18" and Above	300

16. For dimensions of ball valves, Clause no. 3.24 of Technical Notes for Valves (6-44-0052) regarding Face to Face / End to End Dimensions of Valves shall be followed to the extent possible, however following to noted.

    a) For 150#, but welded ball valves (sheet no. 543TN & 543UL), the end-to-end dimension of ball valves shall be as per the Dimension “B” for Solid Wedge, Double Disc, and Conduit Gate Valves in ASME B16.10.

    b) For 900#, For sizes not covered under Dimension “B” for Long Pattern Gate Valves, the Dimensions of Long Pattern Ball valves shall be followed as per ASME B16.10.

    c) For 1500#, For sizes not covered under Short Pattern (0.5” & 0.75”), Dimensions shall be as per Manufacturer’s standard.

17. In case of any conflict amongst various documents enclosed with the MR, the most stringent requirement shall govern and Owner/EIL decision in this regard shall be final.

Copyright EIL – All rights reserved

VALVE MATERIAL SPECIFICATION

B862-6-44-0006-3138

Client : **PETRONET LNG LIMITED**

Project : **PDH - PP PLANT**

Location : **DAHEJ, GUJARAT**

Job No. : **B862**

Rev no	Date	Purpose	Prepared by	Checked by	Approved by
0	03/11/2025	ISSUED FOR BIDS	AG	AB	AAB/PPSW

Copyright EIL -All rights reserved

Abbreviations

VMS	:	Valve Material Specifications

Copyright EIL -All rights reserved

CONTENTS

Sl No.	Description	Pages
1	Valve Material Specifications (B862-6-44-0006-3138 Rev.0)	31

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT		

INDEX OF VALVE TAG NOS.

VLV.BALL

541EQ REV 1 , 543TN REV 1 , 543UL REV 1 , 545TN REV 0 , 545UL REV 0 , 546EQ REV 1 , 546TN REV 1 , 546UL REV 1 ,

VLV.BTRFLY

563AD REV 0 , 563TP REV 0 , 564AN REV 0 , 566AE REV 0 , 566EQ REV 0 ,

Notes : 1. For VMS General notes refer Annexure -I of this document
2. For VMS Extracts refer Annexure -II of this document

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**541EQ**

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**541EQ**

BALL VALVE SPECIFICATION

TAG NO. : 541EQ **RATING :** 1500 **STANDARD :** API-6D

SIZE RANGE : 0.50 " TO 1.50 " **ENDS :** BW **TO** B-16.25,

PIPING CLASS : E44K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	FORGED/CAST	ASTM A 182 GR.F316/ASTM A 351 GR.CF8M		
STEM	ANTI BLOWOUT	SS 316 (NO CASTING)		
BALL	SOLID	SS 316		
BODY SEAT		PCTFE WITH SECONDARY METAL TO METAL		
GLAND		SS 316		
STEM SEAL	RENEWABLE WITH VALVE OPEN ON STREAM	GRAFOIL (NOTE-17)		
BODY SEAL		GRAFOIL (NOTE-17)		
BODY STUD		ASTM A 320 GR.B8M CL.2 (IMPACT TESTED)		
BODY NUT		ASTM A 194 GR.8M (IMPACT TESTED)		
OTHERS		FULL PORT, TOP ENTRY, CAVITY RELIEF BALL VALVE, TRUNNION MOUNTED DESIGN		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO (NOTE-16)	MIN. TEMP -196 DEG. C./MAX. TEMP 65 DEG. C.		
SPRING		INCONEL X - 750		
HYDROSTATIC TEST PRESSURE	BODY : 5400 PSIG	SEAT : 3975 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**541EQ**

4 MINIMUM WALL THICKNESS SHALL BE AS PER ASME B16.34.
5 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/BS EN ISO 28921-1 ALSO.
6 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/ GLAND AS PER BS 6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATIONS).
7 TESTING SHALL BE AS PER BS 6364/BS EN ISO 28921-1 & API 598/API 6D.
8 FOR TRUNNION MOUNTED BALL, BODY SEAT SHALL BE SPRING LOADED.
9 FOR CRYO TESTING, ACCEPTABLE LEAKAGE RATES SHALL BE AS PER BS 6364.
10 WELDED ENDS OF BALL VALVES SHALL BE PROVIDED WITH 100 MM LONG PIPE SPOOL PIECES WELDED ON AT VENDOR'S SHOP PRIOR TO ASSEMBLING OF SOFT SEATS (SPOOL PIECE MATERIAL: A312 GR.TP304)
11 PUP PIECE/SPOOL PIECE END SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS : 0.5" TO 1.5" - SCH 80S. PUP PIECE/SPOOL PIECE END SHALL BE MACHINED TO SUIT GIVEN THICKNESS AFTER HYDROTESTING OF VALVE & PUP PIECE/SPOOL PIECE ASSEMBLY.
12 VENDOR SHALL CERTIFY SUITABILITY OF THE VALVE FOR INTENDED SERVICE CONDITIONS.
13 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
14 ALL VALVES SHALL BE FIRE SAFE DESIGN. FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/ ISO 10497)/ API RP 6FA.
15 ALL VALVES SHALL BE PROVIDED WITH ANTISTATIC DEVICES & POSITION INDICATORS.
16 FLUID HANDLED : LIQUID NATURAL GAS, NATURAL GAS (CRYOGENIC SERVICE)
17 BIDDER TO FURNISH SOFT SEAT DETAILS AND TYPE, GRADE & CLASS SELECTED WITH MANUFACTURER'S RECOMMENDATIONS LIKE PRESSURE-TEMPERATURE RATING CURVE/ TABLE.STEAM SEAL/BODY SEAL MATERIAL SHALL BE PROVIDED WITH CORROSION INHIBITOR.
18 ALL VALVES SHALL DOUBLE ISOLATION AND BLEED TYPE WITH TWO BUBBLE TIGHT SEATING SURFACES.
19 FLOW DIRECTION SHALL BE CLEARLY MARKED ON ALL VALVES.
20 PRESSURE RELIEVING DEVICE FOR BODY AND BONNET CAVITY SHALL BE PROVIDED FOR RELIEVING CAVITY PRESSURE IN UPSTREAM SIDE. UPSTREAM SIDE WILL BE STAMPED WITH THE WORD "VENT" ON FLANGE OR BW END.
21 IN ADDITION TO ALL THE OTHER TESTING SPECIFIED, VALVE SHALL BE TESTED AS PER L.11 OF API-6D.
22 FOR FIRE SAFETY, VALVE MANUFACTURER MUST INSTALL GRAFOIL PACKING RINGS SANDWICHED BETWEEN TWO WIPER RINGS.
23 VALVE SHALL BE OF FULL PORT DESIGN.
24 ALL CRYOGENIC BALL VALVES (CAVITY RELIEF BALL VALVES) SHALL HAVE BIDIRECTIONAL SEALING (REFER NOTE-18 ALSO).
25 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
26 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
27 100 % VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
28 ALL VALVE SIZES SHALL BE OF TRUNNION MOUNTED DESIGN

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**543TN**

BALL VALVE SPECIFICATION

TAG NO. : **543TN** **RATING :** 150 **STANDARD :** BS EN ISO 17292

SIZE RANGE : 2.00 " TO 30.00 " **ENDS :** BW **TO** B-16.25,

PIPING CLASS : A22K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	CAST/FORGED	ASTM A 351 GR.CF8/ASTM A 182 GR.F304		
STEM	ANTI BLOWOUT	SS304/SS 316/XM-19 (NO CASTING)		
BALL	SOLID	SS304/SS 316		
BODY SEAT		PCTFE WITH SECONDARY METAL TO METAL		
GLAND	BOLTED/ RETAINED BY NUT & WASHER	SS 304/SS 316		
STEM SEAL	RENEWABLE WITH VALVE OPEN ON STREAM	GRAFOIL (NOTE-14)		
BODY SEAL		GRAFOIL (NOTE-14)		
BODY STUD		ASTM A 320 GR.B8M CL.2 (IMPACT TESTED)		
BODY NUT		ASTM A 194 GR.8M (IMPACT TESTED)		
OTHERS		FULL PORT, TOP ENTRY, CAVITY RELIEF BALL VALVE, TRUNNION MOUNTED DESIGN		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO(NOTE-22)	MIN. TEMP -196 DEG. C. & MAX. TEMP. 170 DEG. C		
SPRING		INCONEL X - 750		
HYDROSTATIC TEST PRESSURE	BODY : 425 PSIG	SEAT : 325 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**543TN**

4 VALVES CAN ALSO BE SUPPLIED IN ACCORDANCE WITH API-6D. FOR API-6D VALVES, MIN BODY WALL THICKNESS SHALL BE AS PER ASME B16.34.
5 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/BS EN ISO 28921-1 ALSO.
6 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/ GLAND AS PER BS 6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATIONS).
7 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/ ISO 10497)/ API RP 6FA.
8 TESTING SHALL BE AS PER BS 6364/BS EN ISO 28921-1 & BS 12266(PART 1)/API 6D.
9 FOR TRUNNION MOUNTED BALL, BODY SEAT SHALL BE SPRING LOADED.
10 ALL VALVES SHALL DOUBLE ISOLATION AND BLEED TYPE WITH TWO BUBBLE TIGHT SEATING SURFACES.
11 PRESSURE RELIEVING DEVICE FOR BODY AND BONNET CAVITY SHALL BE PROVIDED FOR RELIEVING CAVITY PRESSURE IN UPSTREAM SIDE. UPSTREAM SIDE WILL BE STAMPED WITH THE WORD "VENT" ON FLANGE OR BW END.
12 100 % VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
13 VENDOR SHALL CERTIFY SUITABILITY OF THE VALVE FOR INTENDED SERVICE CONDITIONS.
14 BIDDER TO FURNISH POST ORDER SOFT SEAT DETAILS AND TYPE, GRADE & CLASS SELECTED WITH MANUFACTURER'S RECOMMENDATIONS LIKE PRESSURE-TEMPERATURE RATING CURVE/TABLE. STEM SEAL/BODY SEAL MATERIAL SHALL BE PROVIDED WITH CORROSION INHIBITOR
15 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
16 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
17 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
18 PUP PIECE/SPOOL PIECE END SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS: 2.0" - SCH 40S, 3" TO 24" - SCH 10S, 26"-6.35MM & 30"-SCH. 10S. PUP PIECE/SPOOL PIECE END SHALL BE MACHINED TO SUIT GIVEN THICKNESS AFTER HYDROTESTING OF VALVE & PUP PIECE/SPOOL PIECE ASSEMBLY.
19 WELDED ENDS OF BALL VALVES SHALL BE PROVIDED WITH 100 MM LONG SPOOL PIECES WELDED ON AT VENDOR'S SHOP PRIOR TO ASSEMBLING OF SOFT SEATS (SPOOL PIECE MATERIAL: A312 GR.TP304 FOR VALVES UP TO SIZE 8" & ASTM A358 TP 304 CL.1 FOR SIZE 10" & ABOVE.).
20 FOR CRYO TESTING, ACCEPTABLE LEAKAGE RATES SHALL BE AS PER BS 6364.
21 ALL VALVES SHALL BE PROVIDED WITH ANTISTATIC DEVICES & POSITION INDICATORS.
22 FLUID HANDLED : LIQUIFIED NATURAL GAS, NATURAL GAS, FLARE GAS, FUEL GAS (CRYOGENIC SERVICE)
23 FLOW DIRECTION SHALL BE CLEARLY MARKED ON ALL VALVES.
24 IN ADDITION TO ALL THE OTHER TESTING SPECIFIED, VALVE SHALL BE TESTED AS PER L.11 OF API-6D.
25 VALVE SHALL BE OF FULL PORT DESIGN.
26 ALL CRYOGENIC BALL VALVES (CAVITY RELIEF BALL VALVES) SHALL HAVE BIDIRECTIONAL SEALING (REFER NOTE-10 ALSO).
27 ALL VALVE SIZES SHALL BE OF TRUNNION MOUNTED DESIGN

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**543UL**

BALL VALVE SPECIFICATION

TAG NO. : **543UL** **RATING :** 150 **STANDARD :** BS EN ISO 17292

SIZE RANGE : 0.50 " TO 1.50 " **ENDS :** BW **TO** B-16.25,

PIPING CLASS : A22K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	FORGED/CAST	ASTM A 182 GR.F304/ASTM A 351 GR.CF8		
STEM	ANTI BLOWOUT	SS304/SS 316/XM-19 (NO CASTING)		
BALL	SOLID	SS304/SS 316		
BODY SEAT		PCTFE WITH SECONDARY METAL TO METAL		
GLAND	BOLTED/ RETAINED BY NUT & WASHER	SS 304/SS316		
STEM SEAL	RENEWABLE WITH VALVE OPEN ON STREAM	GRAFOIL (NOTE-14)		
BODY SEAL		GRAFOIL (NOTE-14)		
BODY STUD		ASTM A 320 GR.B8M CL.2 (IMPACT TESTED)		
BODY NUT		ASTM A 194 GR.8M (IMPACT TESTED)		
OTHERS		FULL PORT, TOP ENTRY, CAVITY RELIEF BALL VALVES, TRUNNION MOUNTED DESIGN		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO (NOTE-16)	MIN. TEMP -196 DEG. C./MAX. TEMP. 170 DEG. C.		
SPRING		INCONEL X - 750		
HYDROSTATIC TEST PRESSURE	BODY : 425 PSIG	SEAT : 325 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**543UL**

4 VALVES CAN ALSO BE SUPPLIED IN ACCORDANCE WITH API-6D. FOR API-6D VALVES, MIN BODY WALL THICKNESS SHALL BE AS PER ASME B16.34.
5 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/BS EN ISO 28921-1 ALSO.
6 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/ GLAND AS PER BS 6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATIONS).
7 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/ ISO 10497) / API RP 6FA.
8 TESTING SHALL BE AS PER BS 6364/BS EN ISO 28921-1 & BS 12266(PART 1)/API 6D.
9 WELDED ENDS OF BALL VALVES SHALL BE PROVIDED WITH 100 MM LONG SPOOL PIECES WELDED ON AT VENDOR'S SHOP PRIOR TO ASSEMBLING OF SOFT SEATS (SPOOL PIECE MATERIAL: A312 GR.TP304).
10 VENDOR SHALL CERTIFY SUITABILITY OF THE VALVE FOR INTENDED SERVICE CONDITIONS.
11 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
12 FOR CRYO TESTING, ACCEPTABLE LEAKAGE RATES SHALL BE AS PER BS 6364.
13 ALL VALVES SHALL BE PROVIDED WITH ANTISTATIC DEVICES & POSITION INDICATORS.
14 BIDDER TO FURNISH SOFT SEAT DETAILS AND TYPE, GRADE & CLASS SELECTED WITH MANUFACTURER'S RECOMMENDATIONS LIKE PRESSURE-TEMPERATURE RATING CURVE/TABLE. STEM SEAL/BODY SEAL MATERIAL SHALL BE PROVIDED WITH CORROSION INHIBITOR
15 PUP PIECE/SPOOL PIECE END SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS: 0.5" TO .75"- SCH 80S & 1.0" TO 1.5"- SCH 40S. PUP PIECE/SPOOL PIECE END SHALL BE MACHINED TO SUIT GIVEN THICKNESS AFTER HYDROTESTING OF VALVE & PUP PIECE/SPOOL PIECE ASSEMBLY.
16 FLUID HANDLED : LIQUIFIED NATURAL GAS, NATURAL GAS, FLARE GAS, FUEL GAS (CRYOGENIC SERVICE)
17 ALL VALVES SHALL DOUBLE ISOLATION AND BLEED TYPE WITH TWO BUBBLE TIGHT SEATING SURFACES.
18 FLOW DIRECTION SHALL BE CLEARLY MARKED ON ALL VALVES.
19 PRESSURE RELIEVING DEVICE FOR BODY AND BONNET CAVITY SHALL BE PROVIDED FOR RELIEVING CAVITY PRESSURE IN UPSTREAM SIDE. UPSTREAM SIDE WILL BE STAMPED WITH THE WORD "VENT" ON FLANGE OR BW END.
20 IN ADDITION TO ALL THE OTHER TESTING SPECIFIED, VALVE SHALL BE TESTED AS PER L.11 OF API-6D.
21 VALVE SHALL BE OF FULL PORT DESIGN.
22 ALL CRYOGENIC BALL VALVES (CAVITY RELIEF BALL VALVES) SHALL HAVE BIDIRECTIONAL SEALING (REFER NOTE-17 ALSO).
23 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
24 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
25 100 % VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
26 ALL VALVE SIZES SHALL BE OF TRUNNION MOUNTED DESIGN
27 FOR TRUNNION MOUNTED BALL, BODY SEAT SHALL BE SPRING LOADED.

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**545TN**

BALL VALVE SPECIFICATION

TAG NO. : **545TN** **RATING :** 600 **STANDARD :** BS EN ISO 17292

SIZE RANGE : 2.00 " TO 12.00 " **ENDS :** BW **TO** B-16.25,

PIPING CLASS : D22K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	CAST/FORGED	ASTM A 351 GR.CF8/ASTM A 182 GR.F304		
STEM	ANTI BLOWOUT	SS304/SS 316/XM-19 (NO CASTING)		
BALL	SOLID	SS304/SS 316		
BODY SEAT		PCTFE WITH SECONDARY METAL TO METAL		
GLAND	BOLTED/ RETAINED BY NUT & WASHER	SS304/SS 304/SS 316		
STEM SEAL	RENEWABLE WITH VALVE OPEN ON STREAM	GRAFOIL (NOTE-14)		
BODY SEAL		GRAFOIL (NOTE-14)		
BODY STUD		ASTM A 320 GR.B8M CL.2 (IMPACT TESTED)		
BODY NUT		ASTM A 194 GR.8M (IMPACT TESTED)		
OTHERS		FULL PORT, TOP ENTRY, CAVITY RELIEF BALL VALVE, TRUNNION MOUNTED DESIGN		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO(NOTE-22)	MIN. TEMP -196 DEG. C. & MAX. TEMP. 60 DEG. C		
SPRING		INCONEL X - 750		
HYDROSTATIC TEST PRESSURE	BODY : 2175 PSIG	SEAT : 1600 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**545TN**

4 VALVES CAN ALSO BE SUPPLIED IN ACCORDANCE WITH API-6D. FOR API-6D VALVES, MIN BODY WALL THICKNESS SHALL BE AS PER ASME B16.34.
5 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/BS EN ISO 28921-1 ALSO.
6 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/ GLAND AS PER BS 6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATIONS).
7 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/ ISO 10497)/ API RP 6FA.
8 TESTING SHALL BE AS PER BS 6364/BS EN ISO 28921-1& BS 12266(PART 1)/API 6D.
9 FOR TRUNNION MOUNTED BALL, BODY SEAT SHALL BE SPRING LOADED.
10 ALL VALVES SHALL DOUBLE ISOLATION AND BLEED TYPE WITH TWO BUBBLE TIGHT SEATING SURFACES.
11 PRESSURE RELIEVING DEVICE FOR BODY AND BONNET CAVITY SHALL BE PROVIDED FOR RELIEVING CAVITY PRESSURE IN UPSTREAM SIDE. UPSTREAM SIDE WILL BE STAMPED WITH THE WORD "VENT" ON FLANGE OR BW END.
12 100 % VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
13 VENDOR SHALL CERTIFY SUITABILITY OF THE VALVE FOR INTENDED SERVICE CONDITIONS.
14 BIDDER TO FURNISH POST ORDER SOFT SEAT DETAILS AND TYPE, GRADE & CLASS SELECTED WITH MANUFACTURER'S RECOMMENDATIONS LIKE PRESSURE-TEMPERATURE RATING CURVE/TABLE. STEM SEAL/BODY SEAL MATERIAL SHALL BE PROVIDED WITH CORROSION INHIBITOR
15 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
16 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
17 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
18 PUP PIECE/SPOOL PIECE END SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS: 2"-6" - SCH 40S, 8" TO 12" - SCH 80S. PUP PIECE/SPOOL PIECE END SHALL BE MACHINED TO SUIT GIVEN THICKNESS AFTER HYDROTESTING OF VALVE & PUP PIECE/SPOOL PIECE ASSEMBLY.
19 WELDED ENDS OF BALL VALVES SHALL BE PROVIDED WITH 100 MM LONG SPOOL PIECES WELDED ON AT VENDOR'S SHOP PRIOR TO ASSEMBLING OF SOFT SEATS (SPOOL PIECE MATERIAL: A312 GR.TP304 FOR VALVES UP TO SIZE 8" & ASTM A358 TP 304 CL.1 FOR SIZE 10" & ABOVE.).
20 FOR CRYO TESTING, ACCEPTABLE LEAKAGE RATES SHALL BE AS PER BS 6364.
21 ALL VALVES SHALL BE PROVIDED WITH ANTISTATIC DEVICES & POSITION INDICATORS.
22 FLUID HANDLED : LIQUIFIED NATURAL GAS, FUEL GAS (CRYOGENIC SERVICE)
23 FLOW DIRECTION SHALL BE CLEARLY MARKED ON ALL VALVES.
24 IN ADDITION TO ALL THE OTHER TESTING SPECIFIED, VALVE SHALL BE TESTED AS PER L.11 OF API-6D.
25 VALVE SHALL BE OF FULL PORT DESIGN.
26 ALL CRYOGENIC BALL VALVES (CAVITY RELIEF BALL VALVES) SHALL HAVE BIDIRECTIONAL SEALING (REFER NOTE-10 ALSO).
27 ALL VALVE SIZES SHALL BE OF TRUNNION MOUNTED DESIGN.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**545UL**

BALL VALVE SPECIFICATION

TAG NO. : **545UL** **RATING :** 600 **STANDARD :** BS EN ISO 17292

SIZE RANGE : 0.50 " TO 1.50 " **ENDS :** BW **TO** B-16.25,

PIPING CLASS : D22K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	FORGED/CAST	ASTM A 182 GR.F304/ASTM A 351 GR.CF8		
STEM	ANTI BLOWOUT	SS304/SS 316/XM-19 (NO CASTING)		
BALL	SOLID	SS304/SS 316		
BODY SEAT		PCTFE WITH SECONDARY METAL TO METAL		
GLAND	BOLTED/ RETAINED BY NUT & WASHER	SS 304/SS316		
STEM SEAL	RENEWABLE WITH VALVE OPEN ON STREAM	GRAFOIL (NOTE-14)		
BODY SEAL		GRAFOIL (NOTE-14)		
BODY STUD		ASTM A 320 GR.B8M CL.2 (IMPACT TESTED)		
BODY NUT		ASTM A 194 GR.8M (IMPACT TESTED)		
OTHERS		FULL PORT, TOP ENTRY, CAVITY RELIEF BALL VALVES, TRUNNION MOUNTED DESIGN		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO(NOTE-16)	MIN. TEMP -196 DEG. C./MAX. TEMP 65 DEG. C.		
SPRING		INCONEL X - 750		
HYDROSTATIC TEST PRESSURE	BODY : 2175 PSIG	SEAT : 1600 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**545UL**

4 VALVES CAN ALSO BE SUPPLIED IN ACCORDANCE WITH API-6D. FOR API-6D VALVES, MIN BODY WALL THICKNESS SHALL BE AS PER ASME B16.34.
5 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/BS EN ISO 28921-1 ALSO.
6 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/ GLAND AS PER BS 6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATIONS).
7 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/ ISO 10497) / API RP 6FA.
8 TESTING SHALL BE AS PER BS 6364/BS EN ISO 28921-1 & BS 12266(PART 1)/API 6D.
9 WELDED ENDS OF BALL VALVES SHALL BE PROVIDED WITH 100 MM LONG SPOOL PIECES WELDED ON AT VENDOR'S SHOP PRIOR TO ASSEMBLING OF SOFT SEATS (SPOOL PIECE MATERIAL: A312 GR.TP304).
10 VENDOR SHALL CERTIFY SUITABILITY OF THE VALVE FOR INTENDED SERVICE CONDITIONS.
11 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
12 FOR CRYO TESTING, ACCEPTABLE LEAKAGE RATES SHALL BE AS PER BS 6364.
13 ALL VALVES SHALL BE PROVIDED WITH ANTISTATIC DEVICES & POSITION INDICATORS.
14 BIDDER TO FURNISH SOFT SEAT DETAILS AND TYPE, GRADE & CLASS SELECTED WITH MANUFACTURER'S RECOMMENDATIONS LIKE PRESSURE-TEMPERATURE RATING CURVE/TABLE. STEM SEAL/BODY SEAL MATERIAL SHALL BE PROVIDED WITH CORROSION INHIBITOR
15 PUP PIECE/SPOOL PIECE END SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS: 0.5" TO .75"- SCH 80S & 1.0" TO 1.5"- SCH 40S. PUP PIECE/SPOOL PIECE END SHALL BE MACHINED TO SUIT GIVEN THICKNESS AFTER HYDROTESTING OF VALVE & PUP PIECE/SPOOL PIECE ASSEMBLY.
16 FLUID HANDLED : LIQUIFIED NATURAL GAS, NATURAL GAS, FLARE GAS, FUEL GAS (CRYOGENIC SERVICE)
17 ALL VALVES SHALL DOUBLE ISOLATION AND BLEED TYPE WITH TWO BUBBLE TIGHT SEATING SURFACES.
18 FLOW DIRECTION SHALL BE CLEARLY MARKED ON ALL VALVES.
19 PRESSURE RELIEVING DEVICE FOR BODY AND BONNET CAVITY SHALL BE PROVIDED FOR RELIEVING CAVITY PRESSURE IN UPSTREAM SIDE. UPSTREAM SIDE WILL BE STAMPED WITH THE WORD "VENT" ON FLANGE OR BW END.
20 IN ADDITION TO ALL THE OTHER TESTING SPECIFIED, VALVE SHALL BE TESTED AS PER L.11 OF API-6D.
21 VALVE SHALL BE OF FULL PORT DESIGN.
22 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
23 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
24 100 % VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
25 ALL CRYOGENIC BALL VALVES (CAVITY RELIEF BALL VALVES) SHALL HAVE BIDIRECTIONAL SEALING (REFER NOTE-17 ALSO).
26 ALL VALVE SIZES SHALL BE OF TRUNNION MOUNTED DESIGN.
27 FOR TRUNNION MOUNTED BALL, BODY SEAT SHALL BE SPRING LOADED.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**546EQ**

BALL VALVE SPECIFICATION

TAG NO. : 546EQ **RATING :** 900 **STANDARD :** API-6D

SIZE RANGE : 2.00 " TO 30.00 " **ENDS :** BW **TO** B-16.25,

PIPING CLASS : E44K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	CAST/FORGED	ASTM A 351 GR.CF8M/ASTM A 182 GR.F316		
STEM	ANTI BLOWOUT	SS 316 (NO CASTING)		
BALL	SOLID	SS 316		
BODY SEAT		PCTFE WITH SECONDARY METAL TO METAL		
GLAND		SS 316		
STEM SEAL	RENEWABLE WITH VALVE OPEN ON STREAM	GRAFOIL (NOTE-19)		
BODY SEAL		GRAFOIL (NOTE-19)		
BODY STUD		ASTM A 320 GR.B8M CL.2 (IMPACT TESTED)		
BODY NUT		ASTM A 194 GR.8M (IMPACT TESTED)		
OTHERS		FULL PORT, TOP ENTRY, CAVITY RELIEF BALL VALVE, TRUNNION MOUNTED DESIGN		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO (NOTE-20)	MIN. TEMP -196 DEG. C./MAX. TEMP 65 DEG. C		
SPRING		INCONEL X - 750		
HYDROSTATIC TEST PRESSURE	BODY : 3250 PSIG	SEAT : 2375 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**546EQ**

4 MINIMUM WALL THICKNESS SHALL BE AS PER ASME B16.34.
5 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/BS EN ISO 28921-1 ALSO.
6 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/ GLAND AS PER BS 6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATIONS).
7 TESTING SHALL BE AS PER BS 6364/BS EN ISO 28921-1 & API 598/API 6D.
8 FOR TRUNNION MOUNTED BALL, BODY SEAT SHALL BE SPRING LOADED.
9 FOR CRYO TESTING, ACCEPTABLE LEAKAGE RATES SHALL BE AS PER BS 6364.
10 100 % VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
11 VENDOR SHALL CERTIFY SUITABILITY OF THE VALVE FOR INTENDED SERVICE CONDITIONS.
12 WELDED ENDS OF BALL VALVES SHALL BE PROVIDED WITH 100 MM LONG SPOOL PIECES WELDED ON AT VENDOR'S SHOP PRIOR TO ASSEMBLING OF SOFT SEATS (SPOOL PIECE MATERIAL: A312 GR.TP304 FOR VALVES UP TO SIZE 8" & ASTM A358 TP 304 CL.1 FOR SIZE 10" & ABOVE.).
13 PUP PIECE/SPOOL PIECE END SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS : 2.0" TO 6.0"- SCH 80S, 8.0"-14MM, 10"-16MM, 12"-20MM, 14"-S100, 16"-24MM, 18"-26MM, 20"-28.6MM, 24"-34.9MM, 26"-38MM, 30"-42MM
14 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
15 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
16 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
17 ALL VALVES SHALL BE FIRE SAFE DESIGN. FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/ ISO 10497)/ API RP 6FA.
18 ALL VALVES SHALL BE PROVIDED WITH ANTISTATIC DEVICES & POSITION INDICATORS.
19 BIDDER TO FURNISH SOFT SEAT DETAILS AND TYPE, GRADE & CLASS SELECTED WITH MANUFACTURER'S RECOMMENDATIONS LIKE PRESSURE-TEMPERATURE RATING CURVE/ TABLE. STEM SEAL/BODY SEAL MATERIAL SHALL BE PROVIDED WITH CORROSION INHIBITOR
20 FLUID HANDLED : LIQUIFIED NATURAL GAS, NATURAL GAS (CRYOGENIC SERVICE).
21 ALL VALVES SHALL DOUBLE ISOLATION AND BLEED TYPE WITH TWO BUBBLE TIGHT SEATING SURFACES.
22 FLOW DIRECTION SHALL BE CLEARLY MARKED ON ALL VALVES.
23 PRESSURE RELIEVING DEVICE FOR BODY AND BONNET CAVITY SHALL BE PROVIDED FOR RELIEVING CAVITY PRESSURE IN UPSTREAM SIDE. UPSTREAM SIDE WILL BE STAMPED WITH THE WORD "VENT" ON FLANGE OR BW END.
24 IN ADDITION TO ALL THE OTHER TESTING SPECIFIED, VALVE SHALL BE TESTED AS PER L.11 OF API-6D.
25 FOR FIRE SAFETY, VALVE MANUFACTURER MUST INSTALL GRAFOIL PACKING RINGS SANDWICHED BETWEEN TWO WIPER RINGS.
26 VALVE SHALL BE OF FULL PORT DESIGN.
27 ALL CRYOGENIC BALL VALVES (CAVITY RELIEF BALL VALVES) SHALL HAVE BIDIRECTIONAL SEALING (REFER NOTE-21 ALSO).
28 PUP PIECE/SPOOL PIECE END SHALL BE MACHINED TO SUIT GIVEN THICKNESS AFTER HYDROTESTING OF VALVE & PUP PIECE/SPOOL PIECE ASSEMBLY (THIS NOTE SHALL BE READ IN CONTINUATION TO NOTE-13).
29 ALL VALVE SIZES SHALL BE OF TRUNNION MOUNTED DESIGN.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**546TN**

BALL VALVE SPECIFICATION

TAG NO. : **546TN** **RATING :** 900 **STANDARD :** API-6D

SIZE RANGE : 2.00 " TO 16.00 " **ENDS :** BW **TO** B-16.25,

PIPING CLASS : E22K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	CAST/FORGED	ASTM A 351 GR.CF8/ASTM A 182 GR.F304		
STEM	ANTI BLOWOUT	SS304/SS 316/XM-19 (NO CASTING)		
BALL	SOLID	SS304/SS 316		
BODY SEAT		PCTFE WITH SECONDARY METAL TO METAL		
GLAND	BOLTED/ RETAINED BY NUT & WASHER	SS 304/SS 316		
STEM SEAL	RENEWABLE WITH VALVE OPEN ON STREAM	GRAFOIL (NOTE-14)		
BODY SEAL		GRAFOIL (NOTE-14)		
BODY STUD		ASTM A 320 GR.B8M CL.2 (IMPACT TESTED)		
BODY NUT		ASTM A 194 GR.8M (IMPACT TESTED)		
OTHERS		FULL PORT, TOP ENTRY, CAVITY RELIEF BALL VALVE, TRUNNION MOUNTED DESIGN		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO(NOTE-22)	MIN. TEMP -196 DEG. C. & MAX. TEMP. 60 DEG. C		
SPRING		INCONEL X - 750		
HYDROSTATIC TEST PRESSURE	BODY : 3250 PSIG	SEAT : 2375 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**546TN**

4 VALVES CAN ALSO BE SUPPLIED IN ACCORDANCE WITH API-6D. FOR API-6D VALVES, MIN BODY WALL THICKNESS SHALL BE AS PER ASME B16.34.
5 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/BS EN ISO 28921-1 ALSO.
6 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/ GLAND AS PER BS 6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATIONS).
7 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/ ISO 10497)/ API RP 6FA.
8 TESTING SHALL BE AS PER BS 6364/BS EN ISO 28921-1 & BS 12266(PART 1)/API 6D.
9 FOR TRUNNION MOUNTED BALL, BODY SEAT SHALL BE SPRING LOADED.
10 ALL VALVES SHALL DOUBLE ISOLATION AND BLEED TYPE WITH TWO BUBBLE TIGHT SEATING SURFACES.
11 PRESSURE RELIEVING DEVICE FOR BODY AND BONNET CAVITY SHALL BE PROVIDED FOR RELIEVING CAVITY PRESSURE IN UPSTREAM SIDE. UPSTREAM SIDE WILL BE STAMPED WITH THE WORD "VENT" ON FLANGE OR BW END.
12 100 % VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
13 VENDOR SHALL CERTIFY SUITABILITY OF THE VALVE FOR INTENDED SERVICE CONDITIONS.
14 BIDDER TO FURNISH POST ORDER SOFT SEAT DETAILS AND TYPE, GRADE & CLASS SELECTED WITH MANUFACTURER'S RECOMMENDATIONS LIKE PRESSURE-TEMPERATURE RATING CURVE/TABLE. STEM SEAL/BODY SEAL MATERIAL SHALL BE PROVIDED WITH CORROSION INHIBITOR
15 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
16 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
17 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
18 PUP PIECE/SPOOL PIECE END SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS: 2.0" TO 3.0"-SCH 40S, 4.0"TO 8.0"-SCH 80S, 10.0" TO 16.0"-SCH. S80 (DIM. STAN. B36.10). PUP PIECE/SPOOL PIECE END SHALL BE MACHINED TO SUIT GIVEN THICKNESS AFTER HYDROTESTING OF VALVE & PUP PIECE ASSEMBLY.
19 WELDED ENDS OF BALL VALVES SHALL BE PROVIDED WITH 100 MM LONG SPOOL PIECES WELDED ON AT VENDOR'S SHOP PRIOR TO ASSEMBLING OF SOFT SEATS (SPOOL PIECE MATERIAL: A312 GR.TP304 FOR VALVES UP TO SIZE 8" & ASTM A358 TP 304 CL.1 FOR SIZE 10" & ABOVE.).
20 FOR CRYO TESTING, ACCEPTABLE LEAKAGE RATES SHALL BE AS PER BS 6364.
21 ALL VALVES SHALL BE PROVIDED WITH ANTISTATIC DEVICES & POSITION INDICATORS.
22 FLUID HANDLED : LIQUIFIED NATURAL GAS, NATURAL GAS, FLARE GAS, FUEL GAS (CRYOGENIC SERVICE)
23 FLOW DIRECTION SHALL BE CLEARLY MARKED ON ALL VALVES.
24 IN ADDITION TO ALL THE OTHER TESTING SPECIFIED, VALVE SHALL BE TESTED AS PER L.11 OF API-6D.
25 VALVE SHALL BE OF FULL PORT DESIGN.
26 ALL CRYOGENIC BALL VALVES (CAVITY RELIEF BALL VALVES) SHALL HAVE BIDIRECTIONAL SEALING (REFER NOTE-10 ALSO).
27 ALL VALVE SIZES SHALL BE OF TRUNNION MOUNTED DESIGN.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**546UL**

BALL VALVE SPECIFICATION

TAG NO. : **546UL** **RATING :** 1500 **STANDARD :** API-6D

SIZE RANGE : 0.50 " TO 1.50 " **ENDS :** BW **TO** B-16.25,

PIPING CLASS : E22K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	FORGED/CAST	ASTM A 182 GR.F304/ASTM A 351 GR.CF8		
STEM	ANTI BLOWOUT	SS304/SS 316/XM19 (NO CASTING)		
BALL	SOLID	SS304/SS 316		
BODY SEAT		PCTFE WITH SECONDARY METAL TO METAL		
GLAND		SS 304/SS316		
STEM SEAL	RENEWABLE WITH VALVE OPEN ON STREAM	GRAFOIL (NOTE-17)		
BODY SEAL		GRAFOIL (NOTE-17)		
BODY STUD		ASTM A 320 GR.B8M CL.2 (IMPACT TESTED)		
BODY NUT		ASTM A 194 GR.8M (IMPACT TESTED)		
OTHERS		FULL PORT, TOP ENTRY, CAVITY RELIEF BALL VALVE, TRUNNION MOUNTED DESIGN		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO(NOTE-16)	MIN. TEMP -196 DEG. C./MIN. TEMP 60 DEG. C.		
SPRING		INCONEL X - 750		
HYDROSTATIC TEST PRESSURE	BODY : 5400 PSIG	SEAT : 3975 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**546UL**

4 MINIMUM WALL THICKNESS SHALL BE AS PER ASME B16.34.
5 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364 /BS EN ISO 28921-1 ALSO.
6 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/ GLAND AS PER BS 6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATIONS).
7 TESTING SHALL BE AS PER BS 6364/BS EN ISO 28921-1 & API 598/API 6D.
8 FOR TRUNNION MOUNTED BALL, BODY SEAT SHALL BE SPRING LOADED.
9 FOR CRYO TESTING, ACCEPTABLE LEAKAGE RATES SHALL BE AS PER BS 6364.
10 WELDED ENDS OF BALL VALVES SHALL BE PROVIDED WITH 100 MM LONG PIPE SPOOL PIECES WELDED ON AT VENDOR'S SHOP PRIOR TO ASSEMBLING OF SOFT SEATS (SPOOL PIECE MATERIAL: A312 GR.TP304)
11 PUP PIECE/SPOOL PIECE END SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS : 0.5" TO 0.75" - SCH 80S & 1.0" TO 1.5" - SCH 40S. PUP PIECE/SPOOL PIECE END SHALL BE MACHINED TO SUIT GIVEN THICKNESS AFTER HYDROTESTING OF VALVE & PUP PIECE/SPOOL PIECE ASSEMBLY.
12 VENDOR SHALL CERTIFY SUITABILITY OF THE VALVE FOR INTENDED SERVICE CONDITIONS.
13 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
14 ALL VALVES SHALL BE FIRE SAFE DESIGN. FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/ ISO 10497)/ API RP 6FA.
15 ALL VALVES SHALL BE PROVIDED WITH ANTISTATIC DEVICES & POSITION INDICATORS.
16 FLUID HANDLED: LIQUID NATURAL GAS, NATURAL GAS (CRYOGENIC SERVICE)
17 BIDDER TO FURNISH SOFT SEAT DETAILS AND TYPE, GRADE & CLASS SELECTED WITH MANUFACTURER'S RECOMMENDATIONS LIKE PRESSURE-TEMPERATURE RATING CURVE/ TABLE.STEAM SEAL/BODY SEAL MATERIAL SHALL BE PROVIDED WITH CORROSION INHIBITOR
18 ALL VALVES SHALL DOUBLE ISOLATION AND BLEED TYPE WITH TWO BUBBLE TIGHT SEATING SURFACES.
19 FLOW DIRECTION SHALL BE CLEARLY MARKED ON ALL VALVES.
20 PRESSURE RELIEVING DEVICE FOR BODY AND BONNET CAVITY SHALL BE PROVIDED FOR RELIEVING CAVITY PRESSURE IN UPSTREAM SIDE. UPSTREAM SIDE WILL BE STAMPED WITH THE WORD "VENT" ON FLANGE OR BW END.
21 IN ADDITION TO ALL THE OTHER TESTING SPECIFIED, VALVE SHALL BE TESTED AS PER L.11 OF API-6D.
22 VALVE SHALL BE OF FULL PORT DESIGN.
23 ALL CRYOGENIC BALL VALVES (CAVITY RELIEF BALL VALVES) SHALL HAVE BIDIRECTIONAL SEALING (REFER NOTE-18 ALSO).
24 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
25 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
26 100 % VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
27 ALL VALVE SIZES SHALL BE OF TRUNNION MOUNTED DESIGN.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**563AD**

BUTTERFLY VALVE SPECIFICATION

TAG NO. : **563AD** **RATING :** 150 **STANDARD :** BS EN 593

SIZE RANGE : 26.00 " TO 36.00 " **ENDS :** FLG D **TO** B-16.47 B,RF/125AARH

PIPING CLASS : A40A

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	CAST	ASTM A 352 GR.LCB		
DISC	CAST, TRIPLE OFFSET	ASTM A 352 GR.LCB/ASTM A 351 GR.CF8M/ A 351 GR.CF8		
SHAFT	ANTI STATIC.	17-4PH/A 479 XM19/SS316/SS304(NO CASTING)		
DISK SEAL		LAMINATED STAINLESS STEEL SEAL RING/ LAMINATED DUPLEX AND GRAPHITE DISC SEAL RING.		
SHAFT BUSHING		SS304/SS316		
BODY SCREWS/PIN		SS304/SS316		
BODY SEATS		HARDFACED TO MNF'S STANDARD (NOTE-25)		
SHAFT SEAL		SS316+GRAFOIL/GRAFOIL		
CLAMPING RINGS(IF REQD.)		ASTM A 516 GR.70/SS316/SS304		
GASKET		SP.WND SS316+GRAFOIL FILLER		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	LT	MIN TEMP (-)45 DEG.C., MAX TEMP 120 DEG.C		
THRUST BEARING		SS316		
OTHERS	METAL TO METAL			
HYDROSTATIC TEST PRESSURE	BODY : 400 PSIG	SEAT : 300 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**563AD**

4 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/ BS EN ISO 28921-1 ALSO.
5 VALVES SHALL BE PROVIDED WITH EXTENDED BONNET AS PER BS 6364/ BS EN ISO 28921-1.
6 VALVE CAN ALSO BE SUPPLIED ALSO BE SUPPLIED AS PER API 609, CATEGORY-B.
7 VALVE TESTING SHALL BE AS PER BS 6364/ BS EN ISO 28921-1 AND BS BS EN 12266-1/ API-598.
8 VALVES SHALL BE HIGH PERFORMANCE TYPE, TIGHT SHUT-OFF AND BI-DIRECTIONAL.
9 VALVES SHALL BE DOUBLE FLANGED TYPE TO ASME B16.47B, RF/125AARH.
10 FACE-TO FACE DIMENSIONS SHALL BE AS PER BS EN 558 (SERIES 13) FOR BS EN 593 VALVES AND AS PER CATEGORY-B VALVES (SHORT PATTERN) FOR API-609 VALVES.
11 VALVES SHALL BE SUITABLE FOR BOTH 'ON-OFF' AS WELL AS 'THROTTLING SERVICE' UNDER MAXIMUM DIFFERENTIAL PRESSURE FOR THE RATING.
12 DISC STRENGTH TEST SHALL BE CONDUCTED. PROCEDURE SHALL BE AS PER CODE.
13 100% VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
14 BOLTINGS FOR TAPPED HOLES IN BODY, IF ANY, SHALL BE SUPPLIED BY VENDOR IN MATERIAL ASTM A 320 GR.L7/A 194 GR.7
15 VALVES SHALL BE PROVIDED WITH POSITION INDICATOR AND LOCKING DEVICE AT ANY POSITION.
16 CROSS-SECTIONAL DETAIL OF BODY SEAT/SEAL ARRANGEMENT SHALL BE SUBMITTED POST ORDER DURING DRAWING APPROVAL.
17 VENDOR SHALL SUBMIT VALVE DRAWING FOR APPROVAL POST ORDER.
18 VALVE SHALL BE CERTIFIED SUITABLE FOR THE SERVICE AND SERVICE CONDITIONS SPECIFIED IN THE DATA SHEET FOR BUTTERFLY VALVES (FORMAT NO. 3-1643-0092).
19 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION /(API 607/ISO 10497)/API RP 6FA, AS APPLICABLE.
20 SHAFT SEAL MATERIAL(GRAFOIL) SHALL BE PROVIDED WITH CORROSION INHIBITOR.
21 VALVE TESTING SHALL BE AS PER API 598 (ZERO SEAT LEAKAGE)/ BS EN 12266-1 (LEAKAGE RATE-A).
22 UNLESS OTHERWISE REQUIRED FOR LINE CONDITIONS AS SPECIFIED IN THE DATASHEET, FLOW VELOCITY TO BE CONSIDERED FOR DESIGN SHALL BE 5 M/S FOR LIQUID SERVICE AND 40 M/S FOR GAS SERVICE.
23 VALVE SHALL BE VELAN TORQSEAL P-0 B A 02-A A A A OR EQUAL.
24 VALVES ARE LOCATED IN THE LINE FROM DEPROPANIZER CONDENSER TO PROPANE CHILLER HOT SIDE AND ARE AT A MINIMUM DISTANCE FROM THE PROPANE CHILLER. IN CASE OF VENDOR RECOMMENDATION FOR MIN. UPSTREAM/ DOWNSTREAM STREIGHT LENGTH, SAME TO BE PROVIDED BY VENDOR DURING DRAWING APPROVAL STAGE.
25 VENDOR CAN ALTERNATIVELY RECOMMEND USING BS EN 593/API 609 (PART-B) GUIDANCE FOR THE SELECTION OF VALVE TRIM MATERIAL. THE SAME SHALL BE REVIEWED BY EIL/OWNER AND EIL/OWNER DECISION SHALL BE FINAL IN THIS REGARD.

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**563TP**

BUTTERFLY VALVE SPECIFICATION

TAG NO. : **563TP** **RATING :** 150 **STANDARD :** BS EN 593

SIZE RANGE : 54.00 " TO 54.00 " **ENDS :** BW **TO** B-16.25,

PIPING CLASS : A22K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	CAST	ASTM A 351 GR.CF8		
DISC	CAST, TRIPLE OFFSET	ASTM A 351 GR.CF8		
SHAFT	ANTI STATIC	A 479 XM19/ SS 304/ SS 316 (NO CASTING)		
DISK SEAL		UNS S31803(DUPLEX) +GRAPHITE/SS316+GRAPHITE		
SHAFT BUSHING		SS304/SS 316		
BODY SCREWS/PIN		SS316/SS 304		
BODY SEATS	RESILIENT	STELLITED/ MNF'S STD. (NOTE-25)		
SHAFT SEAL		SS316+GRAFOIL/GRAFOIL		
CLAMPING RINGS(IF REQD.)		SS304/ SS316		
GASKET		SP.WND SS316+GRAFOIL FILLER		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO	MIN TEMP -196 DEG.C. & MAX TEMP. 120 DEG.C.		
OTHERS	TOP ENTRY (NOTE-22), METAL TO METAL SEATED			
THRUST BEARING		SS316		
HYDROSTATIC TEST PRESSURE	BODY : 425 PSIG	SEAT : 325 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**563TP**

4 VALVE CAN ALSO BE SUPPLIED IN ACCORDANCE WITH API 609, CATEGORY-B.
5 VALVE TESTING SHALL BE AS PER API 598 , BS EN 12266-1 AND BS-6364/BS EN ISO 28921-1.
6 VALVES SHALL BE HIGH PERFORMANCE TYPE, TIGHT SHUT-OFF AND BI-DIRECTIONAL.
7 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364 /BS EN ISO 28921-1ALSO.
8 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/GLAND AS PER BS-6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATION).
9 VALVES SHALL BE SUITABLE FOR BOTH 'ON-OFF' AS WELL AS 'THROTTLING SERVICE' UNDER MAXIMUM DIFFERENTIAL PRESSURE FOR THE RATING.
10 DISC STRENGTH TEST SHALL BE CONDUCTED AS PER CODE.
11 100% VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
12 BOLTINGS FOR TAPPED HOLES IN BODY, IF ANY, SHALL BE SUPPLIED BY VENDOR IN MATERIAL ASTM A 320 GR.B8(IMPACT TESTED)/A 194 GR.8 (IMPACT TESTED)
13 VALVES SHALL BE PROVIDED WITH POSITION INDICATOR AND LOCKING DEVICE AT ANY POSITION.
14 CROSS-SECTIONAL DETAIL OF BODY SEAT/SEAL ARRANGEMENT SHALL BE SUBMITTED POST ORDER.
15 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
16 VALVE SHALL BE CERTIFIED SUITABLE FOR THE SERVICE AND SERVICE CONDITIONS SPECIFIED IN THE DATA SHEET FOR BUTTERFLY VALVES.
17 VALVE ENDS SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS : 54" - 14.0 MM
18 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/BS EN ISO 10497) /API RP 6FA, AS APPLICABLE.
19 SHAFT SEAL MATERIAL(GRAFOIL) SHALL BE PROVIDED WITH CORROSION INHIBITOR.
20 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
21 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
22 VALVE SHALL BE OF TOP ENTRY DESIGN.
23 END TO END DIMENSIONS FOR THIS BUT WELDED BUTTERFLY VALVE SHALL BE AS PER BS EN 12892 (SERIES 14) FOR BS EN 593 VALVES. IF THE SAME IS NOT PRESENT IN THIS CODE, END TO END DIMENSION SHALL BE FINALIZED BY VENDOR. SAME SHALL BE PROVIDED BY VENDOR WITH BID ITSELF.
24 UNLESS OTHERWISE REQUIRED FOR LINE CONDITIONS AS SPECIFIED IN THE DATASHEET, FLOW VELOCITY TO BE CONSIDERED FOR DESIGN SHALL BE 5 M/S FOR LIQUID SERVICE AND 40 M/S FOR GAS SERVICE.
25 VENDOR CAN ALTERNATIVELY RECOMMEND USING BS EN 593/API 609 (PART-B) GUIDANCE FOR THE SELECTION OF VALVE TRIM MATERIAL. THE SAME SHALL BE REVIEWED BY EIL/OWNER AND EIL/OWNER DECISION SHALL BE FINAL IN THIS REGARD.

Template No. 5-0000-0001-T2 Rev.1

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**564AN**

BUTTERFLY VALVE SPECIFICATION

TAG NO. : **564AN** **RATING :** 300 **STANDARD :** BS EN 593

SIZE RANGE : 26.00 " TO 32.00 " **ENDS :** FLG D **TO** B-16.47 B,RF/125AARH

PIPING CLASS : B54K

MANUF'S OFFER

STANDARD :

MFGRS CAT/FIG :
(For category -II MRs only)

RATING : **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	CAST	ASTM A 351 GR CF8M		
DISC	CAST, TRIPLE OFFSET	ASTM A 351 GR CF8M		
SHAFT	ANTI STATIC.	A 479 XM19/SS316(NO CASTING)		
DISK SEAL		LAMINATED STANLESS STEEL SEAL RING/ LAMINATED DUPLEX AND GRAPHITE DISC SEAL RING.		
SHAFT BUSHING		SS316		
BODY SCREWS/PIN		SS316		
BODY SEATS		HARDFACED TO MNF'S STANDARD (NOTE-29)		
SHAFT SEAL		SS316+GRAFOIL/GRAFOIL		
CLAMPING RINGS(IF REQD.)		SS316		
GASKET		SP.WND SS316+GRAFOIL FILLER		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	LT/CRYO+H2	MIN TEMP (-)196 DEG.C. AND MAX TEMP 120 DEG.C.		
THRUST BEARING		SS316		
OTHERS	METAL TO METAL			
HYDROSTATIC TEST PRESSURE	BODY : 1100 PSIG	SEAT : 800 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**564AN**

4 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/ BS EN ISO 28921-1 ALSO.
5 VALVES SHALL BE PROVIDED WITH EXTENDED BONNET AS PER BS 6364/ BS EN ISO 28921-1.
6 VALVE CAN ALSO BE SUPPLIED ALSO BE SUPPLIED AS PER API 609, CATEGORY-B.
7 VALVE TESTING SHALL BE AS PER BS 6364/ BS EN ISO 28921-1 AND BS BS EN 12266-1/ API-598.
8 VALVES SHALL BE HIGH PERFORMANCE TYPE, TIGHT SHUT-OFF AND BI-DIRECTIONAL.
9 VALVES SHALL BE DOUBLE FLANGED TYPE TO ASME B16.47B, RF/125AARH.
10 FACE-TO FACE DIMENSIONS SHALL BE AS PER BS EN 558 (SERIES 14) FOR BS EN 593 VALVES AND AS PER CATEGORY-B VALVES (DOUBLE FLANGED, SHORT PATTERN, CLASS 300b) FOR API-609 VALVES.
11 VALVES SHALL BE SUITABLE FOR BOTH 'ON-OFF' AS WELL AS 'THROTTLING SERVICE' UNDER MAXIMUM DIFFERENTIAL PRESSURE FOR THE RATING.
12 DISC STRENGTH TEST SHALL BE CONDUCTED. PROCEDURE SHALL BE AS PER CODE.
13 100% VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
14 BOLTINGS FOR TAPPED HOLES IN BODY, IF ANY, SHALL BE SUPPLIED BY VENDOR IN MATERIAL ASTM A320 GR B8 CL 2 (IMPACT TESTED)/ASTM A194 GR 8 (IMPACT TESTED)
15 VALVES SHALL BE PROVIDED WITH POSITION INDICATOR AND LOCKING DEVICE AT ANY POSITION.
16 CROSS-SECTIONAL DETAIL OF BODY SEAT/SEAL ARRANGEMENT SHALL BE SUBMITTED POST ORDER DURING DRAWING APPROVAL.
17 VENDOR SHALL SUBMIT VALVE DRAWING FOR APPROVAL POST ORDER.
18 VALVE SHALL BE CERTIFIED SUITABLE FOR THE SERVICE AND SERVICE CONDITIONS SPECIFIED IN THE DATA SHEET FOR BUTTERFLY VALVES (FORMAT NO. 3-1643-0092).
19 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION /(API 607/ISO 10497)/API RP 6FA, AS APPLICABLE.
20 SHAFT SEAL MATERIAL(GRAFOIL) SHALL BE PROVIDED WITH CORROSION INHIBITOR.
21 VALVE TESTING SHALL BE AS PER API 598 (ZERO SEAT LEAKAGE)/ BS EN 12266-1 (LEAKAGE RATE-A).
22 UNLESS OTHERWISE REQUIRED FOR LINE CONDITIONS AS SPECIFIED IN THE DATASHEET, FLOW VELOCITY TO BE CONSIDERED FOR DESIGN SHALL BE 5 M/S FOR LIQUID SERVICE AND 40 M/S FOR GAS SERVICE.
23 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
24 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
25 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
26 VALVES SHALL MEET THE REQUIREMENTS FOR HYDROGEN SERVICE AS SPECIFIED IN 'TECHNICAL NOTES FOR VALVES'.
27 VALVE SHALL BE VANESSA SERIES 30000 STAINLESS STEEL CRYOGENIC SERVICE SERIES B, TRIM C OR EQUAL.
28 IN CASE OF VENDOR RECOMMENDATION FOR MIN. UPSTREAM/ DOWNSTREAM STREIGHT LENGTH, SAME TO BE PROVIDED BY VENDOR DURING DRAWING APPROVAL STAGE.
29 VENDOR CAN ALTERNATIVELY RECOMMEND USING BS EN 593/API 609 (PART-B) GUIDANCE FOR THE SELECTION OF VALVE TRIM MATERIAL. THE SAME SHALL BE REVIEWED BY EIL/OWNER AND EIL/OWNER DECISION SHALL BE FINAL IN THIS REGARD.

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**566AE**

BUTTERFLY VALVE SPECIFICATION	**MANUF'S OFFER**
TAG NO. : **566AE** **RATING :** 900 **STANDARD :** BS EN 593 **SIZE RANGE :** 30.00 " TO 30.00 " **ENDS :** BW **TO** B-16.25, **PIPING CLASS :** E62A	**STANDARD :** **MFGRS CAT/FIG :** **(For category -II MRs only)** **RATING :** **ENDS :**

DESCRIPTION	CONSTRUCTION	MATERIAL	CONSTRUCTION	MATERIAL
BODY	CAST	ASTM A 216 GR.WCB		
DISC	CAST, TRIPLE OFFSET	ASTM A 216 GR.WCB/ASTM A105/ASTM A 351 GR.CF8M/ A 351 GR.CF8/13% CR.STEEL		
SHAFT	ANTI STATIC.	17-4PH/13% CR.STEEL/A 479 XM19/SS316/SS304(NO CASTING)		
DISK SEAL		LAMINATED STANLESS STEEL SEAL RING/ LAMINATED DUPLEX AND GRAPHITE DISC SEAL RING		
SHAFT BUSHING		SS304/SS316		
BODY SCREWS/PIN		SS304/SS316		
BODY SEATS		HARDFACED TO MNF'S STANDARD (NOTE-24)		
SHAFT SEAL		SS 316+GRAFOIL/GRAFOIL		
CLAMPING RINGS(IF REQD.)		ASTM A 515 GR.70/SS316/SS304/13% CR.STEEL		
GASKET		SP.WND SS316+GRAFOIL FILLER		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS		MAX TEMP 204 DEG.C., DESIGN PRESSURE: 134.5 KG/CM2G/FV		
THRUST BEARING		SS316		
OTHERS	METAL TO METAL			
HYDROSTATIC TEST PRESSURE	BODY : 3350 PSIG	SEAT : 2450 PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**566AE**

4 VALVE CAN ALSO BE SUPPLIED ALSO BE SUPPLIED AS PER API 609, CATEGORY-B.
5 VALVE TESTING SHALL BE AS PER BS EN 12266-1/ API 598.
6 VALVES SHALL BE HIGH PERFORMANCE TYPE, TIGHT SHUT-OFF AND BI-DIRECTIONAL.
7 VALVES SHALL BE BUTT WELDED TYPE CONFIRMING TO ASME B16.25 REQUIREMENT.
8 VALVES SHALL BE BUTT WELDED TYPE WITH FACE-TO-FACE DIMENSIONS AS PER BS EN 558 FOR BS EN 593 VALVES AND AS PER CATEGORY-B VALVES (SHORT PATTERN) FOR API-609 VALVES. IN THE CASE OF SIZES NOT SPECIFIED IN BS EN 558 / API-609, FACE-TO-FACE DIMENSIONS MAY BE AS PER MANUFACTURER'S STANDARD.
9 VALVES SHALL BE SUITABLE FOR BOTH 'ON-OFF' AS WELL AS 'THROTTLING SERVICE' UNDER MAXIMUM DIFFERENTIAL PRESSURE FOR THE RATING.
10 DISC STRENGTH TEST SHALL BE CONDUCTED. PROCEDURE SHALL BE AS PER CODE.
11 100% VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
12 BOLTINGS FOR TAPPED HOLES IN BODY, IF ANY, SHALL BE SUPPLIED BY VENDOR IN MATERIAL ASTM A 193 GR.B7/A 194 GR.2H
13 VALVES SHALL BE PROVIDED WITH POSITION INDICATOR AND LOCKING DEVICE AT ANY POSITION.
14 CROSS-SECTIONAL DETAIL OF BODY SEAT/SEAL ARRANGEMENT SHALL BE SUBMITTED POST ORDER DURING DRAWING APPROVAL..
15 VENDOR SHALL SUBMIT VALVE DRAWING FOR APPROVAL POST ORDER.
16 VALVE SHALL BE CERTIFIED SUITABLE FOR THE SERVICE AND SERVICE CONDITIONS SPECIFIED IN THE DATA SHEET FOR BUTTERFLY VALVES (FORMAT NO. 3-1643-0092).
17 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION /(API 607/ISO 10497)/API RP 6FA, AS APPLICABLE.
18 SHAFT SEAL MATERIAL(GRAFOIL) SHALL BE PROVIDED WITH CORROSION INHIBITOR.
19 VALVE TESTING SHALL BE AS PER API 598 (ZERO SEAT LEAKAGE)/ BS EN 12266-1 (LEAKAGE RATE-A).
20 UNLESS OTHERWISE REQUIRED FOR LINE CONDITIONS AS SPECIFIED IN THE DATASHEET, FLOW VELOCITY TO BE CONSIDERED FOR DESIGN SHALL BE 5 M/S FOR LIQUID SERVICE AND 40 M/S FOR GAS SERVICE.
21 VALVE ENDS SHALL MATCH THICKNESS OF CONNECTING PIPES WHICH IS AS FOLLOWS : 30"- 44 MM.
22 VALVE SHALL BE VANESSA SERIES 30000 SERIES B, TRIM E OR EQUAL
23 IN CASE OF VENDOR RECOMMENDATION FOR MIN. UPSTREAM/ DOWNSTREAM STREIGHT LENGTH, SAME TO BE PROVIDED BY VENDOR DURING DRAWING APPROVAL STAGE.
24 VENDOR CAN ALTERNATIVELY RECOMMEND USING BS EN 593/API 609 (PART-B) GUIDANCE FOR THE SELECTION OF VALVE TRIM MATERIAL. THE SAME SHALL BE REVIEWED BY EIL/OWNER AND EIL/OWNER DECISION SHALL BE FINAL IN THIS REGARD.
25 END TO END DIMENSIONS OF BUTTERFLY VALVES WHICH SHALL BE AS PER MANUFACTURER'S STANDARD (AS PER NOTE-8) MUST BE PROVIDED BY THE BIDDERS IN OFFER ITSELF.

Copyright EIL -All rights reserved

Client	: PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project	: PDH - PP PLANT		
Location	: DAHEJ, GUJARAT	**Tag No :**	**566EQ**

BUTTERFLY VALVE SPECIFICATION			**MANUF'S OFFER**	
TAG NO. : 566EQ **RATING :** 900 **STANDARD :** BS EN 593 **SIZE RANGE :** 30.00 " TO 30.00 " **ENDS :** BW **TO** B-16.25, **PIPING CLASS :** E44K			**STANDARD :** **MFGRS CAT/FIG :** **(For category -II MRs only)** **RATING :** **ENDS :**	
DESCRIPTION	**CONSTRUCTION**	**MATERIAL**	**CONSTRUCTION**	**MATERIAL**
BODY	CAST	ASTM A 351 GR.CF8M		
DISC	CAST, TRIPLE OFFSET	ASTM A 351 GR.CF8M		
SHAFT	ANTI STATIC	A 479 XM19/SS316 (NO CASTING)		
DISK SEAL		LAMINATED STANLESS STEEL SEAL RING/ LAMINATED DUPLEX AND GRAPHITE DISC SEAL RING.		
SHAFT BUSHING		SS316		
BODY SCREWS/PIN		SS316		
BODY SEATS		HARDFACED TO MNF'S STANDARD (NOTE-21)		
SHAFT SEAL		SS316+GRAFOIL/GRAFOIL FILLER		
CLAMPING RINGS(IF REQD.)		SS316		
GASKET		SP.WND SS316+GRAFOIL FILLER		
REQUIREMENT OF GEAR OPERATOR		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
REQUIREMENT OF RADIOGRAPHY		REFER TECHNICAL NOTES FOR PURCHASE OF VALVES.		
SPECIAL SERVICE CONDITIONS	CRYO (NOTE-15),	MIN TEMP -196 DEG.C. & MAX TEMP. 65 DEG.C.		
OTHERS	TOP ENTRY DESIGN (NOTE-28), METAL TO METAL SEATED			
THRUST BEARING		SS316		
HYDROSTATIC TEST PRESSURE	BODY : 3200 PSIG	SEAT : 2350PSIG		
TEST PRESSURE WITH AIR	80 PSIG			

NOTES

1 THIS VALVE SPEC SHEET SHALL BE READ IN CONJUNCTION WITH TECHNICAL NOTES FOR VALVES, 6-44-0052.
2 ONLY IN THE CASE OF CATEGORY - II MRs,BIDDER SHALL CLEARLY WRITE ALL/ ANY DEVIATION AGAINST EACH PART/ MATERIAL OF VALVE IN THE SPACE PROVIDED FOR AND WHEREVER BIDDER AGREES WITH EIL'S SPEC BIDDER SHALL INDICATE "AGREED".
3 NO CUTTING/ OVERWRITING BY BIDDER ON EIL'S SPEC IS ALLOWED.

Copyright EIL -All rights reserved

Client :	PETRONET LNG LIMITED	**Dept. / Sect :**	16/43
Project :	PDH - PP PLANT		
Location :	DAHEJ, GUJARAT	**Tag No :**	**566EQ**

4 VALVE CAN ALSO BE SUPPLIED IN ACCORDANCE WITH API 609, CATEGORY-B.
5 VALVE TESTING SHALL BE AS PER API 598 , BS EN 12266-1 AND BS-6364/BS EN ISO 28921-1.
6 VALVES SHALL BE HIGH PERFORMANCE TYPE, TIGHT SHUT-OFF AND BI-DIRECTIONAL.
7 VALVES TO COMPLY WITH DESIGN REQUIREMENTS OF BS-6364/BS EN ISO 28921-1 ALSO.
8 VALVE SHALL BE PROVIDED WITH EXTENDED BONNET/GLAND AS PER BS-6364/BS EN ISO 28921-1 (NON COLD BOX APPLICATION).
9 VALVES SHALL BE SUITABLE FOR BOTH 'ON-OFF' AS WELL AS 'THROTTLING SERVICE' UNDER MAXIMUM DIFFERENTIAL PRESSURE FOR THE RATING.
10 DISC STRENGTH TEST SHALL BE CONDUCTED AS PER CODE.
11 100% VALVE CASTINGS SHALL UNDERGO RADIOGRAPHIC EXAMINATION.
12 BOLTINGS FOR TAPPED HOLES IN BODY, IF ANY, SHALL BE SUPPLIED BY VENDOR IN MATERIAL ASTM A 320 GR.B8 CL.2(IMPACT TESTED)/A 194 GR.8 (IMPACT TESTED).
13 VALVES SHALL BE PROVIDED WITH POSITION INDICATOR AND LOCKING DEVICE AT ANY POSITION.
14 CROSS-SECTIONAL DETAIL OF BODY SEAT/SEAL ARRANGEMENT SHALL BE SUBMITTED POST ORDER.
15 FLUID HANDLED : LOW TEMPERATURE PROCESS WITHOUT HYDROGEN, NATURAL GAS.
16 VALVE SHALL BE CERTIFIED SUITABLE FOR THE SERVICE AND SERVICE CONDITIONS SPECIFIED IN THE DATA SHEET FOR BUTTERFLY VALVES.
17 VALVE ENDS SHALL MATCH THICKNESSES OF CONNECTING PIPES WHICH ARE AS FOLLOWS : 30"-42 MM
18 ALL VALVES SHALL BE FIRE SAFE DESIGN.FIRE SAFE TEST SHALL BE AS PER API 607 VI EDITION/ (API 607/BS EN ISO 10497) /API RP 6FA, AS APPLICABLE.
19 IN CASE OF VENDOR RECOMMENDATION FOR MIN. UPSTREAM/ DOWNSTREAM STREIGHT LENGTH, SAME TO BE PROVIDED BY VENDOR DURING DRAWING APPROVAL STAGE.
20 SHAFT SEAL MATERIAL(GRAFOIL) SHALL BE PROVIDED WITH CORROSION INHIBITOR.
21 VENDOR CAN ALTERNATIVELY RECOMMEND USING BS EN 593/API 609 (PART-B) GUIDANCE FOR THE SELECTION OF VALVE TRIM MATERIAL. THE SAME SHALL BE REVIEWED BY EIL/OWNER AND EIL/OWNER DECISION SHALL BE FINAL IN THIS REGARD.
22 REFER TECHNICAL NOTES FOR VALVES FOR IMPACT TESTING REQUIREMENTS.
23 ALL CASTINGS SHALL BE SOLUTION HEAT TREATED.
24 WELD REPAIRS, IF ANY, SHALL BE CARRIED OUT PRIOR TO SOLUTION HEAT TREATMENT.
25 VALVES SHALL BE BUTT WELDED TYPE CONFIRMING TO ASME B16.25 REQUIREMENT.
26 VALVES SHALL BE BUTT WELDED TYPE WITH END-TO-END DIMENSIONS AS PER BS EN 558 FOR BS EN 593 VALVES AND AS PER CATEGORY-B VALVES (SHORT PATTERN) FOR API-609 VALVES. IN THE CASE OF SIZES NOT SPECIFIED IN BS EN 558 / API-609, FACE-TO-FACE DIMENSIONS MAY BE AS PER MANUFACTURER'S STANDARD.
27 END TO END DIMENSIONS OF BUTTERFLY VALVES WHICH SHALL BE AS PER MANUFACTURER'S STANDARDARD (AS PER NOTE-26) MUST BE PROVIDED BY THE BIDDERS IN OFFER ITSELF.
28 VALVE SHALL BE OF TOP ENTRY DESIGN.
29 UNLESS OTHERWISE REQUIRED FOR LINE CONDITIONS AS SPECIFIED IN THE DATASHEET, FLOW VELOCITY TO BE CONSIDERED FOR DESIGN SHALL BE 5 M/S FOR LIQUID SERVICE AND 40 M/S FOR GAS SERVICE.
30 VALVE SHALL BE COOPER BF090RF-C-316/10-FACR OR EQUAL.

Copyright EIL -All rights reserved

वाल्वों के लिए तकनीकी टिप्पणियाँ

TECHNICAL NOTES FOR VALVES

Rev. No	Date	Purpose	Prepared by	Checked by	Standards Committee Convenor	Standards Bureau Chairman
					Approved by	
9	09.07.24	REVISED AND ISSUED AS STANDARD SPECIFICATION	PK	SH	GB	MN
8	15.02.23	REVISED AND ISSUED AS STANDARD SPECIFICATION	PK	SH	GB	SM
7	13.07.17	REVISED AND ISSUED AS STANDARD SPECIFICATION	PK	SH	MI	RN
6	04.08.10	REVISED AND ISSUED AS STANDARD SPECIFICATION	RN	ATD	SC	
5	04.07.08	REVISED AND ISSUED AS STANDARD SPECIFICATION	RN	SC	DM	VC
4	15.11.00	REVISED AND ISSUED AS STANDARD SPECIFICATION	RN	BRB	NS	MI

Copyright EIL – All rights reserved

Abbreviations:

AARH	:	Arithmetic Average Roughness Height
API	:	American Petroleum Institute
ASME	:	American Society of Mechanical Engineers
ASTM	:	American Society for Testing & Materials
BGO	:	Bevel Gear Operator
BHN	:	Brinnel Hardness Number
BIS	:	Bureau of Indian Standards
BS	:	British Standard
BVIS	:	Bureau Veritas Industrial Services
BW	:	Butt Weld
CAT	:	Category
CEIL	:	Certification Engineers International Limited
CS	:	Carbon Steel
DFT	:	Dry Film Thickness
DNV	:	Det Norske Veritas
DP	:	Dye-Penetrant
eDMS	:	Electronic Document Management System
IBR	:	Indian Boiler Regulations
IGC	:	Inter Granular Corrosion
IS	:	Indian Standard
ISO	:	International Organisation for Standardisation
LC	:	Lock Closed
LO	:	Lock Open
LT	:	Low Temperature
LTCS	:	Low Temperature Carbon Steel
MOV	:	Motor Operated Valve
MP	:	Magnetic Particle
MR	:	Material Requisition
NACE	:	National Association for Corrosion engineers
NDT	:	Non Destructive Testing
NPT	:	National Pipe Thread
PMI	:	Positive Material Identification
PO	:	Purchase Order
PR	:	Purchase Requisition
Ra	:	Roughness average
RFQ	:	Request for Quotation
SCRD	:	Screwed
SS	:	Stainless Steel
SW	:	Socket Weld
TUV	:	Technischer Überwachungsverein
WAFL	:	Lugged Wafer Type

Piping Standards Committee

Convenor: Mr. G. Balaji

Members:
Mr. Udayan Chakravarty
Mr. Rameshwar Prasad
Mr. K. Anjaneyulu (SMED)
Mr. Rajesh Chitara (SMMS)
Dr. Sudip Paul (Structural)
Mr. Harsh Vardhan (Projects)
Mr. P.K. Rai (Construction)

Copyright EIL – All rights reserved

CONTENTS

1.0	GENERAL	4
2.0	DOCUMENTATION	4
3.0	DESIGN AND CONSTRUCTION	5
4.0	OPERATION	11
5.0	INSPECTION AND TESTING	12
6.0	RADIOGRAPHY OF CAST VALVES	133
7.0	IBR CERTIFICATION	14
8.0	MARKING	144
9.0	DESPATCH	144
10.0	ATTACHMENTS	155
11.0	REFERENCES	155

Copyright EIL – All rights reserved

1.0 GENERAL

1.1 Vendor shall supply valves in accordance with the valve specification sheets along with auxiliaries, if any, such as gear operator, bypasses, drains, locking etc. wherever specified in the specification sheets, subject notes and other enclosures to the material requisition (MR).

1.2 Vendor shall quote in strict accordance with the valve data / specification sheets, subject technical notes and all other enclosures to the MR. For 'Cat-I valves', no deviations whatsoever shall be accepted. For Cat-II Valves, if exceptions/ deviations become absolutely must, the same shall be requested as explained in clause 2.3.6 giving reasons for seeking such exceptions/ deviations. In case Post order concessions/ deviations are unavoidable, the request must be made by BIDDER through online system of EIL eDMS in accordance with 6-78-0001.

1.3 All codes and standards for manufacture, testing, inspection etc. shall be of latest editions as on issue date of RFQ.

1.4 In case of any conflict amongst documents attached with the MR, the most stringent shall govern and Owner's/ EIL decision shall be final in this regard.

2.0 DOCUMENTATION

2.1 All document submissions to EIL shall be through EIL eDMS.

2.2 For 'Cat-I' valves, no documents shall be submitted with the offer.

2.3 For 'Cat-II' valves, vendor shall submit the following documents with the offer:

2.3.1 Manufacturer's complete descriptive and illustrative catalogue / literature.

2.3.2 Detailed dimensioned cross section drawing with parts / material lists, weight etc.

2.3.3 Drawings for valves with accessories like gear operator, hydraulic / pneumatic operator, motor, extension bonnet, extended stems with stands, bypass etc. giving major salient dimensions and weights.

2.3.4 One copy of the valve specification sheets signed as "Accepted" by the manufacturer. Deviations, if any shall be marked as applicable on the valve specification sheet.

2.3.5 If the valve is regretted or has no deviation, the manufacturer shall write clearly on valve specification sheets as "Regret" or "No Deviation".

2.3.6 If there is any deviation, the same shall be listed clausewise.

2.3.7 On failure to submit documents as specified in clauses 2.3.1 to 2.3.6 above, the offer is likely to be rejected.

2.4 The following documents shall be submitted through eDMS of EIL after placement of the order:

Copyright EIL – All rights reserved

2.4.1 For Cat-I valves of size 2" and above where end-to-end/ face-to-face dimensions are to manufacturers' standards, detailed dimensioned cross section drawing with parts, materials, weight, etc. shall be submitted for records/ information.

2.4.2 For 'Cat-II' valves, Vendor shall submit for review drawings mentioned in clauses 2.3.2 & 2.3.3 before start of manufacture. No other drawings shall be submitted for review unless otherwise mentioned in MR.

2.4.3 Test report shall be supplied for all mandatory tests as per the applicable code. Test reports shall also be furnished for any supplementary tests as specified in clauses 3.13, 3.14 & 3.15.

2.4.4 Material test certificates (physical properties, chemical composition & heat treatment report including Chart) of the pressure containing parts shall be furnished for the valves supplied. Material test certificates for the other parts shall also be furnished for verification during inspection.

2.5 In addition to submissions through EIL eDMS, Catalogues/Drawings shall be in submitted in hard copies (6 sets) and soft copies (2 CDs/DVDs) along with delivery for Purchaser's record for all categories/types of valves.

3.0 DESIGN AND CONSTRUCTION

3.1 Valve shall be designed, manufactured, tested, inspected and marked as per the manufacturing standards, design codes and standards indicated in the respective valve specification sheets. Any conflict between the requisition, enclosures, specification sheets and referred standards/ codes shall be brought to the notice of the purchaser for clarifications and resolution, before proceeding with the manufacture. The purchaser's decision shall be final and binding to the vendor. The drawings submitted for review shall not include any deviations except as communicated in writing in Deviation permits. The Drawings shall be reviewed only for design and construction features.

3.2 All flanged valves shall have flanges integral (except forged valves) with the valve body. Flange face finish shall be normally specified in the valve specification sheet as 125 AARH etc. The interpretation for range of face finish shall be as follows:

Stock Finish	:	1000 μ in AARH max.
125 AARH	:	Serrations with 125 to 250 μ in AARH
63 AARH	:	32 to 63 μ in AARH

3.3 For all weld end valves with bevel end as per ASME B16.25, the contour of bevel shall be as follows:

Material	Wall Thickness	Weld Contour
Carbon Steel (Except Low Temp. Carbon Steel)	Upto 22 mm	Figure 2 Type A
	> 22 mm	Figure 3 Type A
Alloy Steel, Stainless Steel & Low Temp. Carbon Steel	Upto 10 mm	Figure 4
	> 10 mm & Upto 25 mm	Figure 5 Type A
	> 25 mm	Figure 6 Type A

Copyright EIL – All rights reserved

Valve ends shall match thickness of the connecting pipe. Sloping of inside contour of valves shall be done wherever necessary to achieve this.

3.4 For flanged valves with ring joint flanges the hardness shall be as follows:

Flange Material	Min. Hardness of Groove (BHN)
Carbon Steel	140
1% Cr to 5% Cr, 9% Cr	150
9Cr-1Mo-V	190
Type 304, 316, 321, 347	160
Type 304L, 316L	150
Inconel UNS N06625	220
Incoloy UNS N08825	210
Duplex SS UNS S32205, UNS S31803	250

3.5 Following requirements for check valves shall be met over and above the valve specification sheet requirements:

3.5.1 Unless specified otherwise in the data sheet all check valves 3" & above (except in Class 900, Class 1500 & Class 2500 rating) shall have a drain boss at location "G" (Refer Fig.No.1 of ASME B16.34) where pocket is formed in valve body. A tapped drain hole with plug shall be provided as per ASME B16.34. Threads shall be as per ASME B1.20.1 (Taper) NPT.

3.5.2 For heavy check valves, provisions shall be available for lifting by way of lugs, eye bolts and other such standard devices.

3.6 If an overlay weld-deposit is used for the body seat ring seating surface, the corrosion resistance of the seat ring base material shall be at least equal to the corrosion resistance of the material of the shell.

3.7 Following valve bypass requirements shall be met:

3.7.1 By-pass requirement for Gate valves shall be as follows unless otherwise mentioned.

ASME 150 Class	On sizes 26" and above
ASME 300 Class	On sizes 16" and above
ASME 600 Class	On sizes 6" and above
ASME 900 Class	On sizes 4" and above
ASME 1500 Class	On sizes 4" and above
ASME 2500 Class	On sizes 3" and above

3.7.2 The by-pass piping arrangement shall be such that clearance between main valve body and by-pass assembly shall be the minimum possible for layout reasons. Vendor shall follow the sketch enclosed in Specification No. 6-44-0052-A1.

3.7.3 By-pass valve shall be a globe valve. The sizes shall be as under:

On main valve ≤ 4" : 1/2"

Copyright EIL – All rights reserved

On main valve 6" to 8" : 3/4"
On main valve 10"& above : 1"

By-pass piping shall be of same metallurgy as main valve. The by-pass piping, fittings and valve tag numbers shall be as specified in Specification No. 6-44-0052-A2. In case details of by-pass arrangement for any Valve tag number is missing, Vendor shall bring the same to notice of EIL and provide by-pass as per details specified. Bends are not acceptable in place of elbows except in the location specified in 6-44-0052-A1.

3.7.4 Vendor shall supply the by-pass valve duly tested and fitted to the main valve with proper supporting from the main valve body, as required. Valves with by-pass shall have the direction of flow marked on the bypass valve only. By-pass attachment to the main valve body shall not be screwed. All fillet welds for by-pass installation shall be 100% examined by DP/MP test and Butt-weld joints shall be 100% examined by radiography.

3.8 Valve body / bonnet shall be forged / cast as specified. Forgings are acceptable in place of casting but not vice-versa.

3.9 Stem shall be forged or machined from forged / rolled bar. No casting is permitted. However, integral stem of cast material is acceptable for Plug valves.

3.10 Stelliting / hardfacing by deposition, shall be minimum 1.6 mm.

3.11 Renewable seat rings shall be seal welded for valves of size 3" and above to prevent loosening in service.

3.12 For Low Temperature & Cryogenic valve requirements, refer Specification. No. 6-44-0052-A3 unless otherwise specified.

3.13 For Hydrogen service valve requirements, refer Specification. No. 6-44-0052-A4 unless otherwise specified.

3.14 Valves under 'NACE' category shall meet the requirements specified in MR-0103 unless otherwise specified.

3.15 For all austenitic stainless steel valves Inter Granular Corrosion (IGC) test shall be conducted as per the following:

3.15.1 ASTM A262 Practice 'B' with acceptance criteria of '60 mils/year (max.)' for all materials - forged, rolled, wrought and casting.

Or

ASTM A262 Practice 'E' with acceptance criteria of 'No cracks as observed from 20X magnification' for all materials other than castings. 'Microscopic structure to be observed from 250X magnification' in addition.

3.15.2 When specifically asked for in MR for high temperature application of some grades of austenitic stainless steel (eg. SS309, 310, 316, 316H etc.) ASTM A262 Practice 'C' with acceptance criteria of '15 mils/year (max.)' shall be conducted.

3.15.3 For the IGC test as described in Clauses 3.15.1 & 3.15.2, two sets of samples shall be drawn from each solution annealing lot. One set shall correspond to the highest Carbon content and the other to the highest pressure rating. When testing is conducted as per practice 'E', photograph of the microscopic structure shall be submitted for record.

Copyright EIL – All rights reserved

3.16 All types of 321 or 347 stainless steel valves shall be in a stabilised heat treated condition. Stabilising heat treatment shall be carried out subsequent to the normal solution annealing. Soaking temperature and holding time for stabilising heat treatment shall be 900°C and 4 hours respectively.

3.17 Spiral wound bonnet gaskets are to be provided with inner/outer ring except when encapsulated gaskets type body-bonnet joints are employed. Outer ring may be avoided in case of non-circular spiral wound gasket used in Class 150 valve provided the outermost layer of spiral touches the bolts ascertaining the centering.

3.18 All Stainless Steel Castings shall be solution heat treated.

3.19 Only normalized and tempered material shall be used in the following specifications:

Castings : A217 Gr.WC1, A217 Gr.WC4, A217 Gr.WC5, A217 Gr.WC6, A217 Gr.WC9, A217 Gr.C5, A217 Gr.C12

Forgings : A182 Gr.F11 Cl.2, A182 Gr.F12 Cl.2

3.20 Ball / Plug / Butterfly Valves

3.20.1 As a prequalification, fire safe test as per API 607 / API 6FA / BS EN ISO 10497 (Supersedes BS 6755 Part II) shall be carried out on soft seated ball, plug & butterfly valves and also on lubricated plug valves. The test shall be witnessed and certified by a third party inspection agency like Lloyds, BVIS, DNV, TUV or EIL/ CEIL unless otherwise specified. The vendor has to submit test certificate for the particular design of the valve offered, if fire safe design is required as per the Valve Material Specification sheet.

3.20.2 Each valve shall be supplied with a lever / wrench except for gear operated / motor operated valves.

3.20.3 Soft-seated ball, plug & butterfly valves shall be supplied with antistatic devices.

3.20.4 BW / SW end ball valves shall have a 100 mm long seamless pipe nipple welded to each end of the valve. Nipples are to be welded prior to assembling soft seats / seals. Specifications of the nipples shall be as indicated in the MR.

3.20.5 The ball of ball valve shall not protrude outside the end flanges of valve.

3.20.6 Ball valves shall be of floating ball/trunnion mounted type as per following:

Class 150	8" & below	Floating ball
	10" & above	Trunnion mounted
Class 300	4" & below	Floating ball
	6" & above	Trunnion mounted
Class 600 & above	1.5" & below	Floating ball
	2" & above	Trunnion mounted

3.20.7 Unless otherwise specified in the data sheets, bore of all reduced bore ball valves shall be limited to one size lower than the nominal bore.

Copyright EIL – All rights reserved

3.20.8 In case of ball valves, the ball shall have a cylindrical bore and shall be of solid construction except in the case of rising stem ball valves or where otherwise specified.

3.21 Motor Operated Valves:

3.21.1 The MOVs are to be installed in an open area and the actuators shall be suitable for all weather conditions. The testing of complete assemblies of MOVs along with the actuators shall be done by the supplier at his works.

3.21.2 Vendor shall be solely responsible for selection of suitable actuators & actuator control system. Vendor shall be single point responsible for the complete system (i.e. valves, actuators, actuators control system etc.).

3.21.3 Valve with motorized actuators shall be suitable for installation in horizontal/vertical lines.

3.21.4 All MOVs shall be provided with hand wheel for manual operation.

3.22 In case flange dimension standard / Butt weld end thickness have not been specified in Valve Material Specification attached with the MR, Vendor to obtain the same from EIL and supply strictly in line with specifications.

3.23 Yoke material shall be same as bonnet material where maximum temperature specified is more than 427°C.

3.24 Face to Face / End to End Dimensions of Valves:

The Face to Face dimensions for Flanged valves and End to End Dimensions for Butt Welded Valves shall be strictly as given below unless otherwise specified in the VMS sheet. Valves with Face-to-Face/End-to-End dimensions as per Manufacturers' Standards are acceptable only where not covered in the Dimension Standards listed below.

3.24.1 Gate Valves:

Type	Face-to-Face/End-to-End Dimension
Flanged End	Dimension 'A' for Solid Wedge & Double Disc Gate Valves as per ASME B16.10
Butt Welding End	Dimension 'B' for Short Pattern Gate Valves up to the sizes covered in ASME B16.10. For sizes not covered under Short Pattern, Dimension 'B' for Long Pattern Gate Valves as per ASME B16.10 shall be followed.

3.24.2 Globe Valves:

Type	Face-to-Face/End-to-End Dimension
Flanged End	Dimension 'A' for Globe Valves as per ASME B16.10
Butt Welding End	Dimension 'B' for Short Pattern Globe Valves up to the sizes covered in ASME B16.10. For sizes not covered under Short pattern, Dimension 'B' for Long Pattern Globe Valves as per ASME B16.10 shall be followed.

Copyright EIL – All rights reserved

3.24.3 Check Valves:

Type	Face-to-Face/End-to-End Dimension
Flanged End Swing Check	Dimension 'A' for Swing Check Valves as per ASME B16.10
Butt Welding End Swing Check	Dimension 'B' for Short Pattern Swing Check Valves up to the sizes covered in ASME B16.10. For sizes not covered under short pattern, Dimension 'B' for Long Pattern Swing Check Valves as per ASME B16.10 shall be followed.
Lugged/Double Flanged Dual Plate Check Valves	As per API 594

3.24.4 Ball Valves:

The face-to-face dimensions of all ball valves shall be same as those of gate valves of the corresponding ASME Class rating as given in Clause 3.24.1 (except 10" onwards in Class 150 where the face-to-face dimensions shall be as per ASME B16.10 long pattern).

3.24.5 Plug Valves:

Class Rating	Face-to-Face Dimension
Class 150	Short Pattern as per ASME B16.10 up to 12" Venturi Pattern as per ASME B16.10 for above 12"
Class 300 & 600	Short Pattern as per ASME B16.10 up to 4" Venturi Pattern as per ASME B16.10 for above 4"

3.24.6 Butterfly Valves:

The face to face dimensions for butterfly valves shall be as per BS EN 558/API 609. For Class 150 Butterfly valves, Series 13 shall be followed and for Class 300 Butterfly valves, Series 14 shall be followed, unless otherwise specified.

3.25 In addition to all types of BW/SW ball valves, any other type of soft seated BW / SW end valve shall have a 100 mm long seamless pipe nipple welded to each end of the valve. Nipples are to be welded prior to assembling soft seats / seals. Specifications of the nipples shall be as indicated in the MR.

3.26 All Butt welds shall be 100% radiographed and all socket welds shall be 100% DP/MP tested.

3.27 Fugitive Emission Requirements:

Unless otherwise mentioned in VMS sheet, all valves with stem packing shall comply with the fugitive emission requirements detailed below as a pre-qualification.

3.27.1 Gate valves as per API-600 and all Gate/Globe valves as per API-602 shall comply with fugitive emission requirements of API 624.

Gate valves of Class rating 900 & above, Gate valves of size 26" & above and Globe valves of size 2" & above or valves where API-624 is not applicable due to non-graphite stem packing material, shall comply with Fugitive emission requirement of ISO-15848-1.

Copyright EIL – All rights reserved

3.27.2 Quarter turn valves shall comply with Fugitive emission requirement of API 641.Quarter turn valves where API-641 is not applicable due to non-graphite stem packing material, shall comply with Fugitive emission requirement of ISO-15848-1.

3.27.3 As a prequalification, Fugitive emission type test as per Cl. 3.27.1 & 3.27.2 above shall have been carried out and the test shall have been witnessed and certified by a third party inspection agency like Lloyds, BVIS, DNV, TUV or EIL/ CEIL unless otherwise specified. The vendor has to submit test certificate covering the entire range of valves to be supplied.

Vendors who do not have Fugitive emission type test certificate covering the range of valves to be supplied, shall conduct the requisite test within 12 weeks from the date of purchase order or within contractual delivery date, whichever is earlier.

In case of non-conductance of Fugitive emission type test(s) within time frame specified above or failure in the test(s) conducted after receipt of order, the owner reserves the right to invoke any of the provisions of the purchase order including cancellation of the purchase order at the risk and cost of vendor.

3.28 Valves specified as LO (Lock open) and LC (Lock closed) shall be supplied with suitable arrangement for locking in open as well as in closed position. Lock is included in vendor's scope of supply.

3.29 For Lugged Wafer Type (WAFL) Butterfly Valves, lug shall be provided for each bolt.

3.30 For butterfly valves, where bolting for tapped hole in body is being supplied by Vendor and diameter of the bolting is more than or equal to 1", the bolting supplied shall be studs to ASME B18.2.1 with two nuts.

3.31 For Gate and Globe valves, the stem surface area in contact with the packing shall have a surface finish, Ra, of 0.80μm (32μin.) or smoother, unless otherwise specified.

4.0 OPERATION

4.1 Gear operation shall be provided as under as a minimum, unless otherwise specified:

Valve Type	Class	Size Requiring Gear-Operator
Gate Valve, Globe Valve & Diaphragm Valve	150 Class	12" and larger
	300 Class	12" and larger
	600 Class	10" and larger
	900 Class	6" and larger
	1500 Class	3" and larger
	2500 Class	3" and larger
Ball Valve / Plug Valve (Other than pressure balance plug valves)	150 Class	6" and larger
	300 Class	6" and larger
	600 Class	4" and larger
Ball Valve / Plug Valve (Other than pressure balance plug valves)	900 Class	3" and larger
	1500 Class	3" and larger
Butterfly Valve	150, 300 Class	6" and larger

Copyright EIL – All rights reserved

For sizes lower than these ranges, hand wheel / lever / wrench shall be provided. For pressure balance plug valves manufacturer's recommendation shall be acceptable provided the requirements specified in clause 4.6 are met.

4.2 Gear operator shall be provided, with position indicators for open / close positions and with limit stops. (Limit stops are not applicable for gate valves). Gear box shall be fully encased and weather proof.

4.3 Where gear operator is not called for as per Clause 4.1 but vendor recommends a gear operator, the same shall be highlighted.

4.4 Gear operator shall be so designed as to operate effectively with the differential pressure across the closed valve equal to the cold non-shock pressure rating.

4.5 Ball, plug and butterfly valves, shall have "Open" position indicators with limit stops.

4.6 Hand-wheel diameter shall not exceed 750mm and lever length shall not exceed 500mm on either side. Effort to operate shall not exceed 35 Kg at hand-wheel periphery. However, failing to meet the above requirements, vendor shall offer gear operated valve and quote as per clause 4.3.

5.0 INSPECTION AND TESTING

5.1 Every valve shall be subjected to all the mandatory tests and checks called in the respective codes / data sheet by EIL inspection or any third party as approved by the purchaser. For IBR valves refer clause 7.0.

5.2 Every valve, its components and auxiliaries must be subjected to all the mandatory tests and checks called for in the respective codes, data sheets etc. by the manufacturer.

5.3 Though the extent of inspection shall be as under, exact extent with hold points shall be decided by EIL regional inspection office and recorded in the form of inspection plan. In case of third party inspection, the inspection plan shall be approved by the purchaser.

Forged Valves:

1. Visual and dimensional inspection.
2. Review of material test certificates.
3. Any mandatory or supplementary test.
4. Hydrostatic test on 10% valves selected on random basis.
5. Strip check is required for 1% of total ordered quantity of Gate & Globe valves (min. 1 No.) for each Valve sheet no., however, strip check is not required for CS/ Brass/ Bronze material valves with 13% Cr/ Brass/ Bronze trims.
6. Type test certificate for Fugitive Emissions as per Cl. 3.27.3.
7. Positive Material Identification
8. Type test certificates for cryogenic & Fire safe test to be submitted.

Cast Steel Valves:

1. Visual inspection with acceptance standards as per MSS SP-55 and dimensional inspection.
2. Review of material test certificates.

Copyright EIL – All rights reserved

3. Review of radiographs and radiographic reports or any other NDT tests wherever applicable as per data sheet.
4. Any mandatory or supplementary test.
5. Hydrostatic test 100% for body, 10% other test.
6. Strip check is required for 1% of total ordered quantity of Gate & Globe valves (min. 1 No.) for each Valve sheet no., however, strip check is not required for CS/ Brass/ Bronze material valves with 13% Cr/ Brass/ Bronze trims.
7. Type test certificate for Fugitive Emissions as per Cl. 3.27.3.
8. Positive Material Identification
9. Type test certificates for cryogenic & Fire safe test to be submitted.

Samples for strip check shall be selected at random and shall generally be in the highest size in the lot.

5.4 In case of motor operated or actuator operated valves, functional / operational checks as per the requirements of the specifications shall be made on each valve.

6.0 RADIOGRAPHY OF CAST VALVES

6.1 Valve castings shall undergo radiographic examination as specified below.

Material	Rating	Size Range	Radiography
All	Class 150	24" and below	NIL**
		26" and above*	100%
	Class 300	16" and below	NIL**
		18" and above	100%
	Class 600& above	All sizes	100%

* No radiography is required for valves of size 26" and above in cooling water service.

**For sizes 24" & below in Class 150 and 16" & below in Class 300, radiography percentage if specifically mentioned in individual valve material spec sheet shall govern.

Radiography specified as random 10% or 20% etc. in the respective valve data sheet implies 10% or 20% etc. of number of valves ordered against each item number with a minimum of one valve against each item.

6.2 Radiography procedure, areas of casting to be radiographed shall be as per ASME B16.34 and acceptance criteria shall be as per ASME B16.34. However for areas of casting to be radiographed for types of valves not covered in ASME B16.34, vendor shall radiograph castings in line with ASME B16.34.

6.3 For random radiography wherever specified in individual data sheets, the sampling shall be per size of the quantity ordered for each foundry.

6.4 Radiography wherever specified in the data sheets or as per clause 6.1 shall be done by X-ray / γ-ray to get the required sensitivity.

Copyright EIL – All rights reserved

7.0 IBR CERTIFICATION

7.1 For valves described "IBR", valves shall be in accordance with the latest IBR (Indian Boiler Regulation) including the requirements specified in the specification.

7.2 For SW / BW end carbon steel valves under IBR, the chemical composition shall conform to the following:

Carbon (Max)	:	0.25%
Others (S, P, Mn)	:	As per IBR

7.3 Valves coming under the purview of "IBR" (Indian Boiler Regulations) shall each be individually accompanied by IBR certificate original in Form III-C duly approved by IBR authority / local authority empowered by the Central Boiler Board of India. Photocopy of original certificate duly attested by the local boiler inspector where the supplier is located is the minimum requirement for acceptance.

7.4 All "IBR" valves shall be painted red in body-bonnet / body-cover joint.

8.0 MARKING

8.1 Valve markings, symbols, abbreviations etc. shall be in accordance with MSS-SP-25 or the standard referred in specification sheet as applicable. Vendor's name, valve rating, material designation, nominal size, direction of flow (if any) etc. shall be integral on the body.

8.2 Each valve shall have a corrosion resistant tag giving size, valve tag / code no., securely attached to the valve body.

8.3 Paint or ink for marking shall not contain any harmful metal or metal salts such as zinc, lead or copper which cause corrosive attack on heating.

8.4 Carbon Steel / Alloy Steel valves shall be painted with one coat of inorganic zinc silicate (minimum DFT 65 to 75 microns).

9.0 DESPATCH

9.1 Valve shall be dry, clean and free from moisture, dirt and loose foreign materials of any kind.

9.2 Valves shall be protected from rust, corrosion and any mechanical damage during transportation, shipment and storage.

9.3 Rust preventive on machined surfaces to be welded shall be easily removable with a petroleum solvent or shall not be harmful to welding.

9.4 Each end of valve shall be protected with the following materials:

Flange Face	:	Wood or Plastic Cover
Bevelled End	:	Wood or Plastic Cover
SW & SCRD. End	:	Plastic Cap

9.5 End protectors of wood / plastic to be used on flange faces shall be attached by at least three bolts and shall not be smaller than the outside diameter of the flange. However, plastic caps for SW & SCRD end valves shall be press fit type.

Copyright EIL – All rights reserved

9.6 End protectors to be used on bevelled end shall be securely and tightly attached.

9.7 For special service valves additional requirement for despatch shall be as prescribed in data sheet.

10.0 ATTACHMENTS

6-44-0052-A1	:	Bypass Piping Arrangement
6-44-0052-A2	:	Specifications for Bypass Piping, Fittings and Valves
6-44-0052-A3	:	Special Requirements for Low Temperature and Cryogenic Valves
6-44-0052-A4	:	Special Requirements for Hydrogen Service Valves

11.0 REFERENCES

6-78-0001	:	Specification for Quality management system requirements from bidders
6-78-0003	:	Specification for documentation requirements from suppliers
6-81-0001	:	Specification for Positive Material Identification (PMI) at Supplier's Works
6-81-0004	:	Inspection and Test plan for Valves

Copyright EIL – All rights reserved

BYPASS PIPING ARRANGEMENT

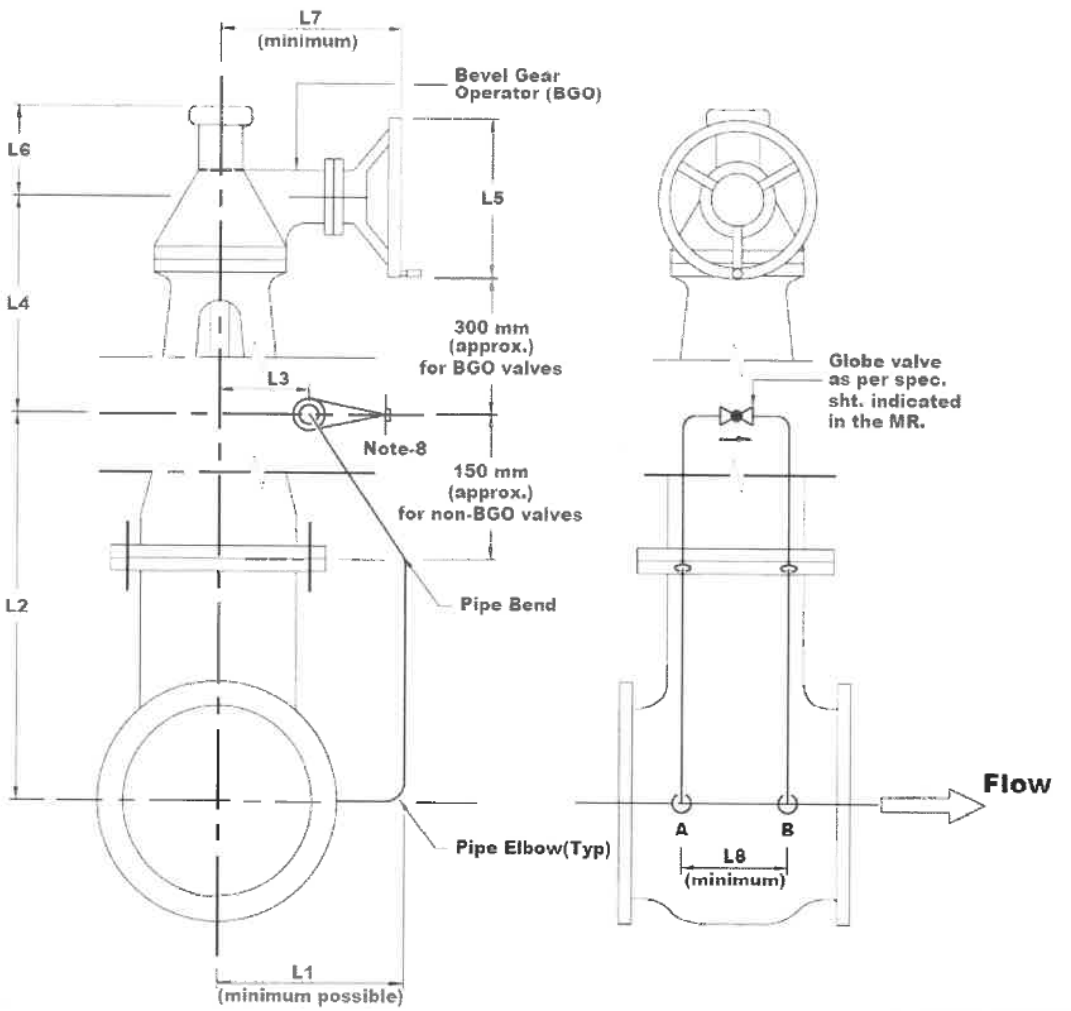

NOTES:

1. The orientation & location of handwheel of bevel gear operator & the bypass arrangement shall be strictly as per this sketch.
2. The bypass connection ends including connection to boss in main valve body shall be socket welded upto 600# and butt welded for 900# and above rating.
3. The bypass arrangement shall be properly clamped to & supported by the body of the main valve.
4. Basic design of bypass shall be to MSS-SP-45.
5. Material of bypass pipe & 90° elbows shall be same or equivalent to the body material as indicated in Specification No. 6-44-0052-A2.
6. This sketch is applicable for both BGO & NON-BGO Valves.
7. Vendor shall furnish dimensions L1 to L8.
8. Stem shall not be horizontal in the case of CRYO Valves.

Copyright EIL – All rights reserved

SPECIFICATIONS FOR BYPASS PIPING, FITTINGS AND VALVES

Class (Main Valve Sht.no.)	Pipe	Fittings	Bypass Valve Sht.no.	Remarks
A1A(51301), A3A(51321), A39A (51321), A9A(51301), A11A(51301), A33A(51301), B1A(51401), B9A(51401), D1A(51501), D9A (51501)	ASTM A106 Gr.B (SMLS) 0.5"-1.5": S160	ASTM A105 0.5"-1.5": SW 6000#	52001	
A6A(51301), B6A(51401)	ASTM A106 Gr.B (SMLS) 0.5"-0.5" : XXS 0.75"-1.5": S160	ASTM A105 0.5"-0.5" : SW 9000# 0.75"-1.5": SW 6000#	52001	
A13A(51301), B13A(51401)	ASTM A106 Gr.B (SMLS) 0.5"-1.5" : XXS	ASTM A105 0.5"-1.5" : SW 9000#	52001	
A2A(51302), B2A(51402), D2A (51502)	ASTM A106 Gr.B (SMLS)- IBR 0.5"-0.75": S160 1.0"-1.5" : XS	ASTM A105 - IBR 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52002	
A4A (51303), B4A (51403), D4A (51503)	ASTM A333 Gr.6 (SMLS)- LT 0.5"-0.75": S160 1.0"-1.5" : XS	ASTM A350Gr.LF2CL.1-LT 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52003	
B5A (51404), D5A (51504)	ASTM A106 Gr.B (SMLS) -H2 0.5"-0.75": S160 1.0"-1.5": XS	ASTM A105 - H2 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52004	Note-1
A7A (51307)	ASTM A106 Gr.B (SMLS) 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A105 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52007	
A16A (51311), B16A (51411), D16A (51511)	ASTM A106 Gr.B (SMLS) - NACE 0.5"-0.75" : XXS 1.0"-1.5": S160	ASTM A105 - NACE 0.5"-0.75" : SW 9000# 1.0"-1.5": SW 6000#	52011	Note-1
A19A (51313), B19A (51413), D19A (51513)	ASTM A106 Gr.B (SMLS) 0.5"-1.5" : S160	ASTM A105 0.5"-1.5": SW 6000#	52013	Note-1
E1A (51601), F1A (51701)	ASTM A106 Gr.B (SMLS) 0.5"-1.5" : S160	ASTM A234 Gr.WPB/ ASTM A105 0.5"-1.5" : BW, S160	52101	
E2A (51602), F2A (51702)	ASTM A106 Gr.B (SMLS) - IBR 0.5"-1.5" : S160	ASTM A234 Gr.WPB/ ASTM A105 - IBR 0.5"-1.5" : BW, S160	52102	
E5A (51604), F5A (51704)	ASTM A106 Gr.B (SMLS) - H2 0.5"-1.5" : S160	ASTM A234 Gr.WPB/ ASTM A105 - H2 0.5"-1.5" : BW, S160	52104	Note-1
E9A (51605), F9A (51705)	ASTM A106 Gr.B (SMLS) 0.5"-1.5" : SCH XXS	ASTM A234 Gr.WPB/ ASTM A105 0.5"-1.5" : BW, SCH XXS	52105	

Copyright EIL – All rights reserved

Class (Main Valve Sht.no.)	Pipe	Fittings	Bypass Valve Sht.no.	Remarks
E19A (51613), F19A (51713)	ASTM A106 Gr.B (SMLS) 0.5"-1.5" : SCH XXS	ASTM A234 Gr.WPB/ ASTM A105 0.5"-1.5" : BW, SCH XXS	52113	Note-1
A5Y (51384), A33Y (51384)	ASTM A106 Gr.B (SMLS) 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A105 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52085	
B1D (51430), D1D (51530)	ASTM A335Gr.P11(SMLS) 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A182 Gr.F11Cl.2 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52030	
D2D (51531)	ASTM A335Gr.P11 (SMLS) - IBR 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A182 Gr.F11Cl.2 - IBR 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52031	Note-1
B5D (51432), D5D (51532)	ASTM 335Gr.P11(SMLS)- H2 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A182 Gr.F11Cl.2 - H2 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52032	Note-1
B1E (51433)	ASTM A335Gr.P22(SMLS) 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A182 Gr.F22Cl.3 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52033	
D5E (51534)	ASTM A335Gr.P22(SMLS) - H2 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A182 Gr.F22Cl.3 - H2 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52034	Note-1
A4F (51336), B4F (51436)	ASTM A335 Gr.P5(SMLS) 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A182 Gr.F5 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52036	Note-1
B3F (51436)	ASTM A335 Gr.P5(SMLS) 0.5"-1.5" : XXS	ASTM A182 Gr.F5 0.5"-1.5" : SW 9000#	52036	Note-1
A4G (51339), B4G (51439)	ASTM A335 Gr.P9(SMLS) 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A182 Gr.F9 0.5"-0.75": SW 6000# 1.0"-1.5" : SW 3000#	52039	Note-1
F2D (51731)	ASTM A335 Gr.P11 (SMLS) - IBR 0.5"-1.5" : S160	ASTM A234Gr.WP11Cl.1/ A182 Gr.F11Cl.2 - IBR 0.5"-1.5" : BW, S160	52131	Note-1
F2G (517GG)	ASTM A335 Gr.P91 (SMLS) - IBR 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A234Gr.WP91/ A182 Gr.F91 - IBR 0.5"-0.75" : S160 1.0"-1.5": XS	52140	Note-1
G2G (518GG)	ASTM A335 Gr.P91 (SMLS) - IBR 0.5"-1.0" : S160 1.5"-1.5": XXS	ASTM A234Gr.WP91/ A182 Gr.F91 - IBR 0.5"-1.0" : S160 1.5"-1.5": XXS	52240	Note-1
E5E (51634)	ASTM A335 Gr.P22(SMLS) - H2 0.5"-0.75" : S160 1.0"-1.5": XS	ASTM A234Gr.WP22Cl.1/ A182 Gr.F22Cl.3 - H2 0.5"-0.75" : BW, S160 1.0"-1.5" : BW, XS	52134	Note-1

Copyright EIL – All rights reserved

Class (Main Valve Sht.no.)	Pipe	Fittings	Bypass Valve Sht.no.	Remarks
A1K (51345), A3K (51345), B1K (51445), D1K (51545)	ASTM A312TP304(SMLS) 0.5"-0.75" : 80S 1.0"-1.5": 40S	ASTM A182 Gr.F304 0.5"-1.5" : SW 3000#	52045	
A2K (51346), B2K (51446), D2K (51546)	ASTM A312TP304(SMLS) - CRYO 0.5"-0.75" : 80S 1.0"-1.5": 40S	ASTM A182 Gr.F304 - CRYO 0.5"-1.5" : SW 3000#	52046	
B4K (51448), B5K (51448)	ASTM A312TP304H(SMLS) 0.5"-1.5" : 80S	ASTM A182 Gr.F304H 0.5"-1.5": SW 3000#	52048	
A6K (51350), A11K (51350), B6K (51450)	ASTMA312TP304L(SMLS) 0.5"-0.75" : 80S 1.0"-1.5": 40S	ASTM A182 Gr.F304L 0.5"-1.5": SW 3000#	52050	
A1M (51361), B1M (51461)	ASTM A312 TP316(SMLS) 0.5"-0.75" : 80S 1.0"-1.5": 40S	ASTM A182 Gr.F316 0.5"-1.5": SW 3000#	52061	
B5M (51462)	ASTMA312TP316H(SMLS) - H2 0.5"-0.75" : 80S 1.0"-1.5": 40S	ASTM A182 Gr.F316H - H2 0.5"-1.5": SW 3000#	52062	
B3M (51463)	ASTM A312 TP321(SMLS) 0.5"-0.75" : 80S 1.0"-1.5": 40S	ASTM A182 Gr.F321 0.5"-1.5": SW 3000#	52063	
A1N (51366), B1N (51466)	ASTMA312TP316L(SMLS) 0.5"-0.75" : 80S 1.0"-1.5": 40S	ASTM A182 Gr.F316L 0.5"-1.5": SW 3000#	52066	
B6N (51471)	ASTM A312 TP316L (SMLS) 0.5"-0.75" : 80S 1.0"-1.5": 40S	ASTM A182 Gr.F316L 0.5"0.5"-1.5": SW 3000#	52071	

In case specifications for bypass of any specific VMS sheets are not available in the MR, Vendor to obtain the same from EIL and supply strictly in line with specifications.

Notes:

1. All welded joints shall be post weld heat treated. Procedure for Post weld heat treatment shall be in accordance with ASME B31.3.

Copyright EIL – All rights reserved

SPECIAL REQUIREMENTS FOR LOW TEMPERATURE & CRYOGENIC VALVES

1.0 SCOPE

All valves of Low Temperature Carbon Steel (LTCS) and all grades of austenitic SS (CRYO) material are categorized as cryogenic valves. All these valves shall have extended bonnet. The bonnet extension shall be as per VMS sheets (BS 6364/ BS EN ISO 28921-1) except check valves.

2.0 QUALIFICATION CRITERIA

For Limited Enquiries (Non NIT enquiries)

2.1 Vendors who satisfy both the requirements given below shall be considered qualified :

a. Vendor should be enlisted with EIL for any cryogenic valve irrespective of type, size, rating and metallurgy

b. Vendors should be enlisted with EIL for the same type, material, size and rating of non-cryogenic/cryogenic valve as the cryogenic valve quoted for

2.2 Qualified Vendors who do not have cryogenic test reports covering the range of Cryogenic valves quoted for, shall conduct cryogenic test per clauses 3.0 within 12 weeks from the date of purchase order.

2.3 Clauses 2.1 and 2.2 of this Annexure shall be read in conjunction.

3.0 CRYOGENIC TEST

3.1 Vendors to furnish copies of cryogenic test certificate for tests as per details given below:

3.1.1 Test shall be as per VMS sheets (BS 6364/ BS EN ISO 28921-2).

3.1.2 Test temperature, unless specifically called for otherwise in the individual MR, shall be -45°C for LTCS and -196°C for all grades of austenitic stainless steel.

3.1.3 Tests carried out on a particular size of one type of valve, pressure rating and material shall qualify all sizes equal to and below the test valve size for the same type, pressure rating and material. In case of austenitic SS any one grade would qualify for all other grades of austenitic SS.

3.1.4 Tests should have been witnessed and certified by any third party inspection agencies like M/s Lloyd, BV, DNV, TUV or EIL/ CEIL.

3.1.5 Test conducted previously and witnessed by inspection agencies listed above shall be considered acceptable and need not be repeated.

3.2 Post Order Testing Procedure

3.2.1. Before conducting post order testing, vendor shall obtain approval for the following from TPIA:

Copyright EIL – All rights reserved

a. Test procedure and Schematic of test rig with complete details as per standard specified in VMS sheet (BS 6364/ BS EN ISO 28921-2).

b. Cross-section drawing of the valve with material of construction.

3.2.2. Test has to be conducted irrespective of the service on largest size for each type of valve and for each material and class rating. Vendor shall offer one, two or three valves for selection of test valve by inspector depending upon whether quantity of largest valve in the order is one, two or three and more than three respectively.

In the event of failure of the test valve to meet the specification requirements, the vendor shall conduct test on two more valves. These two valves which pass test successfully, are of lower size, then the qualification will be valid only to sizes upto which test has been conducted successfully.

3.2.3. In case of non-conductance of cryogenic test(s) within 12 weeks or failure in the test(s) conducted after receipt of order, the owner reserves the right to invoke any of the provisions of the purchase order including cancellation of the purchase order at the risk and cost of vendor.

4.0 Bonnet extension, wherever specified in the valve sheet shall be for "non cold box application" unless otherwise specified in the MR. Even if not called for in VMS, valves indicated as "LT" or "CRYO" shall be supplied with bonnet extension.
If the valves are supplied in accordance with BS EN ISO 28921-1, Bonnet extension in LT service shall be as per values specified for -51 Deg.C to -109 Deg.C.

5.0 Bonnet and Gland extension joints shall be of butt welded/integrally cast construction.

6.0 Repair welding procedure for austenitic stainless steel valves in "CRYO" service shall have to be qualified for impact test as per ASME B31.3. Minimum acceptable impact energy shall be 20 J or lateral expansion of 0.38 mm at temperature of -196°C.

7.0 Wherever impact test of SS studs / nuts is called for in the data sheet, the impact value shall be 27 J at the intended service temperature specified in the data sheets.

Copyright EIL – All rights reserved

SPECIAL REQUIREMENTS FOR HYDROGEN SERVICE

1.0 GENERAL

1.1 These requirements are applicable for valves used in Hydrogen service. These are in addition to the requirements described in "Technical Notes for Valves" Spec. No. 6-44-0052, and shall be read in conjunction with this specification.

1.2 All cast valve flanges & bodies with flange rating of Class 900 or greater shall be examined in accordance with paragraphs 7.2 through 7.5 of Appendix-VII of ASME SEC-VIII, DIV.1, regardless of casting quality factor.

1.3 Body / bonnet / cover joints & stuffing box of all valves shall have low emission. One valve per metallurgy, per rating, per size shall be helium leak tested as per ASME Sec.V, Subsection A, Article 10 (Detector Probe Technique), Appendix IV at a minimum of 25% of the allowable (rated) cold working pressure. Selection of valves for helium leak test shall be at random. Test duration shall be as follows:

Test Duration in Minutes					
Nominal Size	Pressure Class				
	Upto 300	600	800 & 900	1500	2500
Upto 2"	3	6	9	12	12
3" to 6"	6	9	12	15	18
8" to 16"	9	9	12	15	18
18" to 24"	9	12	15	18	21

The valve shall show no leakage. No leakage is defined as a total leakage rate of less than 0.0001 ml/s of helium.

2.0 Only normalized and tempered material shall be used in the following specifications:

Castings : A217 Gr.WC1, A217 Gr.WC4, A217 Gr.WC5, A217 Gr.WC6, A217 Gr.WC9, A217 Gr.C5, A217 Gr.C12

Forgings : A182 Gr.F11 Cl.2

3.0 CS & AS VALVES

3.1 Bend test and Magnetic Particle inspection of the entire surface of body and bonnet casting shall be in accordance with ASTM A217. Supplementary requirement S3 & S4 evaluation of magnetic particle, inspection shall be in accordance with MSS-SP-53 except that no linear discontinuities shall be allowed.

3.2 The Brinell hardness of heat treated casting shall not exceed 200 BHN for carbon steel & 225 BHN for alloy steel.

3.3 Repair to defective casting shall be outlined in writing to the purchaser before repair starts. Repair method to be approved prior to welding.

3.4 Casting shall be preheated to a minimum of 400°F prior to welding and all Chromium-Molybdenum alloys shall be postweld heat treated after welding is complete. Stress relieving is essential for welds.

Copyright EIL – All rights reserved

3.5 Carbon steel shall be normalised and alloy steels shall be normalised & tempered.

3.6 Dye Penetrant test of welds shall be in accordance with ASTM B165 Procedure B-2. Interpretation as per Appendix-8 of ASME-VIII Div.1.

3.7 The tensile stress for AS shall be less than 100,000 psi.

3.8 Charpy V-notch impact testing is to be done for valve material (average 20 ft-lb for set of 3 [minimum value 15 ft-lb] at 30°F).

3.9 For radiography and acceptance criteria for valve castings, refer Cl. 4.2.

4.0 SS VALVES

4.1 Valve casting shall be in solution heat treated and pickled condition.

4.2 Critical body and bonnet casing section typically defined by ASME B16.34 shall be radiographed and shall meet ASTM E446 (upto 2" thick) Category A, B & CA Level 2, Category CB, OC & CD Level 3, Category D, B & F Level 0. For wall thickness 2" to 4.5" comparable plates of ASTM E186 shall be used. ASTM E94 and ASTM E142 shall be used for recommended practice & controlling quality of radiography as guide. The entire surface of all castings shall be dye-penetrant inspected after pickling.

4.3 Repair Welds shall be 100% radiographed and evaluated in accordance with paragraph 344.5 of ASME B31.3 with a minimum casting quality factor of 0.95. Dye Penetration test shall be as per ASTM E165 Procedure B-2, Interpretation as per Appendix-8 of ASME-VIII Div.1.

Copyright EIL – All rights reserved

वाल्वों के लिए
निरीक्षण एवं परीक्षण योजना

INSPECTION AND TEST PLAN
FOR
VALVES

Rev. No.	Date	Purpose	Prepared by	Checked by	Standards Committee Convenor	Standards Bureau Chairman
					Approved by	
7	08.05..2023	REVISED AND RE-ISSUED	NK	AK	RK	SM
6	14.11.2018	REVISED AND RE-ISSUED	KC	NM	RKS	RKT
5	17.06.2013	REVISED AND RE-ISSUED	TKK	RKS	SCG	DM
4	15.07.2011	REVISED AND RE-ISSUED	TKK	SCG	AKC	DM
3	30.06.2010	REVISED AND RE-ISSUED	RKB	VKJ	SKP	ND
2	31.01.2008	REVISED AND RE-ISSUED	CS	SS	MVKK	VC

Copyright EIL – All rights reserved

Abbreviations:

CEIL	:	Certification Engineers International Limited	MRT	:	Mechanical Run Test
CIMFR	:	Central Institute of Mining & Fuel Research	NDT	:	Non Destructive Testing
CE	:	Carbon Equivalent	NPSH	:	Net Positive Suction Head
DFT	:	Dry Film Thickness	PO	:	Purchase Order
DPT	:	Dye Penetrant Testing	PESO	:	Petroleum Explosive Safety Organization
DHT	:	De-hydrogen Heat Treatment	PQR	:	Procedure Qualification Record
ERTL	:	Electronics Regional Test Laboratory	PR	:	Purchase Requisition
FCRI	:	Fluid Control Research Institute	PMI	:	Positive Material Identification
HT	:	Heat Treatment	RT	:	Radiography Testing
HIC	:	Hydrogen Induced Cracking	SSCC	:	Sulphide Stress Corrosion Cracking
ITP	:	Inspection and Test Plan	TC	:	Test Certificate
IP	:	Ingress Protection	TPI or TPIA	:	Third Party Inspection Agency
IHT	:	Intermediate Heat Treatment	UT	:	Ultrasonic Testing
IC	:	Inspection Certificate	VDR	:	Vendor Data Requirement
IGC	:	Inter Granular Corrosion	WPS	:	Welding Procedure Specification
MPT/MT	:	Magnetic Particle Testing	WPQ	:	Welders Performance Qualification
MTC	:	Material Test Certificate			

Inspection Standards Committee

Convenor : Mr. Rajeev Kumar

Members:

Mr. Rajesh Sinha	Mr. Himangshu Pal	Mr. Chandrashekhar	Mr. R Muthu Ramalingam (RPO Rep.)
Mr. Avdhesh Agrawal	Mr. Mahendra Mittal	Ms Sulakshna Hundekari (Piping)	

Copyright EIL – All rights reserved

1.0 SCOPE

This Inspection and Test Plan covers the minimum testing requirements of Valves.

2.0 REFERENCE DOCUMENTS

PO/PR/Standards referred therein/ Job specifications /Approved documents.

3.0 INSPECTION AND TEST REQUIREMENTS

SL NO	STAGE / ACTIVITY	CHARACTERISTICS	QUANTUM OF CHECK	RECORD	SCOPE OF INSPECTION		
					SUB SUPPLIER	SUPPLIER	EIL/TPIA
1.0	**Procedure**						
1.1	Hydrostatic Test, Heat Treatment, NDT, Helium Leak Test, Fugitive Emission Test, Internal/ External Coating Procedures & Other Procedures (Wherever applicable as per MR/ PR)	NDT Level III Approved Documented Procedures	100%	NDT Level III Approved Procedure Documents	-	H	R
1.2	WPS, PQR & WPQ and NDT operator Qualification Record	Welding Parameters & Qualification Record	100%	WPS, PQR &WPQ	-	H	W- New R- Existing

Copyright EIL – All rights reserved

SL NO	STAGE / ACTIVITY	CHARACTERISTICS	QUANTUM OF CHECK	RECORD	SCOPE OF INSPECTION		
					SUB SUPPLIER	SUPPLIER	EIL/TPIA
1.3	Pre-Qualification Tests	Fire safe, Cryogenic, Fugitive Emission Test, Internal Epoxy Coating, Glass Lined Coating & Other Test as applicable	As per PR / Purchase Specification	Acceptance Report	-	H	H (If new)
2.0	**Material Inspection**						
2.1	Castings & Forgings (Body, Bonnet, Disc, Stem, Body ring)	Chemical, Mechanical (Tensile, Hardness, Impact Test etc.), Heat Treatment, NDT, IGC & Other Properties as applicable	100%	Test Certificates	H	R	R
2.2	Castings & Forgings (Body, Bonnet, Disc, Stem, Body ring)	Visual & Dimension	100%	Inspection Report	H	H	-
2.3	Body and Bonnet Castings	Radiography Examination after Heat Treatment	As per PR / Purchase Specification	RT Films and NDT reports	H	R	R
2.4	Bars for Trim material	Chemical Analysis	Each Heat	Test Certificates & Lab Report	H	R	-

Copyright EIL – All rights reserved

SL NO	STAGE / ACTIVITY	CHARACTERISTICS	QUANTUM OF CHECK	RECORD	SCOPE OF INSPECTION		
					SUB SUPPLIER	SUPPLIER	EIL/TPIA
2.5	Gaskets, Gear units, Fasteners, Gland, Packings, etc.	Physical / Chemical Properties	100%	Test Certificates & Lab Report	H	R	-
2.6	Actuators as applicable	Performance, Statutory Certificates etc. As per EIL ITP. 6-81-1091	100%	Test Certificates, Inspection report	H	H	R
3.0	**In Process Inspection**						
3.1	Welding, Weld Overlay, Stelliting, Hardfacing (As applicable)	Welding Parameters as per WPS / PQR	100%	Inspection Reports	-	H	-
3.2	Machining of components	Visual / Dimension	100%	Inspection Reports	-	H	-
3.3	DP Test for all weld joints, Bevel Ends & Bypass (as applicable)	Dye Penetrant Test	100%	NDT Report	-	H	RW
3.4	Hardness Check	Heat Treat Castings, Weld Joints, Grove Joints etc.	100%	Inspection Reports	-	H	R
4.0	**Final Inspection**						

Copyright EIL – All rights reserved

SL NO	STAGE / ACTIVITY	CHARACTERISTICS	QUANTUM OF CHECK	RECORD	SCOPE OF INSPECTION		
					SUB SUPPLIER	SUPPLIER	EIL/TPIA
4.1	a. Shell Hydrotest b. Seat Hydro Test (Both Sides) c. Backseat Hydrotest (Gate & Globe Valves) d. Seat Pneumatic/ Air Test	Leak Check	100%	Pressure Test Report, Water quality Report		H	RW (Note 1)
4.2	Helium Leak test / Vacuum Test (as applicable)	Leak Check	As per PR / Purchase Specification	Test Report	-	H	RW (Note 1)
4.3	Visual & Dimensional Check	Surface Verification & Dimension Measurement	100%	Test Report	-	H	RW (Note 1)
4.4	Functional Test for Motor/ Actuator Operated Valves	Satisfactory Performance	100%	Test Report	-	H	RW
4.5	Marking Verification	Verification of Marking, Valve Tagging & Name Plate Checking	100%	Marking & Tagging Report		H	RW (Note-1)
4.6	PMI Check	Chemical Check	As per EIL Spec. 6-81-0001	PMI Report	-	H	RW

Copyright EIL – All rights reserved

SL NO	STAGE / ACTIVITY	CHARACTERISTICS	QUANTUM OF CHECK	RECORD	SCOPE OF INSPECTION		
					SUB SUPPLIER	SUPPLIER	EIL/TPIA
4.7	Strip Check (As applicable)	Verify Components for wear, damage , harmful defects & Differential hardness as applicable	As per PR / Purchase Specification	Inspection Report	-	H	RW (Note-1)
4.8	Final Stamping	Stamping of Accepted Valves	Stamping of Valves which are witnessed by EIL/TPIA.	Inspection Report	-	H	H (Note-1)
5.0	**Painting**						
5.1	Painting/ Pickling & Passivation and Color coding as applicable	Visual / DFT Check	100%	Inspection Report	-	H	-
6.0	**PACKING & PROTECTION**						
6.1	Packing & Protection	Dispatch Instructions as per Technical Notes for Valves	100%	Compliance Report with photographs		H	RW
7.0	**Documentation & Inspection Certificate**						

Copyright EIL – All rights reserved

SL NO	STAGE / ACTIVITY	CHARACTERISTICS	QUANTUM OF CHECK	RECORD	SCOPE OF INSPECTION		
					SUB SUPPLIER	SUPPLIER	EIL/TPIA
7.1	Documentation & Inspection Certificate (IC)	Review of Stage Inspection Reports / Test Reports & Issue of IC	100%	Supplier TC & IC	-	H	H

Legend: H- Hold (Do not proceed without approval), P-Perform, RW - Random Witness (As specified or 10% (min.1 no. of each size and type of Bulk item)), R-Review, W-Witness (Give due notice, work may proceed after scheduled date).

NOTES (As applicable):

1. Non NACE & Non Hydrogen service Carbon Steel Cast Valves up to size 12"-300ANSI Class and Carbon Steel Forged Valves up to size 1.5"- 800 ANSI Class will be accepted on review of Supplier Test Certificates.
   Supplier Test Certificate along with back up reports to be reviewed by EIL/TPIA.
2. This document describes the generic test requirements. Any additional test or Inspection scope if specified in contract documents shall also be applicable. (Unless otherwise agreed upon)
3. Acceptance Norms for all the activities shall be as per PO/PR/STANDARDS referred therein /Job Specification /Approved Documents.

Copyright EIL – All rights reserved

विक्रेता कार्यशाला में सकारात्मक सामग्री पहचान के लिए मानक विनिर्देश

STANDARD SPECIFICATION FOR POSITIVE MATERIAL IDENTIFICATION (PMI) AT SUPPLIER'S WORKS

Rev. No	Date	Purpose	Prepared by	Checked by	Standards Committee Convenor	Standards Bureau Chairman
					Approved by	
4	23.12.21	REVISED AND RE-ISSUED	HKM	CS	RK	S Majumdar
3	19.09.16.	REVISED AND RE-ISSUED	TKK	HP	RKS	RN
2	20.10.11	REVISED AND RE-ISSUED	RKS	SCG	AKC	DM
1	15.07.08	REVISED AND RE-ISSUED	NKR	SSL	SKP	VC
0	07.12.00	ISSUED AS STANDARD SPECIFICATION	AKC	AKB	AKB	MI

Copyright EIL – All rights reserved

Abbreviations:

API	:	American Petroleum Institute
AS	:	Alloy Steel
HIC	:	Hydrogen Induced Cracking
LSTK	:	Lump Sum Turn Key
NACE	:	National Association of Corrosion Engineers
PMI	:	Positive Material Identification
RTJ	:	Ring Type Joint
Sch	:	Schedule
SS	:	Stainless Steel
TPI or TPIA	:	Third Party Inspection Agency

Inspection Standards Committee

Convenor: Mr. Rajeev Kumar

Members: Mr. Rajesh Sinha
Mr. Himangshu Pal
Mr. R. Muthuramalingam (RPO Representative)
Mr. Chandrashekhar
Mr. Avdhesh Agrawal
Mr. P V Satyanarayana (Engg. Representative)
Mr. Mahendra Mittal

Copyright EIL – All rights reserved

CONTENTS

1.0 SCOPE 4
2.0 REFERENCE DOCUMENTS 4
3.0 DEFINITIONS 4
4.0 PMI EXAMINATION 5
5.0 ACCEPTABLE METHODS FOR PMI 5
6.0 EXTENT OF PMI EXAMINATION 6
7.0 ACCEPTANCE CRITERIA 6
8.0 REJECTION CRITERIA 7
9.0 RECORDING AND DOCUMENTATION 7
10.0 MARKING 7

Copyright EIL – All rights reserved

1.0 SCOPE

1.1 This specification applies to the requirements for Positive Material Identification (PMI) to be performed at the Supplier's works on Metallic Materials procured either directly by the Owner/EIL/ LSTK contractor or indirectly through the sub-Suppliers.

1.2 This specification covers the procedures and methodology to be adopted to assure that the chemical composition of the material is consistent with the material specifications as specified in purchase documents using 'Alloy Analyzer' at the time of final inspection before dispatch.

1.3 The scope of this specification shall include but shall not be limited to Positive Material Identification (PMI) to be performed on Materials listed below:

1.3.1 For alloy Steel materials as below:

- Alloy Steel Pipes including Clad Pipes
- Alloy Steel Flanges & Forgings
- Alloy Steel Fittings including Clad Fittings
- Alloy Steel Fasteners
- Alloy Cast & Forged steel valves
- Alloy Steel Instrumentation Items (Control Valves, Safety Valves etc.)
- Longitudinal Pipe & Fittings Welds.
- Gaskets (for Ring Type Joints)

1.3.2 For Carbon Steel materials as below:

- All Carbon Steel Piping items under NACE or HIC or H2 or Wet Hydrogen Sulfide (H_2S), Hydrofluoric acid (HF), Sulfuric acid (H_2SO_4) services etc.
- Carbon Steel flanges and valves (Rating 900# and above)
- LTCS items

Following items shall be excluded from scope of PMI examination.

- Gaskets other than for Ring Type Joints
- Internal Components of Valves

1.4 All grades of material supplies including Stainless Steels shall be liable for PMI test at site. In case of any defective materials being found at site, the Supplier shall be responsible to effect replacement of such defective materials at project site without any delays to the satisfaction of EIL site RCM (Resident Construction Manager).

2.0 REFERENCE DOCUMENTS

2.1 API Recommended Practice 578 (Third Edition, Feb 2018) - Material Verification Program for New and Existing Alloy Piping Systems.

3.0 DEFINITIONS

3.1 **Supplier:** Any Supplier or Manufacturer on whom an order is placed for the supply of referred items. This definition shall also include any sub-Supplier or manufacturer on whom a sub-order is placed by the Supplier.

3.2 **Inspection Lot:** A group of items offered for inspection covered under same size, Heat and Heat treatment lot.

Copyright EIL – All rights reserved

3.3 **Alloy Material:** Any metallic material (including welding filler materials) that contains alloying elements such as Chromium, Nickel, Molybdenum or Vanadium, which are intentionally added to enhance mechanical or physical properties and/or corrosion resistance.

4.0 PMI EXAMINATION

4.1 The Supplier shall submit a procedure of PMI to comply with the requirements of this Specification. Approval of PMI Procedure shall be obtained from Owner / EIL / TPIA prior to commencing manufacture / inspection of product.

4.2 PMI examination of materials is independent of any certification, markings or colour coding that may exist and is aimed at verifying that the alloy used are as per specified grades.

4.3 The Supplier shall identify all incoming alloy materials and maintain full traceability of all alloy
materials, including all off-cuts. Transfer of identification marks shall be undertaken prior to cutting to ensure maintenance of identification on off-cuts.

4.4 The Supplier shall ensure that all alloy materials are segregated and stored in separately identified locations to prevent the mix up of materials of different alloy specifications or alloy material with carbon steel. Non ferro-magnetic materials shall be segregated at all times from ferro-magnetic materials.

4.5 PMI examination is subject to surveillance inspection by Owner / EIL / TPIA.

5.0 ACCEPTABLE METHODS FOR PMI

5.1 The method used for PMI examination shall provide a quantitative determination of the alloying elements like Chromium, Nickel, Molybdenum or Vanadium in Alloy Steel items.

5.2 Instruments or methods used for PMI examination shall be able to provide quantitative, recordable, elemental composition results for positive identification of alloying elements present.

5.3 The acceptable instruments for alloy analyzer shall be either "Portable X-Ray fluorescence" or "Optical Emission" type each capable of verifying the percentage of alloy elements within specified range.

5.4 Chemical spot testing, magnets, alloy sorters and other methods using eddy current or triboelectric testing methods are not acceptable for PMI examination.

5.5 The PMI instrument used shall have the sensitivity to detect the alloying elements in the specified range.

5.6 All PMI instruments shall have been serviced within a 6 month period of the time of use to verify the suitability of batteries, sources etc., and the data of the last service shall be stated on the PMI Report Form (Sample enclosed).

5.7 Each analyzer must be calibrated according to the manufacturer's specification at the beginning and end of each shift. Instrument must be checked against known standard for each alloy type to be inspected during the shift.

5.8 Certified samples, with full traceability, of a known alloy materials shall be available for use as a random spot check on the instrument calibration.

Copyright EIL – All rights reserved

5.9 The surfaces to be examined shall be prepared by light grinding or abrasive paper and solvent cleaner. Evidence of Arc burn resulting from examination shall be removed by light grinding or abrasive paper. No permanent marks, which are injurious to the usage of product in service, are acceptable.

5.10 Alloy Steel ring type joint Gaskets shall be inspected by using portable X-Ray fluorescence instrument.

5.11 Testing shall be done as per the procedures outlined by the manufactures of alloy analyzer being used. Modification of these procedures if any must be approved by Owner/EIL.

5.12 The persons performing PMI shall demonstrate their capabilities to the satisfaction of Owner/EIL/TPIA visiting engineer. If the Supplier has qualified operator on their rolls, he may perform the examination. Otherwise PMI examination shall be sub-contracted to an independent testing agency approved by EIL.

5.13 Whenever material is identified as not meeting requirements by the visiting engineer a rejection note shall be issued.

6.0 EXTENT OF PMI EXAMINATION

Following sampling plans shall be applicable for PMI examination of various items.

A. Flanges, Fittings Valves, RTJ Gaskets - 100% by Supplier and 10% @ random witness by EIL/TPIA

B. Pipes - 100% (for pipes procured from traders)
2 random samples drawn from each Size/Heat/Lot (for pipes procured directly from mills)

C. Fasteners -

Lot Size	**Sample Size for** EIL/TPIA	Sample size for Supplier
Upto 100	2% (Min 2)	Min 10%
101 to 500	1% (Min 3)	Min 10%
501 and above	0.5% (Min 5)	Min 10%

Note:

a. For Welded Pipes and Fittings and flanges like Fig 8, Spacer and blinds etc. PMI shall be performed on Base Metal as well as weldments.

7.0 ACCEPTANCE CRITERIA

7.1 Base Metal

PMI test results showing presence of characteristic elements upto 10% less than the minimum specified value in the material specification and upto 10% more than the maximum specified value in the material specification shall be acceptable.

7.2 Deposited Weld Metal

For deposited weld metal using welding consumables matching with base metals, the recorded presence of characteristic elements upto 12.5% less than the minimum specified value in the

Copyright EIL – All rights reserved

welding consumable specification and upto 12.5% more than the maximum specified value in the welding consumable specification shall be acceptable.

8.0 REJECTION CRITERIA

8.1 If PMI test results fall outside the acceptable range as specified in 7.0 above, the supplier shall obtain a quantitative check analysis performed by a laboratory acceptable to Owner / EIL / TPIA for a complete chemical analysis. Alternatively, the item can be tested with a spark analyser for verification. Results of this analysis shall be submitted to Owner / EIL / TPIA for final decision.

Decision of Owner / EIL / TPIA shall be final in this regard.

8.2 If any sample drawn to PMI test on the basis of percentage selection as per 6.0 above, fails to meet specification requirements, 100% of items of lot shall be tested for PMI by supplier. Any failure thereafter during sample check shall mean rejection of whole lot.

9.0 RECORDING AND DOCUMENTATION

The results of PMI examination shall be recorded in a Report Format as enclosed with this specification.

10.0 MARKING

10.1 All alloy materials tested by PMI shall be identified using either of the following methods by indicating "PMI OK"

a) Bar Code/Hologram Sticker
b) A low stress stamp marking

Copyright EIL – All rights reserved

	POSITIVE MATERIAL IDENTIFICATION REPORT BULK MATERIALS							Page of
Project:		Client						Job No.
PMI Report No.		Supplier/Sub-Supplier						
Purchase Order No.		Testing Agency						
Purchase Requisition No:		PMI Location						
Bulk Item Type (as per Requisition)								
Material Specification/Grade Number of items in Lot								
Requisition Item No./ Description		Major content, Weight Percent						Remarks Accept/Reject
Element	Cr	Ni	Mo	V	Ti *	Cb/ Nb **	Mn ***	
Specified Range								
Actual observations 1.								
2.								
3.								
4.								
5.								
6.								
7.								
8.								
Instrument Type / ID Last Service Date		Inspection Agency						Witnessed By

* To be reported in case of SS321 Material
** To be reported in case of SS347 Material
*** To be reported in case of LTCS Material

Copyright EIL – All rights reserved

बोलीकर्ता से गुणवत्ता प्रबंधन प्रणाली अपेक्षाओं हेतु विनिर्देश

SPECIFICATION FOR QUALITY MANAGEMENT SYSTEM REQUIREMENTS FROM BIDDERS

Rev. No	Date	Purpose	Prepared by	Checked by	Standards Committee Convener	Standards Bureau Chairman
					Approved by	
2	12.06.20	General Revision	QMS Standards Committee	QMS Standards Committee	SKB	SKS
1	12.03.15	General Revision	QMS Standards Committee	QMS Standards Committee	MPJ	SC
0	04.06.09	Issued as Standard Specification	QMS Standards Committee	QMS Standards Committee	SCT	ND

Copyright EIL – All rights reserved

Abbreviations:

ISO	-	International Organization for Standardization
MR	-	Material Requisition
PO	-	Purchase Order
PR	-	Purchase Requisition
QMS	-	Quality Management System

QMS Standards Committee

Convener: Mr. S.K. Badlani

Members: Mr. Sanjay Mazumdar (Engg.)
Mr. R.K. Singh (SCM)
Mr. B. Biswas (SCM)
Mr. Ravindra Kumar (Const.)
Mr. Vinod Kumar (CQA)
Mr. Swapnil Vaishnav (Projects)

Copyright EIL – All rights reserved

CONTENTS

Clause No.	Title	Page
1.0	SCOPE	4
2.0	DEFINITIONS	4
3.0	REFERENCE DOCUMENTS	4
4.0	QUALITY MANAGEMENT SYSTEM – GENERAL	4
5.0	QUALITY SYSTEM REQUIREMENTS	4
6.0	AUDITS	7
7.0	DOCUMENTATION REQUIREMENTS	7

Copyright EIL – All rights reserved

1.0 SCOPE

This specification establishes the Quality Management System requirements to be met by BIDDER for following purpose:

- QMS requirements to be met by suppliers / contractors after award of work / during contract execution.

2.0 DEFINITIONS

2.1 Bidder

For the purpose of this specification, the word "BIDDER" means the person(s), firm, company or organization who is under the process of being contracted by EIL / Owner for delivery of some products (including service). The word is considered synonymous to supplier, contractor or vendor.

2.2 Project Quality Plan

Document tailored from Standard Quality Management System Manual of BIDDER, specifying how the quality requirements of the project will be met.

2.3 Owner

Owner means the owner of the project for which services / products are being purchased and includes their representatives, successors and assignees.

3.0 REFERENCE DOCUMENTS

6-78-0002	Specification for Documentation Requirements from Contractors
6-78-0003	Specification for Documentation Requirements from Suppliers

4.0 QUALITY MANAGEMENT SYSTEM – GENERAL

Unless otherwise agreed with EIL / Owner, the BIDDER proposed quality system shall fully satisfy all relevant requirements of ISO 9001 "Quality Management Systems – Requirements." Evidence of compliance shall be current certificate of quality system registration to ISO 9001 or a recent compliance audit recommending registration from a certification agency. The quality system shall provide the planned and systematic control of all quality related activities for execution of contract. Implementation of the system shall be in accordance with BIDDER'S Quality Manual and PROJECT specific Quality Plan.

5.0 QUALITY SYSTEM REQUIREMENTS

5.1 BIDDER shall prepare and submit for review / record, Project Quality Plan / Quality Assurance Plan for contracted scope / job. The BIDDER'S Quality Plan shall address all of the applicable elements of ISO 9001, identify responsible parties within BIDDER'S organization, for the implementation / control of each area, reference the applicable procedures used to control / assure each area, and verify the documents produced for each area. The Project Quality Plan shall necessarily define control or make reference to the relevant procedures, for design and engineering, purchase, documentation, record control, bid evaluation, inspection, production / manufacturing, preservation, packaging and storage, quality control at construction site, pre-commissioning, commissioning and handing over (as applicable) in line with contract requirement and scope of work.

Copyright EIL – All rights reserved

5.2 BIDDER shall identify all specified or implied statutory and regulatory requirements and communicate the same to all concerned in his organization and his sub contractor's organization for compliance.

5.3 BIDDER shall deploy competent and trained personnel for various activities for fulfillment of PO / contract. BIDDER shall arrange adequate infrastructure and work environment to ensure that the specification and quality of the deliverable are maintained.

5.4 BIDDER shall do the quality planning for all activities involved in delivery of order. The quality planning shall cover as minimum the following:

- Resources
- Product / deliverable characteristics to be controlled.
- Process characteristics to ensure the identified product characteristics are realized
- Identification of any measurement requirements, acceptance criteria
- Records to be generated
- Need for any documented procedure

The quality planning shall result into the quality assurance plan, inspection and test plans (ITPs) and job procedures for the project activities in the scope of bidder. These documents shall be submitted to EIL / Owner for review / approval, before commencement of work.

5.5 Requirements for sub-ordering of outsourced items / sub-contracting / purchasing of services specified in MR / contract / tender shall be adhered to. In general all outsourced items will be from approved vendors of EIL. Wherever requirements are not specified, or approved sub vendors do not exist, the sub-contractor shall establish and maintain a system for purchasing / sub-contracting to ensure that purchased product / service conforms to specified requirements in concurrence with EIL / Owner. Criteria for selection of sub-contractor, evaluation, re-evaluation, maintenance of purchasing data and verification of purchased product (sub-contractor services), constitute important components of this requirement.

5.6 BIDDER shall plan and carry production and service provision under controlled conditions. Controlled conditions shall include, as applicable

a) the availability of information that describes the characteristics of the product
b) the availability of work instructions
c) the use of suitable equipment
d) the availability and use of monitoring and measuring devices
e) the implementation of monitoring and measurement
f) the implementation of release, delivery and post-delivery activities

5.7 BIDDER shall validate any processes for production and service provision where resulting output cannot be verified by subsequent monitoring and measurement. This includes any process where deficiencies become apparent only after the product is in use or service has been delivered.

5.8 BIDDER shall establish a system for identification and traceability of product / deliverable throughout product realization. Product status with respect to inspection and testing requirements shall be identified.

Copyright EIL – All rights reserved

5.9 BIDDER shall identify, verify, protect and safeguard EIL / Owner property (material / document) provided for use or incorporation into the product. If any Owner / EIL property is lost, damaged or otherwise found to be unsuitable for use, this shall be reported to the EIL / Owner.

5.10 BIDDER shall ensure the conformity of product / deliverable during internal processing and delivery to the intended destination. Requirements mentioned in the MR/ tender shall be adhered to.

5.11 BIDDER shall establish system to ensure that inspection and testing activities are carried out in line with requirements. Where necessary, measuring equipment shall be calibrated at specified frequency, against national or international measurement standards; where no such standard exists, the basis used for calibration shall be recorded. The measuring equipment shall be protected from damage during handling, maintenance and storage.

5.12 BIDDER shall ensure effective monitoring, using suitable methods, of the processes involved in production and other related processes for delivery of the scope of contract.

5.13 BIDDER shall monitor and measure the characteristics of the product / deliverable to verify that product requirement has been met. The inspection (stage as well as final) by BIDDER and EIL / Owner personnel shall be carried out strictly as per the approved ITPs or ITPs forming part of the contract. Product release or service delivery shall not proceed until the planned arrangements have been satisfactorily completed, unless otherwise approved by relevant authority and where applicable by Owner / EIL.

5.14 BIDDER shall establish and maintain a documented procedure to ensure that the product which does not conform to requirements is identified and controlled to prevent its unintended use or delivery

5.15 All non-conformities (NCs) / deficiencies found by the BIDDER'S inspection / surveillance staff shall be duly recorded, including their disposal action shall be recorded and resolved suitably. Effective corrective actions shall be implemented by the BIDDER so that similar NCs including deficiencies do not recur. The BIDDER shall take appropriate actions to address the Risks and Opportunities in the project.

5.16 All deficiencies noticed and reported by EIL / Owner shall be analyzed by the BIDDER and appropriate corrective actions shall be implemented. BIDDER shall intimate EIL / Owner of all such corrective action implemented by him.

5.17 BIDDER should follow the standards, specifications and approved drawings. Concessions / Deviations shall be allowed only in case of unavoidable circumstances. In such situations Concession / deviation request must be made by the BIDDER through online system of EIL eDMS. URL of EIL eDMS is http://edocx.eil.co.in/vportal.

5.18 BIDDER shall have documented procedure for control of documents.

5.19 All project records shall be carefully kept, maintained and protected for any damage or loss until the project completion, then handed over to EIL / Owner as per contract requirement (Refer Specification Nos. 6-78-0002 - Specification for Documentation Requirements from Contractors and 6-78-0003 - Specification for Documentation Requirements from Suppliers), or disposed as per relevant project procedure.

Copyright EIL – All rights reserved

6.0 AUDITS

BIDDER shall plan and carry out the QMS audit for the job. Quality audit programme shall cover design, procurement, construction management and commissioning as applicable including activities carried out by sub-vendors and sub-contractors. This shall be additional to the certification body surveillance audits carried out under BIDDER'S own ISO 9001 certification scheme.

The audit programmes and audit reports shall be available with bidder for scrutiny by EIL / Owner. EIL or Owner's representative reserves the right to attend, as a witness, any audit conducted during the execution of the WORKS.

In addition to above, EIL, Owner and third party appointed by EIL / Owner may also perform Quality and Technical compliance audits. BIDDER shall provide assistance and access to their systems and sub-contractor / vendor systems as required for this purpose. Any deficiencies noted shall be immediately rectified by BIDDER.

7.0 DOCUMENTATION REQUIREMENTS

BIDDER shall submit following QMS documents immediately after award of work (Within one week) for record / review by EIL / Owner/ TPIA, as applicable.

- Organization chart (for complete organization structure and for the project)
- Project Quality Plan / Quality Assurance Plan
- Job specific Inspection Test Plans, if not attached with PR
- Job Procedures
- Inspection / Test Formats

In addition to above QMS documents, following documentation shall be maintained by the BIDDER for submission to EIL / Owner on demand at any point of time during execution of the project.

- Quality Manual
- Certificate of approval for compliance to ISO: 9001 standard
- Procedure for Control of Non-conforming Product
- Procedure for Control of Documents
- Sample audit report of the QMS internal and external audits conducted during last one year
- Customer satisfaction reports from at least 2 customers,
- Project QMS audit report
- Technical audit reports for the project
- Corrective action report on the audits

Documents as specified above are minimum requirements. BIDDER shall submit any other document / data required for completion of the job as per EIL / Owner instructions.

Copyright EIL – All rights reserved

आपूर्तिकर्ताओं से प्रलेखन अपेक्षाओं हेतु विनिर्देश

SPECIFICATION FOR DOCUMENTATION REQUIREMENTS FROM SUPPLIERS

Rev. No	Date	Purpose	Prepared by	Checked by	Standards Committe Convener	Standards Bureau Chairman
					Approved by	
2	12.06.20	General Revision	QMS Standards Committee	QMS Standards Committee	SKB	SKS
1	12.03.15	General Revision	QMS Standards Committee	QMS Standards Committee	MPJ	SC
0	04.06.09	Issued as Standard Specification	QMS Standards Committee	QMS Standards Committee	SCT	ND

Copyright EIL – All rights reserved

Abbreviations:

DCI	-	Document Control Index
eDMS	-	Electronic Document Management System
FOA	-	Fax of Acceptance
IC	-	Inspection Certificate
IRN	-	Inspection Release Note
ITP	-	Inspection and Test Plan
LOA	-	Letter of Acceptance
MR	-	Material Requisition
PO	-	Purchase Order
PR	-	Purchase Requisition
PVC	-	Polyvinyl Chloride
QAP	-	Quality Assurance Plan
QMS	-	Quality Management System
RPO	-	Regional Procurement Office
TPIA	-	Third Party Inspection Agency
URL	-	Universal Resource Locator
V-Portal	-	Vendor Portal

QMS Standards Committee

Convener: Mr. S.K. Badlani

Members:
Mr. Sanjay Mazumdar (Engg.)
Mr. R.K. Singh (SCM)
Mr. B. Biswas (SCM)
Mr. Ravindra Kumar (Const.)
Mr. Vinod Kumar (CQA)
Mr. Swapnil Vaishnav (Projects)

Copyright EIL – All rights reserved

CONTENTS

Clause Title Page No.

1.0 SCOPE 4

2.0 DEFINITIONS 4

3.0 REFERENCE DOCUMENTS 4

4.0 DOCUMENTATION REQUIREMENTS 4

Attachments

Format for completeness of Final Documentation : Format No. 3-78-0004

Copyright EIL – All rights reserved

1.0 SCOPE

This specification establishes the Documentation Requirements from Suppliers.

All documents / data against the PO / PR / MR shall be developed and submitted to EIL / Owner by the suppliers for review / records, in line with this specification.

2.0 DEFINITIONS

2.1 Supplier

For the purpose of this specification, the word "SUPPLIER" means the person(s), firm, company or organization who has entered into a contract with EIL / Owner for delivery of some products (including service). The word is considered synonymous to bidder, contractor or vendor.

2.2 Owner

Owner means the owner of the project for which services / products are being purchased and includes their representatives, successors and assignees.

3.0 REFERENCE DOCUMENTS

6-78-0001	Specification for Quality Management System Requirements from Bidders

4.0 DOCUMENTATION REQUIREMENTS

4.1 Order Acknowledgement and Assigning Project Manager

After placement of order, Supplier shall acknowledge order through V-Portal within 7 days of receipt of FOA / PO. Supplier shall assign a Project Manager for that order though online portal and provide requisite details. Project Manager details shall include e-mail address, mailing address, mobile/telephone nos., fax nos. and name of Project Manager. All the system generated emails pertaining to that order shall be sent to the assigned Project Manager.

4.2 Documents / Data to be submitted by the Supplier

4.2.1 The Supplier shall submit the documents and data against the PO / PR / MR as per the list given in respective PO / PR / MR.

4.2.2 Review of the supplier drawings / documents by EIL would be only to review the compatibility with basic designs and concepts and in no way absolve the supplier of his responsibility / contractual obligation to comply with PR requirements, applicable codes, specifications and statutory rules / regulations. Any error / deficiency noticed during any stage of manufacturing / execution / inspection/ installation shall be promptly corrected by the supplier without any time and cost implications, irrespective of comments on the same were received from EIL during the drawing review stage or not.

Copyright EIL – All rights reserved

4.2.3 Unless otherwise specified, submission of documents for Review / Records shall commence as follows from the date of Fax of Intent / Letter of Intent / Fax of Acceptance (FOA) / Letter of Acceptance (LOA):

QMS	- 1 week
Document Control Index	- 2 weeks
Other Documents / Drawings	- As per approved Document Control Index

4.2.4 Documents as specified in PO / PR / MR are minimum requirements. Supplier shall submit any other document / data required for completion of the job as per EIL / Owner instructions.

4.3 Style and Formatting

4.3.1 All Documents shall be in ENGLISH language and in M.K.S System of units.

4.3.2 Before forwarding the drawings and documents, contractor shall ensure that the following information are properly mentioned in each drawing:

Purchase Requisition Number
Name of Equipment / Package
Equipment / Package Tag No.
Name of Project
Client
Drawing / Document Title
Drawing / Document No.
Drawing / Document Revision No. and Date

4.4 Review and Approval of Documents by Supplier

4.4.1 The Drawing / Documents shall be reviewed, checked, approved and duly signed / stamped by supplier before submission. Revision number shall be changed during submission of the revised supplier documents and all revisions shall be highlighted by clouds. Whenever the supplier require any sub-supplier drawings to be reviewed by EIL, the same shall be submitted by the supplier duly reviewed, approved and stamped by the supplier. Direct submission of sub-supplier's drawings without contractor's / suppliers' approval shall not be entertained.

4.5 Document Category

4.5.1 **Review Category**

Following review codes shall be used for review of supplier Drawings / Documents:

Review Code 1	-	No comments. Proceed with Manufacture / Fabrication as per the document.
Review Code 2	-	Proceed with Manufacture / Fabrication as per commented document. Revised document required.
Review Code 3	-	Document does not conform to basic requirements as marked. Resubmit for review.
R	-	Document is retained for Records. Proceed with Manufacturing / Fabrication as per PR / Tender requirements.
V	-	Void

Copyright EIL – All rights reserved

4.6 Methodology for Submission of Documents to EIL/Owner

4.6.1 Document Control Index (DCI)

Supplier shall create and submit Document Control Index (DCI) for review based on PO / PR / MR along with schedule date of submission of each drawing / document on EIL Vendor Portal. The DCI shall be specific with regard to drawing / document no. and the exact title. Proper sequencing of the drawings / documents should be ensured in schedule date of submission.

4.6.2 Submission of Drawings / Documents / Data

Drawings / documents, data and DCI shall be uploaded on the EIL Vendor Portal as per approved DCI. The detailed guidelines for uploading documents on EIL Vendor Portal are available on following URL

http://edocx.eil.co.in/vportal

4.6.3 Statutory Approvals

Wherever approval by any statutory body is required to be taken by Supplier, the Supplier shall submit copy of approval by the authority to EIL.

4.6.4 Manufacturing Schedule

Supplier shall prepare manufacturing schedule for the order, with key milestone activities (such as document submission, sub ordering, manufacturing, Inspection, dispatches, etc) to meet delivery as per FOA / PO terms. Supplier shall submit manufacturing schedule to concerned Regional Procurement Office (RPO) of EIL / Owner for review within 2 weeks from date of FOA / PO.

4.6.5 Schedule and Progress Reporting

Supplier shall submit monthly progress (MPR) report and updated procurement, engineering, manufacturing status, Inspection and dispatch status (schedule vs. actual) and highlight constraints, if any, along with action plan for mitigation, to the concerned Regional Procurement Office (RPO) of EIL / Owner by 1st week of every month., First MPR shall be submitted within 2 weeks from FOA / LOA. In case of exigencies, EIL / Owner can ask for report submission as required on weekly / fortnightly / adhoc basis depending upon supply status and supplier shall furnish such reports promptly without any price implication. Format for progress report shall be submitted by the Supplier during kick off meeting or within 2 weeks of receiving FOA / LOA, whichever is earlier.

4.7 Inspection and Testing

4.7.1 Quality Assurance Plan / Inspection and Test Plan

If Inspection and test plans (ITP) are attached with MR / PR same shall be followed along with additional tests requirement (if any) mentioned in MR/ PR. However for cases wherein EIL Standard ITPs not available / have not been attached with MR / PR, Supplier shall submit within one week of receiving FOA / LOA, the Quality Assurance Plan for inspection & testing at various stages of production, quality control records for critical bought out items / materials and site assembly & testing as may be applicable to the specific order and obtain approval from concerned Regional procurement Office of EIL / third party inspection agency, as applicable.

Copyright EIL – All rights reserved

For Package equipment contracts, the supplier shall prepare a list of items / equipment and their inspection categorization plan for all items included in the scope of supply immediately after receipt of order and obtains approval for the same from EIL. The items shall be categorized into different categories depending upon their criticality for the scope of inspection of TPIA and / or EIL.

4.7.2 **Inspection Requisition:**

Supplier shall perform internal inspection as per ITP/ approved QAP at their works based on approved documents / drawings. Upon satisfactory internal inspection, supplier shall raise inspection call to concerned Regional Procurement Office (RPO) of EIL / TPIA / Owner with advance notice as per contract along with Internal test reports.

All changes w.r.t. PR shall be recorded through agreed variations or Concessions & Deviations. Conflict, if any, between PR / Job specifications and approved drawings, shall be brought to the notice of EIL / owner by the supplier / contractor. Decision of EIL / owner will be binding on the supplier and to be complied without time and cost implications.

Identified bought out items/ raw material shall be procured under TPIA as per ITP.

4.7.3 **Inspection Release Note (IRN)/ Inspection Certificate (IC)**

IRN / IC shall be issued by EIL Inspector / third party inspection agency on successful inspection, review of test reports / certificates as per specifications & ITP / agreed quality plan (as applicable) and only after all the drawings / documents as per DCI are submitted and are accepted under review code-1 or code R. Supplier shall ensure that necessary documents / manufacturing and test certificates are made available to EIL / TPIA as and when desired.

Note 1: Non fulfilling above requirement shall result into appropriate penalty or with- holding of payment as per conditions of PO / PR / MR.

Note 2: For items where IRN/IC is issued by TPIA, supplier to ensure that following as a minimum must be mentioned by TPIA in IRN / IC

a) PR document number
b) List of drawings / documents with EIL approval code
c) Tests witnessed, documents reviewed
d) Compliance statement by TPIA that product meets the requirement as specified in EIL PR, standard specifications, Inspection Test Plan / QAP and approved documents.

4.8 Transportation Plan

Transportation Plan for Over Dimensional Consignments (ODC), if any, shall be submitted within 2 weeks of receiving FOA / LOA, for approval. Consignment with parameters greater than following shall be considered as over dimensional.

Dimensions: 4 meters width x 4 meters height x 20 meters length

Weight : 32 MT

Dimensions and weight provided above are inclusive of all nozzles, attachments, transportation saddles etc.

Copyright EIL – All rights reserved

Physical Rout survey for ODC movement shall be submitted to EIL within 8 weeks of receiving FOA / LOA.

4.9 Dispatch Details

Upon receipt of IRN / IC from EIL inspector / TPIA, supplier shall dispatch items within 2 days. Supplier shall submit dispatch details to concerned RPO of EIL / Owner within a day of dispatch. Dispatch details shall include Lorry Receipt (LR) number / Dispatch Number, Transporter Name, Date of dispatch, Packing list, Invoice copy etc.

4.10 Final Documentation

4.10.1 Supplier shall prepare final documents in line with VDR (Vendor Document Requirements) attached with PR/Tender. A copy of final document along with filled in Format for Completeness of Final Documentation (Format No. 3-78-0004) to be submitted to EIL Inspector / TPIA for review & approval within 2 weeks from dispatch. Upon receipt of EIL/TPIA endorsement on Completeness of Final Documents, supplier shall submit soft / hard copies of Final documents to EIL / Owner in requisite quantity as per PO / PR details, along with covering letter. A copy of covering letter to be submitted to the concerned Regional Procurement Office (RPO) of EIL/Owner.

4.10.2 **As Built Drawings**

Minor Shop changes made by Supplier after approval of drawings under 'Code 1' by EIL and deviations granted through online system ,if any, shall be marked in hard copies of drawings which shall then be stamped 'As-built' by the supplier. These 'As-built' drawings shall be reviewed and stamped by EIL Inspector / TPIA. Supplier shall prepare scanned images files of all marked – up 'As – built' drawings. Simultaneously Supplier shall incorporate the shop changes in the native soft files of the drawings also.

4.10.3 **Packing / Presentation of Final Documents**

Final Documents shall be legible photocopies in A4, A3 size only. Drawings will be inserted in plastic pockets (both sides transparent, sheet thickness minimum 0.1 mm) with an extra strip of 12 mm wide for punching so that drawings are well placed.

Final Documentation shall be bound in Hard board Plastic folder(s) of size 265 mm x 315 mm ($10^1/_2$ inch x $12^1/_2$ inch) and shall not be more that 75 mm thick. It may be of several volumes and each volume shall have a volume number, index of volumes and index of contents of that particular volume. Where number of volumes are more, 90mm thickness can be used. Each volume shall have top PVC sheet of minimum 0.15 mm thick duly fixed and pressed on folder cover and will have 2 lever clip. In case of imported items documents, 4 lever clip shall also be accepted. All four corners of folders shall be properly metal clamped. Indexing of contents with page numbering must be incorporated by supplier. Spiral/Spico bound documents shall not be acceptable. As mentioned above, books should be in hard board plastic folders with sheets punched and having 2/4 lever clips arrangement.

Each volume shall contain on cover a Title Block indicating package Equipment Tag No. & Name, PO / Purchase Requisition No., Name of Project and Name of Customer. Each volume will have hard front cover and a reinforced spine to fit thickness of book. These spines will also have the title printed on them. Title shall include also volume number (say 11 of 15) etc.

4.10.4 **Submission of Soft Copies**

Supplier shall submit to EIL, the scanned images files as well as the native files of drawings / documents, along with proper index.

In addition to hard copies, Supplier shall submit soft copies of all the final drawings and documents in pen drive or any other specified medium with proper identification tag, all text documents prepared on computer, scanned images of all important documents (not available

Copyright EIL – All rights reserved

as soft files), all relevant catalogues, manuals available as soft files (editable copies of drawings/text documents, while for catalogues / manuals / proprietary information and data, PDF files can be furnished).

All the above documents shall also be uploaded on the EIL Vendor Portal and if applicable on Client Server also.

4.10.5 **Completeness of Final Documentation**

Supplier shall get the completeness of final documentation verified by EIL / TPIA, as applicable, and attach the Format for Completeness of Final Documentation (Format No. 3-78-0004) duly signed by EIL Inspector or TPIA as applicable to the final document folder.

Copyright EIL – All rights reserved

COMPLETENESS OF FINAL DOCUMENTATION

Name of Supplier/Contractor	:	
Customer	:	
Project	:	
EIL's Job No.	:	
Purchase Order No./ Contract No.	:	
Purchase Requisition No./ Tender No.	:	Rev. No. :
Name of the Work/ Equipment	:	
Tag. No.	:	
Supplier's / Contractor's Works Order No.	:	

Certified that the Engineering Documents / Manufacturing & Test Certificates submitted by the supplier (as per Index sheet mentioned in Annexure-1) are complete in accordance with the Vendor Data Requirements of Purchase Requisition / Tender.

Signature	: …….	Signature	: …….
Date	: …….	Date	: …….
Name	: ……..	Name	: ……..
Designation	: ……	Designation	: ……
Department	: ……	Department	: ……
	Supplier / Contractor		EIL / TPIA

Copyright EIL – All rights reserved

Annexure-1

Final Documentation Index Sheet			
PR/PO/Tender No.		Rev. No.	
Serial No.	Document Title	Page/ Folder No.	No. of Pages

Signature	: …….	Signature	: …….
Date	: …….	Date	: …….
Name	: ……..	Name	: ……..
Designation	: ……	Designation	: ……
Department	: ……	Department	: ……

Supplier / Contractor

EIL / TPIA

Copyright EIL – All rights reserved

VENDOR DATA REQUIREMENTS
FOR
VALVES-CRYOGENIC TOP ENTRY BALL &
BFV & SPECIAL BFV

Rev. No.	Date	Purpose	Prepared by	Checked by	Approved by
0	21-NOV-2025	REISSUED WITH BIDS	AG	AB	PS

Copyright EIL - All rights reserved

VENDOR DATA REQUIREMENTS

The following drawings/documents marked "✔" shall be furnished by the bidder.

S. N O.	DESCRIPTION	WITH BID	POST ORDER			REMARKS
			FOR REVIEW	FOR RECORD	WITH DATA BOOK (FINAL)	
1.	Document Control Index		✔			
2.	Duly filled Experience Record Pro-forma (ERP) as specified in document No. B862-000-16-43-ERP-3138 REV.0 & Documentation as per Qualification criteria as specified in Doc. No. B862-000-16-43-BQC-3138 REV.0	✔				
3.	DETAIL DIMENSIONAL DRAWING WITH MOC (INCLUDING DETAILS OF SPRING RETURN TYPE ARRANGEMENT, CAVITY RELIEF ARRANGEMENT WHEREVER APPLICABLE)		✔		✔	

Notes :

1. "TICK" denotes applicability.
2. Post order, drawing / document review shall commence only after approval of Document Control Index (DCI).
3. All post order documents shall be submitted / approved through EIL eDMS portal.
4. Final documentation shall be submitted in hard copy (Six prints) and soft (two CDs/DVDs) in addition to submission through EIL eDMS.
5. Refer - 6-78-0001: Specification for quality management system from Bidders.
6. Refer - 6-78-0003: Specification for documentation requirement from Suppliers.
7. All drawings & documents shall be submitted in A4 or A3 paper sizes. Documents in higher paper size shall be submitted in exceptional circumstances or as indicated in the MR/Tender.
8. Post order- The schedule of drawing / data submission shall be mutually agreed between EIL & the bidder / contractor / supplier during finalization of Document Control Index (DCI).
9. Bill of Material shall form part of the respective drawing.
10. Also refer other department's VDR :-
11. Electrical

Copyright EIL - All rights reserved

TECHNICAL COMPLIANCE

DISCIPLINE: PIPING

DOCUMENT No.: B862-000-16-43-TCL-3138

PROJECT: PDH-PP PLANT

MR VALVES- CRYOGENIC TOP ENTRY BALL & BFV & SPECIAL BFV

OWNER: M/s PETRONET LNG LTD.

EIL JOB No.: B862

BIDDER: _____

Notes:

1. The bidder shall indicate their reply in the space provided in the Technical Questionnaire. In case space provided is not adequate, the reply may be furnished separately under suitably numbered annexes/ attachments duly referred against the comment/ query.

2. The Compliance Statements/ Queries are required to be categorically confirmed/ answered by the bidder and the completely filled in technical questionnaire shall be submitted together with the BID.

Bidder's Signature & Stamp	

Rev. No	Date	Purpose	Prepared by	Checked by	Approved by
B	18-11-2025	ISSUED FOR BIDS	AG	AB	AB/PSSW
A	21-08-2025	ISSUED FOR BIDS	AG	AB	AB/PPSW

Copyright EIL – All rights reserved

Sl.No	COMMENT / QUERY	BIDDER'S CONFIRMATION / ANSWER
1.	Bidder shall confirm compliance to all the attachments listed in "List of Attachment" of MR & provide signed & stamped copy of all attachments of MR with Bid to ensure compliance.	
2.	Bidder shall provide Manufacturer's complete descriptive and illustrative catalogue / literature with offer, for reference.	
3.	Bidder to confirm that all the requirements and associated Notes mentioned in the VMS sheets are properly understood & confirm compliance to the same.	
4.	Bidder to note that all ball valves of this MR shall be of TOP ENTRY type.	
5.	Bidder shall provide details of how the cavity relief arrangement shall be provided in offered cryogenic ball valves.	
6.	Bidder shall provide Detailed dimensioned cross section drawing with parts / material lists, weight etc. with offer, for reference.	
7.	Bidder shall ensure & certify the suitability of items for the intended service conditions.	
8.	Bidder to note that face to face/ end to end dimensions of butterfly valves/ ball valves (as applicable) which shall be as per Manufacturer standard as specified in valve material specification sheet, shall be provided by bidders in offer stage itself. Bidder to ensure the availability of the same in offers.	
9.	Bidder must provide following documents with Bid. In absence of same, Bidder's offer shall be liable for rejection. Duly filled Experience Record Pro-forma (ERP) as specified in document No. B862-000-16-43-ERP-3138 REV.0 & Documentation as per Qualification criteria.	
10.	Bidder to clearly highlight/list any deviation from the MR requirements, on separate sheet and same shall be listed clause-wise. General remarks like "Refer our Offer" for deviations shall not be acceptable. In case, no deviation is provided separately, it shall be construed that offer is strictly in line with MR requirements.	

Copyright EIL – All rights reserved

इंजीनियर्स इंडिया लिमिटेड (भारत सरकार का उपक्रम) ENGINEERS INDIA LIMITED (A Govt. of India Undertaking)		PROJECT: PDH-PP PLANT						Document No. A862-000-16-43-DS-3138 Rev. No. A
		JOB NO.: B862						
		CLIENT: PETRONET LNG LTD.		18.11.2025	A	AG	AAB	PPSW
			NO	DATE	REV	BY	CHK.	APPD.

DATA SHEET FOR SPECIAL SERVICE CONDITIONS FOR BUTTERFLY VALVE

MR No.	Item S. No. In MR	Line Number	Size (Inch)	Quantity	Service	Max^{m} Velocity (m/s)	Density kg/ m^3	Temperature ^{0}C	Pressure kg/cm^{2}g	Remarks
3138	**53**	30"-P-101-23205-A40A-IC	30"	2	Propane (Vapor)	35.5	7.3	120	16.5 /FV	
3138	**54**	54"-FL-208-1401-A22K-	54"	2	Methane/ Ethane/ Propane (Vapor)	52	2	(-)196 / (+) 170	3.5	
3138	**55**	32"-P-101-25301-B54K-IC	32"	6	Reactor Effluent - hydrocarbon (Vapor & Liquid)	0.566-8.35	liq density : 556-650 vap density : 1.4-7.5	(-)196 / (+) 120	17/FV	
3138	**56**	30"-NG-101-26003-E62A-SC	30"	2	RLNG (Vapour)	4.24	102.5	(-)10 / (+) 65	134.5	
3138	**57**	30"-NG-101-25203-E44K-SC	30"	2	RLNG (Vapour)	3.75	168	(-)196 / (+) 65	134.5	

Signature Not Verified

Digitally signed by VENKATA SANTOSH RAVI TEJ MATCHYAPURI
Date: 2026.03.18 18:13:17 IST
Location: eProcure-EPROC

Copyrights EIL - All rights reserved