

OISD - GDN - 192

**FOR RESTRICTED
CIRCULATION ONLY**

SAFETY PRACTICES DURING CONSTRUCTION

OISD-GDN-192

Second Edition, April, 2016

First Edition, July, 2000



Oil Industry Safety Directorate

Government of India

Ministry of Petroleum & Natural Gas

8th Floor, OIDB Bhavan, Plot No. 2, Sector – 73, Noida – 201301 (U.P.)

Website: www.oisd.gov.in

Tele: 0120-2593800, Fax: 0120-2593802

OISD - GDN - 192

Second Edition, April, 2016

First Edition, July, 2000

**FOR RESTRICTED
CIRCULATION ONLY**

SAFETY PRACTICES DURING CONSTRUCTION

Prepared by

**COMMITTEE ON
SAFETY PRACTICES DURING CONSTRUCTION**

Oil Industry Safety Directorate

Government of India

Ministry of Petroleum & Natural Gas

8th Floor, OIDB Bhavan, Plot No. 2, Sector – 73, Noida – 201301 (U.P.)

Website: www.oisd.gov.in

Tele: 0120-2593800, Fax: 0120-2593802

Preamble

Indian petroleum industry is the energy lifeline of the nation and its continuous performance is essential for sovereignty and prosperity of the country. As the industry essentially deals with inherently inflammable substances throughout its value chain – upstream, midstream and downstream – Safety is of paramount importance to this industry as only safe performance at all times can ensure optimum ROI of these national assets and resources including sustainability.

While statutory organizations were in place all along to oversee safety aspects of Indian petroleum industry, Oil Industry Safety Directorate (OISD) was set up in 1986 Ministry of Petroleum and Natural Gas, Government of India as a knowledge centre for formulation of constantly updated world-scale standards for design, layout and operation of various equipment, facility and activities involved in this industry. Moreover, OISD was also given responsibility of monitoring implementation status of these standards through safety audits.

In more than 25 years of its existence, OISD has developed a rigorous, multi-layer, iterative and participative process of development of standards – starting with research by in-house experts and iterating through seeking & validating inputs from all stake-holders – operators, designers, national level knowledge authorities and public at large – with a feedback loop of constant updation based on ground level experience obtained through audits, incident analysis and environment scanning.

The participative process followed in standard formulation has resulted in excellent level of compliance by the industry culminating in a safer environment in the industry. OISD – except in the Upstream Petroleum Sector – is still a regulatory (and not a statutory) body but that has not affected implementation of the OISD standards. It also goes to prove the old adage that self-regulation is the best regulation. The quality and relevance of OISD standards had been further endorsed by their adoption in various statutory rules of the land.

Petroleum industry in India is significantly globalized at present in terms of technology content requiring its operation to keep pace with the relevant world scale standards & practices. This matches the OISD philosophy of continuous improvement keeping pace with the global developments in its target environment. To this end, OISD keeps track of changes through participation as member in large number of International and national level Knowledge Organizations – both in the field of standard development and implementation & monitoring in addition to updation of internal knowledge base through continuous research and application surveillance, thereby ensuring that this OISD Standard, along with all other extant ones, remains relevant, updated and effective on a real time basis in the applicable areas.

Together we strive to achieve NIL incidents in the entire Hydrocarbon Value Chain. This, besides other issues, calls for total engagement from all levels of the stake holder organizations, which we, at OISD, fervently look forward to.

Jai Hind!!!

Executive Director
Oil Industry Safety Directorate

FOREWORD

At the time of development of this document, 113 OISD standards, recommended practices and guidelines are applicable to the Oil and Gas installations of Public sector Oil Companies in India. 11 of these standards have been adopted by Petroleum and Explosives Safety Organisation (PESO) in various rules administered by them and thus the provisions of these standards are mandatory for entire Oil & Gas sector to that extent.

A few serious accidents have occurred in the recent past in India and abroad including vapour cloud explosion and fire at Oil terminal near Jaipur emphasised the need for the industry to review the existing provisions of various guidelines and statutory requirements.

With the above in view the Government of India directed the Oil Industry Safety directorate to develop a comprehensive document covering all the facets of Safety in Design, Operation and Maintenance, of depots and terminals being run by marketing divisions of Oil companies with an objective to strengthen the existing system.

The present guideline on "Safety Practices During Construction" has been prepared by the functional committee based on, existing standards, guidelines & recommended practices of OISD, the recommendations arising out of recent major accidents and their analysis, the accumulated knowledge and experience of industry members in India and updation of National and International codes and practices.

The provisions of this document, if implemented objectively, may go a long way in enhancing overall safety standard and reduce accidents in Oil Installations.

Users are cautioned that no standard can be substitute to the "judgment and experience of Engineers"

This document will be reviewed periodically for improvements based on the new experiences and better understanding. Suggestions are also invited from the users after it is put into practice to improve the document further. Suggestions may be addressed to:

The Co-ordinator
Committee on "Safety Practices during Construction"
Oil Industry Safety Directorate

Government of India
Ministry of Petroleum & Natural Gas
8th Floor, OI DB Bhavan, Plot No. 2, Sector – 73, Noida – 201301 (U.P.)

Website: www.oisd.gov.in

Tele: 0120-2593800, Fax: 0120-2593802

This document in no way supersedes the statutory regulations of Chief Controller of Explosives (CCE), Factory Inspectorate or any other statutory body, which must be followed as applicable.

NOTE

Oil Industry Safety Directorate (OISD) publications are prepared for use in the Oil and Gas Industry under Ministry of Petroleum & natural Gas. These are the property of Ministry of Petroleum & Natural Gas and shall not be reproduced or copied and loaned or exhibited to others without written consent from OISD.

Though every effort has been made to assure the accuracy and reliability of the data contained in these documents, OISD hereby expressly disclaims any liability or responsibility for loss or damage resulting from their use.

These documents are intended to supplement rather than replace the prevailing statutory requirements.

SECOND FUNCTIONAL COMMITTEE ON CONTRACTOR SAFETY**LIST OF MEMBERS**

Name	Organization	Status
<u>S/Shri</u>		
A K Gupta	DGM (HSE), IOCL	Leader
Dharmvir	Addl. Director, OISD	Member Coordinator
Ashok Dashputre	Vice President, RIL	Member
P K Agarwal	CM (HSE), IOCL	Member
D Jana	AGM-Construction, EIL	Member
Udoay Payyadi	Sr. Manager-Maintenance, HPCL	Member
Vijay Mohan	Addl. Director, CHT	Member
B K Rabha	Dy. CE(Instrumentation), OIL	Member
Sankar Raman V	CM-E&C, BPCL - Kochi Refineries Ltd.	Member
Yogesh J Nakhare	Manager-F&S, HPCL.	Member
Pushp Khetarpal	Sr. Vice President (O&M), Petronet LNG	Member
Upinder Kumar	Petronet LNG	Member
A K Arora	Addl. Director, OISD	Member

In addition to the above, several other experts from Industry contributed in the preparation, review and finalisation of this Guideline.


**FIRST FUNCTIONAL COMMITTEE ON
SAFETY PRACTICES DURING CONSTRUCTION**

NAME	ORGANISATION
LEADER	
Shri A.K. Tandon	EIL, New Delhi.
MEMBERS	
1. Shri U.M. Rao	GAIL, Noida.
2. Shri K.N. Ravindran	CRL, Cochin
3. Shri P.K. Anand	ONGC, Mumbai.
4. Shri H.N. Das	ONGCL, Nazaria.
5. Shri Jagnandan Tyagi	IOC(PL) Nodia.
6. Shri M.C Lohar	IBP Co. Ltd., Calcutta.
7. Shri J.C. Agrawal	IOC, Mktg, New Delhi.
8. Shri S.M. Ghotavadekar	HPCL, Mumbai.
9. Shri Sanjoy Ghose	BPCL, Mumbai.
10. Shri H. C Jha "Hari"	IOC-Panipat Refinery.
11. Shri Suhas Kate	HPCL, Visakh.
Member-Coordinator	
Shri A.K. Ranjan	OISD, New Delhi

CONTENTS

SECTION	Page No.
1.0 Introduction	1
2.0 Scope	1
3.0 Definitions	1
4.0 General Duties	2
4.1 General Duties Of Execution Agencies	2
4.2 General Duties Of Owners	4
5.0 Safety Practices At Work Places	4
5.1 General Provisions	4
5.2 Means Of Access And Egress	5
5.3 Housekeeping	5
5.4 Precautions against The Fall Of Materials and Persons and Collapse Of Structures	6
5.5 Prevention Of Unauthorised Entry	6
5.6 Fire Prevention And Fire Fighting	6
5.7 Lighting	7
5.8 Plant, Machinery, Equipment and Hand Tools	7
6.0 Construction Activities	9
6.1 Excavation	10
6.2 Scaffolding, Platforms & Ladders	12
6.3 Structural Work, Laying of Reinforcement & Concreting	22
6.4 Road Work	26
6.5 Cutting/Welding	27
6.6 Working in Confined Spaces	29
6.7 Proof / Pressure Testing	31
6.8 Working at Heights	31
6.9 Handling and Lifting Equipment	34

6.10	Vehicle Movement	39
6.11	Electrical	40
6.12	Offshore	43
6.13	Demolition	48
6.14	Radiography	49
6.15	Sand/Shot Blasting / Spray Painting	50
6.16	Work above Water	51
7.0	Additional Safety Precaution for Units with Hydrocarbons	52
8.0	Environment Protection	53
9.0	Occupational Health	55
10.0	Documentation	56
11.0	Safety Awareness & Training	56
12.0	References	57
	Annexure I	58

	OISD – GDN – 192	Page No. 1
	SAFETY PRACTICES DURING CONSTRUCTION	

SAFETY PRACTICES DURING CONSTRUCTION

1.0 INTRODUCTION

Safety in Construction Management deserves utmost attention especially in the hydrocarbon industry, such as Exploration, Refineries, Pipelines and Marketing installations, Gas Processing units etc. Construction is widely recognised as one of the accident prone activities. Most of the accidents are caused by inadequate planning, failure during the construction process and/or because of design deficiencies. Besides property loss, accidents also result in injuries and fatalities to the personnel, damage to environment which needs to be prevented.

The reasons for accidents during construction activities are related to unique nature of the industry, human behaviour, difficult work-site conditions, extended odd duty hours, lack of training & awareness and inadequate safety management. Unsafe working methods, lack of proper JSA (Job Safety Analysis) and use of improper / inadequate PPEs, equipment failure and improper housekeeping also tend to increase the accident rate in construction.

Ensuring good quality of materials, equipment and competent supervision along with compliance of standard engineering practices shall go a long way to in built safety into the system.

The objective of this document is to provide practical guidance on technical and educational framework for health, safety and environment in construction with a view to:

- (a) prevent accidents and harmful effects on the health of workers arising from employment in construction;
- (b) ensure appropriate safety during implementation of construction;
- (c) provide safety practice guidelines for appropriate measures of planning, control and enforcement.
- (d) protect environment.


2.0 SCOPE

This document specifies broad guidelines on HEALTH, SAFETY AND ENVIRONMENT practices to be adhered to during construction activities including green field projects in oil industry. However, before commencing any job, specific hazards and its effects should be assessed and necessary corrective/preventive actions should be taken by all concerned. The document is intended only to supplement and not to replace or supersede the prevailing statutory requirements, which shall also be followed as applicable. For Personal Protective Equipment, OISD-STD-155 (Part I&II) shall be referred to. The scope of this document does not include the design aspects and quality checks during construction.

3.0 DEFINITIONS

Definitions of various terminology are given below:

- **Adequate, appropriate or suitable** are used to describe qualitatively or quantitatively the means or method used to protect the men, machinery, material, property and environment.
- **By hand:** The work is done without the help of a mechanised tool.

	OISD – GDN – 192	Page No. 2
	SAFETY PRACTICES DURING CONSTRUCTION	


- **Competent Authority:** A statutory agency having the power to issue regulations, orders or other instructions having the force of law.
- **Competent person:** A person possessing adequate qualifications, such as suitable training and sufficient knowledge, experience and skill for the safe performance of the specific work. The competent authorities may define appropriate criteria for the designation of such persons and may determine the duties to be assigned to them.
- **Construction site:**
A worksite involving new construction, modification or maintenance of existing facility, shutdown related activity, demolition, housekeeping etc.
- **Environment:**
Environment includes water, air and land and the interrelationship which exists among and between water, air and land and human beings, other living creatures, plants, microorganisms and property.
- **Execution agency:**
Any entity / person, having contractual obligation with the owner and who employs one or more workers on a construction site.
- **Hazard:** A condition or a set of conditions which has potential of causing injury to person, damage to property or environment.
- **Health:** Soundness of body covering Physical, Emotional, Psychological and Intellectual conditions of a worker which assists the attainment of the objectives.
- **Means of access or egress:** Passageways, corridors, stairs, platforms, ladders and any other means for entering or leaving the workplace or for escaping in case of danger.
- **Owner:** Any entity / person for whom construction job is carried out.
It shall also include owner's designated representative/ consultant/ nominee/ agent, authorised from time to time to act for and on its behalf for supervising/ coordinating the activities of the execution agency.
- **Scaffold:** Any fixed, suspended or mobile temporary structure supporting workers and material or to gain access to any such structure and which is not a lifting appliance.
- **Safety :** Prevention & protection from exposure to Hazard.
- **Worker:** Any person engaged in construction activity.
- **Workplace:** Owner's designated premises where workers need to be present by virtue of their involvement in the construction activity.

4.0 GENERAL DUTIES


4.1 GENERAL DUTIES OF EXECUTION AGENCIES

4.1.1 Execution agency should:

- i) provide means and organisation to comply with the Health, safety and environment protection measures required at the workplace.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 3</p>
--	--	--

- ii) provide and maintain workplaces, plant, equipment, tools and machinery and organise construction work so that, there is no risk of accident or injury to health of workers. In particular, construction work should be planned, prepared and undertaken so that:
 - (a) dangers liable to arise at the workplace, are prevented;
 - (b) excessively or unnecessarily strenuous work positions and movements are avoided;
 - organisation of work takes into account the safety and health of workers and also environment protection;
 - materials and products used are suitable from Health safety and environment protection point of view;
 - (c) working methods are adopted to safeguard workers against the harmful effects of chemical, physical and biological agents.
- iii) establish committees with representatives of workers and management or make other arrangement for the participation of workers in ensuring safe working conditions.
- iv) arrange for periodic safety inspections by competent persons of all buildings, plant, equipment, tools, machinery, workplaces and review of systems of work, regulations, standards or codes of practice. The competent person should examine and ascertain the safety of construction machinery and equipment.
- v) provide such supervision to ensure that workers perform their work with due regard to safety and health of theirs as well as that of others.
- vi) employ only those workers who are qualified, trained and suited by their age, physique, state of health and skill.
- vii) satisfy themselves that all workers are informed and instructed in the hazards connected with their work and environment and trained in the precautions necessary to avoid accidents and injury to health.
- viii) ensure that buildings, plant, equipment, tools, machinery or workplaces in which a dangerous defect has been found should not be used until the defect has been rectified.
- ix) organise for and remain always prepared to take immediate steps to stop the operation and evacuate workers as appropriate, where there is an imminent danger to the safety of workers.
- x) establish a checking system by which it can be ascertained that all the members of a shift, including operators of mobile equipment, have returned to the camp or base at the close of work on dispersed sites and where small groups of workers operate in isolation.
 - provide appropriate first aid, training and welfare facilities to workers as per various statutes like the Factories Act 1948, Building & Construction Workers Regulation (BOCWR), etc. and, whenever collective measures are not feasible or are insufficient, provide and maintain personal protective equipment and clothing in line with the requirement as per OISD-STD-155 (Part I & II) on Personnel Protective

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 4</p>
--	--	--

Equipment. They should also provide access to workers to occupational health services.

- educate workers about their right and the duty at any workplace to participate in ensuring safe working conditions to the extent of their control over the equipment and methods of work and to express views on working procedures adopted as may affect health, safety and environment.
- xi) ensure that except in an emergency, workers unless duly authorised, should not interfere with, remove, alter or displace any safety device or other appliance furnished for their protection or the protection of others, or interfere with any method or process adopted with a view to avoiding accidents and injury to health.
- xii) ensure that workers do not operate or interfere with plant and equipment that they have not been duly authorised to operate, maintain or use.
- xiii) ensure that workers do not sleep, rest or cook etc in dangerous places such as scaffolds, railway tracks, garages, confined spaces or in the vicinity of fires, dangerous or toxic substances, machines or vehicles and heavy equipment etc.
- xiv) obtain the necessary clearance/permits as required and specified by owner.
Arrangement for drinking water, toilet facilities, a creche and transport arrangement etc. to be provided as per statutory requirement.
- xv) deploy a safety officer at site as per the requirement of Factory Act 1948/ Building & Construction Workers Regulation (BOCWR)/ Criticality of the job.
- xvi) ensure that all employees/workmen undergo medical examination as required under the law or under the contract provision and keep a record of the same.
- xvii) obtain the police verification of the workers/ supervisors arranged by him and the same is to be submitted to the owner.
- xviii) not permit any employee/workmen/visitor to enter the work area under the influence of alcohol or any drugs.

4.2 GENERAL DUTIES OF OWNERS


4.2.1 Owners should:

- i) co-ordinate or nominate a competent person to co-ordinate all activities relating to HEALTH, SAFETY AND ENVIRONMENT on their construction projects;
- ii) inform all contractors on the work site / project of special risks to HEALTH, SAFETY AND ENVIRONMENT;
- iii) ensure that executing agency is aware of the owner's requirements and the executing agency's responsibilities with respect to HEALTH, SAFETY AND ENVIRONMENT practices before starting the job.

5.0 SAFETY PRACTICES AT WORK PLACES

5.1. GENERAL PROVISIONS

"OISD hereby expressly disclaims any liability or responsibility for loss or damage resulting from the use of OISD Standards/Guidelines."

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 5</p>
--	--	--


- 5.1.1 All openings and other areas likely to pose danger to workers should be clearly indicated and accident prevention measures taken as required. The working area should be clearly de-marketed to keep the workers in that area only.
- 5.1.2 Workers & Supervisors should use the safety helmet and other requisite Personal Protective Equipment according to job & site requirement as per OISD-STD-155 (Part I & II). They should be trained to use personal protective equipment including their limitations.
- 5.1.3 Never use-solvents, alkalis and other oils to clean the skin.
- 5.1.4 Lift the load with back straight and knees bent. The contractor shall ensure at his construction site, no worker lifts by hand or carries overhead or over his back or shoulders any material, article, tool or pipelines exceeding in weight as per The Factory Act 1948 / Rule 38 of Building & Construction Workers Regulation (BOCWR), unless aided by another worker or device.
- 5.1.5 Ensure the usage of correct and tested tools and tackles. Don't allow the make shift tools and tackles. Also the tools should be suitable for a particular job and rated accordingly.
- 5.1.6 No loose clothing should be allowed while at construction site.
- 5.1.7 Start work only after proper authorization viz Work permit etc.
- 5.1.8 Job safety analysis to be done for all critical works.
- 5.1.9 Hydra should not be used for transportation of hook loaded materials.
- 5.1.10 Rope ladders should not be used at construction sites.

5.2 MEANS OF ACCESS AND EGRESS

Adequate and safe means of access (atleast two, differently located) to and egress from all workplaces should be provided. Same should be displayed and maintained. Escape routes should be marked prominently in workers friendly language. The escape routes should not be blocked at any point of time and same to be made understand to the workers.

5.3 HOUSEKEEPING

- 5.3.1 General Housekeeping shall be carried out by the contractor and he will ensure;
 - i) proper storage of materials and equipment;
 - ii) removal of scrap, inflammable material, waste and debris at appropriate intervals including slippery materials. (construction sand on road, oil/ lubricants, resins, etc.).
 - iii) to provide containers for segregation of disposal of debris at required places and regular cleaning of the same.
- 5.3.2 Removal of loose materials, which are not required for use, to be ensured. Accumulation of these at the site can obstruct means of access to and egress from workplaces and passageways.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 6</p>
--	--	--

5.3.3 Workplaces and passageways, that are slippery owing to oil, grease or other causes, should be cleaned up or strewn with sand, sawdust, ash etc.

5.3.4 All surplus earth and debris are removed/disposed off from the working areas to officially designated dumpsites. The debris like plastics, packing material, rubber items should not be allowed to burn. Trucks carrying sand, earth and any pulverized materials etc. in order to avoid dust or odour impact, shall be covered while moving.

5.4 PRECAUTIONS AGAINST THE FALL OF MATERIALS & PERSONS AND COLLAPSE OF STRUCTURES

5.4.1 Precautions should be taken such as the provision of fencing, look-out men or barriers to protect any person against injury by the fall of materials, or tools or equipment being raised or lowered.

5.4.2 Where necessary to prevent danger, guys, stays or supports should be used or other effective precautions should be taken to prevent the collapse of structures or parts of structures that are being erected, maintained, repaired, dismantled or demolished.

5.4.3 All openings through which workers are liable to fall should be kept effectively covered or fenced and displayed prominently.

5.4.4 SOP of crane operation should be adhered to. The crane jacks/legs should be parked on compacted surface to avoid tilting.

5.5 PREVENTION OF UNAUTHORISED ENTRY

5.5.1 Construction sites located in built-up areas and alongside vehicular and pedestrian traffic routes should be fenced to prevent the entry of unauthorised persons.


5.5.2 Visitors should not be allowed access to site(s) unless accompanied by or authorised by a competent person. All authorized visitors should report at the site office. Contractor shall provide visitor's helmet (helmet with visitor sticker) and other PPEs like Safety Shoe, reflective jacket, respiratory protection etc. as per requirement of the site. All the workers to have photo IDs including the staff of vehicles used in the job.

5.6 FIRE PREVENTION AND FIRE FIGHTING

5.6.1 All necessary measures should be taken by the executing agency and owner to:

- i) avoid the risk of fire;
- ii) control quickly and efficiently any outbreak of fire;
- iii) bring out a quick and safe evacuation of persons.
- iv) Inform unit/fire station control room, where construction work is carried out within existing operating area.
- v) DMP should be in place for the same.

5.6.2 Combustible materials such as packing materials, sawdust, greasy/oily waste and scrap wood or plastics should not be allowed to accumulate in workplaces but should be kept in closed metal containers in a safe place. To be disposed periodically away from site at designated place and assigned manner.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 7</p>
--	--	--

- 5.6.3 Places where workers are employed on works prone to danger of fire should be provided with:
- i) suitable and sufficient fire-extinguishing equipment, which should be easily visible and accessible;
 - ii) an adequate water supply at sufficient pressure meeting the requirements of various OISD standards.
 - iii) required PPEs.
- 5.6.4 To guard against danger at places having combustible material, workers should be trained in the action to be taken in the event of fire, including the use of means of escape.
- 5.6.5 At sites having combustible material, suitable visual sign boards should be provided to indicate clearly the direction of escape in case of fire.
- 5.6.6 Means of escape should be kept clear at all times. Escape routes should be frequently inspected and if possible marked in fluorescent colours particularly in high structures and where access is restricted.


5.7 LIGHTING

- 5.7.1 Where natural lighting is not adequate, working light fittings or portable hand-lamps should be provided at workplace on the construction site where a worker will do a job.
- 5.7.2 Emergency lighting should be provided for personnel safety during night time to facilitate standby lighting source, if normal system fails.
- 5.7.2 Artificial lighting should not produce glare or disturbing shadows.
- 5.7.3 Lamps should be protected by guards against accidental breakage.
- 5.7.4 The cables of portable electrical lighting equipment should be of adequate size & characteristics for the power requirements and of adequate mechanical strength to withstand severe conditions in construction operations.
- 5.7.5 For temporary lighting connection, mostly neutral and phases are connected and insulation tapes are provided. It is better to stagger the neutral and phase connection so that even if the tape gets removed from the joints, there will be no short circuit/ spark between neutral and phase due to staggering of neutral and phase.
- 5.7.6 All the temporary lighting/ machine connections are to be provided from a three core cable for better safety.

5.8 PLANT, MACHINERY, EQUIPMENT AND HAND TOOLS

5.8.1 General Provisions

- i) Plant, machinery and equipment including hand tools, both manual and power driven, should:
 - a) be of proper design and construction, taking into account health, Safety and ergonomic principles.
 - b) be maintained in good working order;
 - c) be used only for work for which they have been designed.
 - d) be operated only by workers who have been authorised and given appropriate training.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 8</p>
--	--	--


- e) be provided with protective guards, shields or other devices as required.
- ii) Adequate instructions for safe use should be provided.
- iii) Standard operating procedures should be established and used for all plant, machinery and equipment.
- iv) Operators of plant, machinery and equipment should not be distracted while work is in progress.
- v) Plant, machinery and equipment should be switched off when not in use and isolated before any adjustment, clearing or maintenance is done.
- vi) Where trailing cables or hose pipes are used they should be kept as short as practicable and not allowed to create a hazard.
- vii) All moving parts of machinery and equipment should be enclosed or adequately guarded.
- viii) Every power-driven machine and equipment should be provided with adequate means, immediately accessible and readily identifiable to the operator, of stopping it quickly and preventing it from being started again inadvertently.
- ix) Operators of plant, machinery, equipment and tools should be provided with PPEs, including where necessary, suitable ear protection.

5.8.2 Hand tools

- i) Hand tools should be repaired by competent persons.
- ii) Heads of hammers and other shock tools should be dressed or ground to a suitable radius on the edge as soon as they begin to mushroom or crack.
- iii) When not in use and while being carried or transported, sharp tools should be kept in sheaths, shields, chests or other suitable containers.
- iv) Only insulated or non-conducting tools should be used on or near live electrical installations.
- v) Only non-sparking tools should be used near or in the presence of flammable or explosive dusts or vapours.

5.8.3 Pneumatic Tools

- i) Operating triggers on portable pneumatic tools should be:
 - a) so placed as to minimise the risk of accidental starting of the machine.
 - b) so arranged as to close the air inlet valve automatically when the pressure of the operator's hand is removed.
- ii) Hose and hose connections for compressed air supply to portable pneumatic tools should be:

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 9</p>
--	--	--

- a) designed and tested for the pressure and service for which they are intended;
- b) fastened securely on the pipe outlet and equipped with the safety chain, as appropriate.
- iii) Pneumatic shock tools should be equipped with safety clips or retainers to prevent dies and tools from being accidentally expelled from the barrel.
- iv) Pneumatic tools should be disconnected from power and the pressure in hose lines released before any adjustment or repair is made.

5.8.4 Electrical Tools

- i) Low voltage portable electrical tools should generally be used.
- ii) All electrical tools should be earthed, unless they are "all insulated" or "double insulated" tools which do not require earthing.
- iii) All electrical tools should get inspected and maintained on a regular basis by a competent electrician and complete records kept.
- iv) No temporary connected appliance should be left connected in the socket. Its plug should be immediately removed after use.


5.8.5 Engines

- i) Engines should:
 - a) be installed so that they can be started safely and the maximum safe speed cannot be exceeded.
 - b) have controls for limiting speed.
 - c) have devices to stop them from a safe place in an emergency.
 - d) have their batteries top covered with insulating material.
 - e) have radiator fan covers in place.
- ii) IC engines should not be run in confined spaces unless adequate exhaust ventilation is provided or the exhaust should be installed outside the confined place at suitable height.
- iii) When IC engines are being fuelled:
 - a) the engine should be shut off.
 - b) care should be taken to avoid spilling fuel.
 - c) no person should smoke or have an naked light in the vicinity.
 - d) a fire extinguisher should be kept readily available.
- iv) Secondary fuel reservoir should be placed outside the engine room.

6.0 CONSTRUCTION ACTIVITIES

The various common activities in construction are as under:

- Excavation
- Scaffolding, Platforms & Ladders
- Structural Work, Laying of Reinforcement & Concreting
- Road Work (Laying of roads)
- Cutting /Welding
- Working in Confined Space

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 10</p>
--	--	---

- Proof/Pressure Testing
- Working at Heights
- Handling & Lifting Equipment
- Vehicle Movement
- Electrical
- Offshore
- Demolition
- Radiography
- Shot blasting/ spray painting
- Work above water

Work permit system as per requirement of OISD-STD-105 shall be followed for various construction activities. As regards the activities at work places including grass root project sites if not covered under OISD-STD-105, owner shall develop a suitable methodology for execution of various construction activities under work permit system for safe execution of the works.

The safe practices to be followed during the implementation of above construction activities are given below:

6.1 EXCAVATION

6.1.1 All excavation work should be planned and the method of excavation and the type of support work required should be decided considering the following:


- i) the stability of the ground including the chances of seepage of water;
- ii) the excavation will not affect adjoining buildings, structures or roadways;
- iii) to prevent hazard, the Hydrocarbon lines, water, electrical and other above ground & underground public utilities should be shut off, re-routed or disconnected, if necessary; If such a presence is envisaged, clearance to be taken from respective competent authority/ person.
- iv) the position of culvert/bridges, temporary roads and spoil heaps should be determined;
- v) a signed rough sketch of the excavation site to be prepared and made the workers understand

6.1.2 Before digging begins on site, all excavation work should be planned and the method of excavation and the type of support work required should be decided based on good engineering practices and recorded.


6.1.3 All excavation work should be supervised by a competent person.

6.1.4 Sites of excavations should be thoroughly inspected:

- i) daily, prior to each shift and after interruption in work of more than one day;
- ii) after every blasting operation;
- iii) after an unexpected fall of ground;
- iv) after substantial damage to supports;
- v) after a heavy rain, frost or snow;
- vi) when boulder formations are encountered.
- vii) for cracks in the nearby buildings or area as the excavation progresses and the same to be reviewed.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 11</p>
--	--	---

- 6.1.5 Safe angle of repose while excavating trenches exceeding 1.5m depth upto 3.0m should be maintained. Based on site conditions, provide proper slope, usually 45⁰, and suitable bench of 0.5m width at every 1.5m depth of excavation in all soils except hard rock or provide proper shoring and strutting to prevent cave-in or slides.
- 6.1.6 As far as possible, excavated earth should not be placed within one meter of the edge of the trench or depth of trench whichever is greater.
- 6.1.7 Don't allow vehicles to operate too close to excavated area. Maintain atleast 2m distance from edge of excavation or depth of trench whichever is greater. No load, plant or equipment should be placed or moved near the edge of any excavation where it is likely to cause its collapse and thereby endanger any person unless precautions such as the provision of shoring or piling are taken to prevent the sides from collapsing.
- 6.1.8 Adequately anchored stop blocks and barriers should be provided to prevent vehicles being driven into the excavation. Heavy vehicles should not be allowed near the excavation unless the support work has been specially designed to permit it.
- 6.1.9 If an excavation is likely to affect the stability of a structure on which persons are working, precautions should be taken to protect the structure from collapse.
- 6.1.10 Barricade at 1m height (with red & white band/self glowing caution board) should be provided for excavations beyond 1.0 m depth. Provide two entries/exits for such excavation through proper means. Lighting arrangements to be made to avoid any accidental fall in the excavated portion even when work is not in progress.
- 6.1.11 Necessary precautions should be taken for underground utility lines like cables, sewers etc. and necessary approvals/clearances from the concerned authorities shall be obtained before commencement of the excavation job.
- 6.1.12 Water shall be pumped/ bailed out, if any accumulates in the trench. Necessary precautions should be taken to prevent entry of surface water in trenches.
- 6.1.13 During / after rains, the soil becomes loose. Take additional precaution against collapse of side wall. During rains excavation should be avoided.
- 6.1.14 In hazardous areas, air should be tested to ascertain its quality. No one should be allowed entry till it is suitable for breathing.
- 6.1.15 In case of mechanised excavation, precaution shall be taken to not to allow anybody to come within one meter of extreme reach of the mechanical shovel. This area of reach of mechanical shovel should be marked / barricaded suitably. The mechanised excavator shall be operated by a well-trained experienced operator. When not in operation, the machine shall be kept on firm leveled ground with mechanical shovel resting on ground. Wheel or belt shall be suitably jammed to prevent any accidental movement of the machine. Suitable precautions as per manufacturer guidelines should be taken for dozers, graders and other heavy machines.
- 6.1.16 In case of blasting, follow strictly IS:4081-1986 & Indian Explosive Act and rules for storage, handling and carrying of explosive materials and execution of blasting operation.

	OISD – GDN – 192	Page No. 12
	SAFETY PRACTICES DURING CONSTRUCTION	

6.2 SCAFFOLDING, PLATFORMS & LADDERS

System of tagging shall be followed to indicate status of 'Fit-for-Purpose' certification by a competent person for the scaffoldings. Green Tag shall indicate 'Fit-for-Purpose' whereas Red Tag shall indicate 'Unfit-for-purpose'. Accordingly only Red Tag shall be displayed during Erection & Dismantling.

All personnel engaged in erecting, using, dismantling scaffolds shall use full body safety harness with double lanyard with shock absorber connected with personal fall arrestor which should be secured to a properly designed anchor.

6.2.1 Scaffold related guidelines

General Requirements

Categories and Classification

Most scaffolds fall into one of the four primary categories:

- Tube and coupler scaffold
- System scaffolds e.g. Cup lock, Ring lock, H frame scaffold
- Suspension(or Suspended) scaffold
- Mobile scaffold
- Special scaffold


Scaffolds are classified according to their intended use as:


- Light duty
- Medium duty (General Purpose)
- Heavy duty

Type of Scaffolding	Load duty	Light		Medium	Heavy/Special		
	Maximum Safe load in Kg/m ²	75	150	225	300	450	600
Tubular with clamps	Max. bay length (distance between two verticals) in Meter	2.7	2.2	1.8	1.4	1.0	0.8
Cup / Ring lock		2.5	2.0	1.5	1.25	1.0	NA

Conditions where special scaffolding procedure is required:

1. Height of the scaffolding is more than 30 meters.
2. Scaffolding is special in nature/ type: cantilever more than 1.5 meters, bridge more than 4 meters, scaffolding for machine/ equipment maintenance requiring frequent modifications, offshore scaffold, hanging scaffold; wooden scaffold (for specific use e.g. cooling tower), etc.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 13</p>
--	--	---

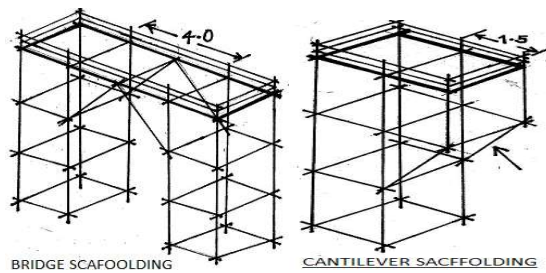


For all such cases, but not limited to, in addition to checklist, a plant specific procedure cum checklist based on additional risk is to be prepared & validated by a competent person (example: procedure for erection/ dismantling shall be prepared and followed. If need felt, help from Engineering Cell/Third Party may be taken for checking proposed scaffold in respect of design and load carrying capacity etc.).

Specifications of Scaffolds

Applicable to all Scaffolds


1. All elevated structures/ working platform areas should be guarded on all sides.
2. Railings and toe boards should be provided on the platform.
3. Scaffolds shall be designed to support at least 4 times the anticipated weight of Men, material and wind force.
4. Make certain that all scaffolds are in plumb and level at all times.
5. Scaffolds shall be secured from tipping when the scaffold height exceeds four times its minimum base dimension.
6. Scaffolds must be constructed at least **3** planks wide unless location makes this physically impossible.
7. Landing platform should be provided at every 9 meter of height or less.
8. The members of scaffolds should extend at least 6" on either ends but not more than 12". They should be fastened on both ends and laid tight by clamps.
9. All scaffoldings having height to base ratio more than 4 shall be secured firmly with permanent structure in X and Y direction at least every 6 meters.
10. Scaffold which spread to 20 meter or more should have two accesses preferably opposite side.

	OISD – GDN – 192 SAFETY PRACTICES DURING CONSTRUCTION	Page No. 14
--	--	-------------

11. Plastic Checklist holder with red marked to be used as a “Not Fit-for-Purpose” warning signboard and Green colour combined checklist to be used as “Fit-for-Purpose” signboard.
12. Keep distance of at least 150mm between high temp Pipelines or equipment and scaffolding.
13. Safe distance from overhead electrical lines to be maintained as per Site electrical safety procedures.

Applicable to Tube-and-coupler scaffold

1. Tube and coupler scaffolds over 30 meter in height must be Designed by a competent professional engineer (who by extensive knowledge, training, and experience have successfully demonstrated his ability to carry out scaffold design and load calculations).
2. Maximum height of first horizontal member (Ledger) of scaffolds from the Ground shall be 2.2 meters. Lower lift can be considered for heavy loads depending upon the scaffold design. When scaffold is more than 6 meter height for carrying heavy load, kicker lift should be provided at a height of 150mm from ground.
3. The top rail shall be at height of 900-1200 mm and Mid rails must be installed approximately halfway between the top rail and the platform surface. Toe boards (150mm) should be securely attached to the working platform. Toe boards are generally applicable to working platform and not for landing platforms.
4. The bay length & width depends on the height and the load to be carried by the scaffold.
5. Bracings shall be fitted up to full height of scaffold.
6. Standards should be joined having overlap of min 600 mm using three equally spaced swivel clamps or end to end using sleeve/pin type coupler.
7. Ledgers should be joined having overlap of min 600 mm using three equally spaced swivel clamps or end to end using sleeve coupler.
8. Base plate 150 x 150 x 6mm shall be used to support all vertical pipes of Scaffolds.
9. Sole plate shall be used at all unpaved area to support base late.
10. Scaffolding platform Grating shall be tied with clamp at both ends, and scaffolding platform Grating shall not overhang more than 150 mm and shall be at least 150 mm away from hot surface.
11. Every scaffold shall be provided with certified ladder and extending its free end shall be above platform by 1000 mm/ four rungs.

	OISD – GDN – 192 SAFETY PRACTICES DURING CONSTRUCTION	Page No. 15
--	--	-------------

Applicable to Mobile scaffolds


1. Attach castors with plain stems to the panel or adjustment screw by pins or other suitable means.
2. Apply castor brakes/lock at all times when scaffolding is not being moved.
3. Do not ride rolling scaffoldings.
4. Remove all material and equipment from platform before moving scaffolding.
5. Do not try to move rolling scaffolding without sufficient help. Watch out for holes protrusions in the floor and for overhead obstructions.
6. Do not use brackets on rolling scaffoldings without first considering the overturning effect.

Design Criteria

- All types of scaffolds shall be strong enough of carrying and transmitting all types of loads to the ground. All scaffolds shall be adequately secured, stiffened, both longitudinally and transversely.
- Scaffolding determines as per the requirement and use of scaffold such as:
 - Purpose of scaffolding
 - Loading on scaffold platform
 - Required height
 - Sufficient work place
 - Surrounding environment

Storage and inspection of materials

- All scaffolding material shall be stored at designated location to protect them from adverse environment conditions such as corrosion, weather.
- Storage racks/ Locations/ areas shall be clearly identified.
- Storage facility of scaffold material shall be properly constructed for its stability and load bearing capability.
- Steel pipes and scaffolding platform Grating shall be stacked horizontally according to length. Fittings, Couplers shall be stored in separate bins.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 16</p>
--	--	---

- Defective material shall be removed from site.
- Scaffolding material such as tubular, planks, clamps etc. shall be inspected annually for contractor owned material by contractor. The visual inspection shall cover 100% scaffold materials.


Transportation and handling of scaffolding material

- Make sure that scaffold pipe shifting done in vehicle of appropriate length.
- Special safety care to be taken while shifting or lifting pipes manually.
- Rope and pulley should be used to lift pipe from height.

Safety requirements

A risk assessment to access scaffold hazards through inspection and work method statement for relevant work activities shall be made before erecting, dismantling, moving, or modifying scaffold. Examples of hazards to be considered include the following:

- Working at/from heights.
- The presence of nearby electrical lines or process equipment (e.g. hot line, vents, drains, etc.). Necessary safety distances shall be maintained as specified in site level electrical safety procedure.
- Possible emergency scenario, escape routes and responses.
- The condition and loading of working surfaces /platform /scaffold pipes and other components or loose material such as clamps/ bolts on the working platforms.
- The presence and activity of other people and equipment in the vicinity of the work.
- The weather (Heavy rain, high wind velocity-more than 20 knots, etc).
- Erection during dark hours.
- Scaffold collapse.
- Manual task (Manual Material Handling).
- Access and egress during normal and emergency condition.
- The effect of heavy equipment movement in close vicinity such as within 4 meters to be considered for direct hit and sagging of land in case of unpaved area.

	OISD – GDN – 192	Page No. 17
	SAFETY PRACTICES DURING CONSTRUCTION	

This assessment is a part of the work permit process but should also be extended to the specific job planning of the crew performing the work. Appropriate actions shall be taken to mitigate the hazards identified during the assessment.

Fall protection when erecting, dismantling, and modifying scaffolds shall be under the direction of a competent person (Scaffold Supervisor). Scaffold erectors (Scaffolder) shall use personal fall-protection systems that provide continuous fall protection while erecting, dismantling or modifying scaffolds unless the determination is made by a competent person that fall protection is not feasible or it creates a greater hazard. Fall protection can be accomplished through the use of adequate anchorages that are independent of the scaffold or by using scaffold systems and components that are approved by the manufacturer as adequate anchorages. Employees/workmen shall use appropriate fall-arrest equipment.

The footing for supported scaffolds shall be sound, rigid, and capable of supporting the maximum intended load, including the weight of the scaffold.

Scaffold platform grating shall be fastened on both ends and laid tight by scaffold clamps/couplers.

Manufacturer's guidelines for proprietary scaffolds (e.g. Cup lock, ring lock, H frame, Insulating modular scaffolds) shall be followed unless a competent person approves the variance and provided the variance complies with applicable regulations and generally accepted scaffold engineering practices.

Proprietary/special scaffold manufacturer's guidelines for erection and inspection should be available with users, and with plant maintenance engineer for reference.

The following safe practices with respect to scaffolds shall be followed:

- There shall be firm foundation for all scaffoldings. All scaffolding shall be made of sound material. Scaffolding material shall be inspected and used, only if found in good condition. Avoid using equipment whose strength is not known.
- Provide adequate Base for scaffolding posts. Metal base plate is used under all upright or standard scaffoldings. Correct type of couplers shall be used for all connections. Use right angle couplers for joining vertical to horizontal members and swivel type couplers for joining bracing with ledgers. For joining vertical load bearing members (standards), "joint pin" type couplers can also be used. The couplers shall be of a structural metal, such as drop-forged steel, malleable iron, or structural grade aluminum (use of gray cast iron is prohibited).
- Plumb and level scaffoldings as erection proceeds, so that braces will fit without forcing. Fasten all braces securely.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 18</p>
--	--	---


- Where scaffoldings are erected above walkways or work areas, the space between toe board and railing should be screened (e.g. Safety net, Metal sheets).
- Whenever work is being done over men who are working on scaffolding, overhead protection should be provided on the scaffolding.
- Restrain free-standing scaffolding towers from tipping by guying or other means.
- A safe and convenient means of access shall be provided to the platform level. Means of access may be a portable ladder, fixed ladder, ramp or runway or stairway. The ladder shall be so installed that there supporting member (pipe) is just below ladder rung. This is to avoid tripping hazard, especially while using the ladder.
- During erection, the ladder shall be installed as early as practicable, but not later than first two horizontal members (Ledgers). This is to facilitate Scaffolder while erecting the scaffold.
- During erection/ dismantling, scaffolder shall use 'T' steps to minimize risk of accidental fall/ slip.
- Ladder should be provided with tie rods/studs at top and bottom rungs and secured to scaffolding with ladder clamps, at least 2 locations for a ladder of length up to 4 m & at 3 locations for more than 4 m long ladder.
- The horizontal member/ ledger on which ladder is to be fixed, must be clamped to two subsequent standard using fixed clamps.
- Do not cantilever or extend putlogs / trusses as side brackets, without thoroughly considering the loads to be applied.
- Do not climb scaffold using cross braces.
- Do not use ladders or makeshift devices on top of scaffoldings to increase the height.
- Have at least 12" overlap and 6" extension beyond centerline of support or cleat at both ends to prevent sliding.
- Do not allow unsupported ends of planking to extend an unsafe distance beyond supports.
- Planks shall be non-greasy and free from defects.
- Access to working platform shall be suitably protected against inadvertent fall by providing swing members/ swing gate or chains.
- When scaffolding is no longer required, request for dismantling of scaffold shall be sent to scaffolding supervisor through work permit.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 19</p>
--	--	---

- Scaffold shall be removed from top bracings. Ties, rackers etc. should not be removed from section lower than the one which is being dismantled.
- Do not throw or allow falling to ground any scaffold member, board or fittings.
- Dismantled scaffold material shall be neatly stacked, away from the site until whole of scaffold has been dismantled.

6.2.2 Metal as material of construction

- i) A scaffold should be provided and maintained or other equally safe and suitable provision should be made where work cannot safely be done on or from the ground or from part of a building or other permanent structure.
- ii) Scaffolds should be provided with safe means of access, such as stairs, ladders or ramps. Ladders should be secured against inadvertent movement.
- iii) Every scaffold should be constructed, erected, properly secured/tied and maintained so as to prevent collapse or accidental displacement during erection, while in use, in idle state or dismantling.
- iv) Every scaffold and part thereof should be constructed :
 - (a) in such a way so as not to cause hazards for workers during erection and dismantling;
 - (b) in such a way so as guard rails and other protective devices, platforms, ladders, stairs or ramps can be easily put together;
 - (c) with sound material and of requisite size and strength for the purpose for which it is to be used and maintained in a proper condition.
- v) Boards and planks used for scaffolds should be protected against splitting.
- vi) Materials used in the construction of scaffolds should be stored under good conditions and apart from any material unsuitable for scaffolds.
- vii) Couplers should not cause deformation in tubes. Couplers should be made of drop forged steel or equivalent material.
- viii) Tubes should be free from cracks, splits and excessive corrosion and be straight to the eye, and tube ends cut cleanly square with the tube axis.
- ix) Scaffolds should be designed for their maximum load as per relevant codes.
- x) Scaffolds should be adequately braced.
- xi) Scaffolds which are not designed to be independent should be rigidly connected to the building at designated vertical and horizontal places.
- xii) A scaffold should never extend above the highest anchorage to an extent which might endanger its stability and strength.

	OISD – GDN – 192	Page No. 20
	SAFETY PRACTICES DURING CONSTRUCTION	


- xiii) Loose bricks, drainpipes, chimney-pots or other unsuitable material should not be used for the construction or support of any part of a scaffold.
- xiv) Scaffolds should be inspected and certified:
 - (a) before being taken into use;
 - (b) at periodic intervals thereafter as prescribed for different types of scaffolds;
 - (c) after any alteration, interruption in use, exposure to weather or seismic conditions or any other occurrence likely to have affected their strength or stability.
- xv) Inspection should more particularly ascertain that:
 - (a) the scaffold is of suitable type and adequate for the job;
 - (b) materials used in its construction are sound and of sufficient strength;
 - (c) it is of sound construction and stable;
 - (d) that the required safeguards are in position.
- xvi) A scaffold should not be erected, substantially altered or dismantled except by or under the supervision.
- xvii) If out-rigger scaffolding is to be used, it should be specifically designed and inspected before putting in use.

6.2.3 Lifting appliances on scaffolds (CHAIN PULLEY BLOCKS, PULLERS)

- i) When a lifting appliance is to be used on a scaffold:
 - (a) the parts of the scaffold should be carefully inspected to determine the additional strengthening and other safety measures required;
 - (b) any movement of the scaffold members should be prevented;
 - (c) if practicable, the uprights should be rigidly connected to a solid part of the building at the place where the lifting appliance is erected.

6.2.4 Prefabricated scaffolds


- i) In the case of prefabricated scaffold systems, the instructions provided by the manufacturers or suppliers should be strictly adhered to. Prefabricated scaffolds should have adequate arrangements for fixing bracing.
- ii) Frames of different types should not be intermingled in a single scaffold.
- iii) Scaffolding shall be erected on firm and level ground. In case of loose or uneven terrain, care should be taken to see that the scaffolding is on firm footing by leveling / compacting or other means.
- iv) All members of metal scaffolding shall be checked periodically to screen out defective / rusted members. All joints should be properly lubricated for easy tightening.
- v) Entry to scaffolding should be restricted.

	OISD – GDN – 192 SAFETY PRACTICES DURING CONSTRUCTION	Page No. 21
--	--	-------------

- vi) Erection, alteration and removal shall be done under supervision of experienced personnel.
- vii) Use of barrels, boxes, loose bricks etc., for supporting scaffolds shall not be permitted.
- viii) Each supporting member of platform shall be securely fastened and braced.
- ix) Where planks are butt-joined, two parallel putlogs shall be used, not more than 100mm apart, to give support to each plank.
- x) Platform plank shall not project beyond its end support to a distance exceeding 4 times the thickness of plank, unless it is effectively secured to prevent tipping. Cantilever planks should be avoided. If it is unavoidable overhang should be effectively secured to prevent tipping.
- xi) The platform edges shall be provided with 150mm high toe board to eliminate hazards of tools or other objects falling from platform.
- xii) Erect ladders in the “four up-one out position”
- xiii) Ladder shall be properly secured with the structure.
- xiv) Use non-slip devices, such as, rubber shoes or pointed steel ferules at the ladder foot, rubber wheels at ladder top, fixing wooden battens, cleats etc.
- xv) When ladder is used for climbing over a platform, the ladder must be of sufficient length, to extend at least one meter above the platform, when erected against the platform in “four up-one out position.”
- xvi) Portable ladders shall be used for heights not more than 4mt. Above 4mt flights, fixed ladders shall be provided with at least 600 mm landings at every 6mt or less.
- xvii) The width of ladder shall not be less than 300mm and rungs shall be spaced not more than 300mm.
- xviii) Every platform and means of access shall be kept free from obstruction.
- xix) If grease, mud, gravel, mortar etc., fall on platform or scaffolds, these shall be removed immediately to avoid slippage.
- xx) Workers shall not be allowed to work on scaffolds during storms or high wind. After heavy rain or storms, scaffolds shall be inspected before reuse.
- xxi) Don't overload the scaffolding. Remove excess material and scrap immediately.
- xxii) Dismantling of scaffolds shall be done in a pre-planned sequential manner.

6.2.5 Suspended scaffolds/ boatwain's chair

In addition to the requirements for scaffolds in general as regards soundness, stability and protection against the risk of falls, suspended scaffolds should meet the following specific requirements.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 22</p>
--	--	---

- (a) platforms should be designed and built with dimensions that are compatible with the stability of the structure as a whole, especially the length;
- (b) the number or anchorage should be compatible with the dimensions of the platform;
- (c) the safety of workers should be safeguarded by an extra rope having a point of attachment independent of the anchorage arrangements of the scaffold;
- (d) the anchorage and other elements of support of the scaffold should be designed and built in such a way as to ensure sufficient strength;
- (e) the ropes, winches, pulleys or pulley blocks should be designed, assembled, used and maintained according to the requirements established for lifting gear adapted to the lifting of persons according to national laws and regulations;
- (f) before use, the whole structure should be checked by a competent person.


6.2.6 Bamboo Scaffolding

- i) It should not be used in oil & gas installations and in the areas where hot work is to be done.
- ii) For construction and maintenance of low rise residential and office buildings, situated outside explosive licensed area, bamboo scaffold, if unavoidable, should conform to provisions given in IS-3696 (Part 1)-1987.

6.3 STRUCTURAL WORK, LAYING OF REINFORCEMENT & CONCRETING


6.3.1 General provisions

- i) The erection or dismantling of buildings, structures, civil engineering works, formwork, falsework and shoring should be carried out by trained workers only under the supervision of a competent person.
- ii) Precautions should be taken to guard against danger to workers arising from any temporary state of weakness or instability of a structure.
- iii) Formwork, falsework and shoring should be so designed, constructed and maintained that it will safely support all loads that may be imposed on it. Conformity with design during job execution shall be certified by the competent person and the relevant records shall be maintained.
- iv) Formwork should be so designed and erected that working platforms, means of access, bracing and means of handling and stabilising are easily fixed to the formwork structure.
- v) Proper methodology based on the design of the building / structure to be developed and approved by competent person before resorting to dismantling / modifications.
- vi) All works / facilities should be certified for structural stabilities by a competent person and on statutory requirement completed before putting to use.


	OISD – GDN – 192	Page No. 23
	SAFETY PRACTICES DURING CONSTRUCTION	

6.3.2 Erection and dismantling of steel and prefabricated structures

- i) The safety of workers employed on the erection and dismantling of steel and prefabricated structures should be ensured by appropriate means, such as provision and use of:
 - (a) ladders, gangways or fixed platforms;
 - (b) platforms, buckets, boatswain's chairs or other appropriate means suspended from lifting appliances;
 - (c) safety harnesses and lifelines supported on properly designed anchor, catch nets or catch platforms;
 - (d) Mechanical / Power-operated mobile working platforms;
 - (e) Proper Personal Protective Equipment.
- ii) Steel and prefabricated structures should be so designed and made that they can be safely transported and erected. Route survey to be carried out from works to construction site route considering the load bearing capacity of the bridges, height of the bridges en-route and maximum width and length permissible without causing any hazard to public, the route and the equipment.
- iii) In addition to the need for the stability of the part when erected, the design should explicitly take following into account:
 - (a) the conditions and methods of attachment in the operations of transport, storing and temporary support during erection or dismantling as applicable;
 - (b) Methods for the provision of safeguards such as railings and working platforms, and, when necessary, for mounting them easily on the structural steel or prefabricated parts.
- iv) The hooks and other devices built in or provided on the structural steel or prefabricated parts that are required for lifting and transporting them should be so shaped, dimensioned and positioned as:
 - (a) to withstand with a sufficient margin the stresses to which they are subjected;
 - (b) Not to set up stresses in the part that could cause failures, or stresses in the structure itself not provided for in the plans, and be designed to permit easy release from the lifting appliance. Lifting points for floor and staircase units should be located (recessed if necessary) so that they do not protrude above the surface;
 - (c) To avoid imbalance or distortion of the lifted load.
- v) Storeplaces should be so constructed that:
 - (a) there is no risk of structural steel or prefabricated parts falling or overturning;
 - (b) storage conditions generally ensure stability and avoid damage having regard to the method of storage and atmospheric conditions;
 - (c) racks are designed and secured on firm ground so that units cannot move accidentally.
- vi) While they are being stored, transported, raised or set down, structural steel or prefabricated parts should not be subjected to stresses prejudicial to their stability.
- vii) Every lifting appliance should:

	OISD – GDN – 192	Page No. 24
	SAFETY PRACTICES DURING CONSTRUCTION	


- (a) be suitable for the operations and not be capable of accidental disconnection;
- (b) be approved or tested as per statutory requirement.
- viii) Lifting hooks should have safety latch (self closing type).
- ix) Lifting hooks, Tongs, clamps and other appliances for lifting structural steel and prefabricated parts should:
 - (a) be of such shape and dimensions as to ensure a secure grip without damaging the part;
 - (b) be marked with the maximum permissible load in the most unfavourable lifting conditions.
 - (c) be periodically inspected and certified to ensure further usage as per requirement of factory act / Building & Construction Workers Regulation (BOCWR).
- x) Structural steel or prefabricated parts should be lifted only after rigging plan approved by competent person to prevent them from spinning, slipping or dropping accidentally.
- xi) When necessary to prevent danger, before they are raised from the ground, structural steel or prefabricated parts should be provided with safety devices such as railings and working platforms to prevent falls of persons.
- xii) While structural steel or prefabricated parts are being erected, the workers should be provided with appliances such as guiding ropes for guiding them as they are being lifted and set down, so as to avoid crushing of hands and to facilitate the operations. Use of such appliances should be ensured.
- xiii) A raised structural steel or prefabricated part should be so secured and wall units so propped that their stability cannot be affected, even by external factors such as wind and passing loads before its release from the lifting appliance.
- xiv) At work places, instruction should be given to the workers on the methods, arrangements and means required for the storage, transport, lifting and erection of structural steel or prefabricated parts, and, before erection starts, a meeting of all those responsible should be held to discuss and confirm the requirements for safe erection.
- xv) During transportation within the construction area, attachments such as slings and straps mounted on structural steel or prefabricated parts should be securely fastened to the parts. Vehicle loading should be such that the vehicle and the load remain stable at all positions during transportation and unloading.
- xvi) Structural steel or prefabricated parts should be so transported that the conditions do not affect the stability of the parts or the means of transport result in jolting, vibration or stresses due to blows, or loads of material or persons.
- xvii) When the method of erection does not permit the provision of other means of protection against fall of persons, the workplaces should be protected by guardrails, and if appropriate by toe-boards.
- xviii) When adverse weather conditions such as snow, hailstorm, rain and wind or reduced visibility, etc. entail risks of accidents, the rigging work should be interrupted after taking necessary safety precautions.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 25</p>
--	--	---

- xix) If necessary, to prevent danger, structural steel parts should be equipped with attachments for suspended scaffolds, lifelines or safety harnesses and other means of protection.
- xx) The risks of falling, to which workers moving on high or sloping girders are exposed, should be limited by all means of adequate collective protection or, where this is impossible, by the use of a safety harness that is well secured to a properly designed support.
- xxi) Structural steel parts that are to be erected at a height should as far as practicable be assembled on the ground.
- xxii) When structural steel or prefabricated parts are being erected, a sufficiently extended area underneath the workplace should be barricaded or guarded
- xxiii) Steel trusses that are being erected should be adequately shored, braced or guyed until they are permanently secured in position.
- xxiv) Load-bearing structural member should not be dangerously weakened by cutting, holing or other means.
- xxv) Structural members should not be forced into place by the hoisting machine while any worker is in such a position that he could be injured by the operation.
- xxvi) Open-web steel joists that are hoisted singly should be directly placed in position and secured against dislodgment.
- xxvii) All structures should be designed for either permanent anchors or provision for erection of anchors as and when required to support life line during any Maintenance work etc. during life of the structure. The point of provision of anchor should be indicated through suitable signage for ease of use as and when required.

6.3.3 Reinforcement

- i) Ensure that workers use Personnel Protective equipment like safety helmet with chin straps, safety shoes, gloves, full body safety harness, safety goggles, etc.
- ii) Don't place the hand below the rods for checking clear distance. Use measuring devices.
- iii) Don't wear loose clothes while checking the rods.
- iv) Don't stand unnecessarily on cantilever rods.
- v) To carry out welding/cutting of rods, safety procedures/precautions as mentioned in Item No. 6.5 to be followed.
- vi) For supplying of rods at heights, proper staging and/or bundling to be provided.
- vii) Ensure barricading and staging for supplying and fixing of rods at height.
- viii) For short distance carrying of materials on shoulders, suitable pads to be provided.
- ix) While transporting material by trucks/trailers, the rods shall not protrude in front of or by the sides of driver's cabin. In case such protrusion cannot be avoided behind the deck, then it should not

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 26</p>
--	--	---

extend 1/3rd of deck length or 1.5 Meters whichever is less and tied with red flags/lights.


- x) Reinforcement rods, cut pieces etc. should be properly stored at identified locations and the scrap should be disposed off promptly on regular basis.

6.3.4 Concreting

- i) Ensure stability of shuttering work before allowing concreting.
- ii) Barricade the concreting area while pouring at height/depths.
- iii) Keep vibrator hoses, pumping concrete accessories in healthy conditions and mechanically locked.
- iv) Pipelines in concrete pumping system shall not be attached to temporary structures such as scaffolds and formwork support as the forces and movements may affect their integrity.
- v) Check safety cages & guards around moving motors/parts etc. provided in concreting mixers.
- vi) Use Personal Protective Equipment like gloves, safety shoes, full body safety harness, safety goggles, etc. while dealing with concrete and wear respirators for dealing with cement.
- vii) Earthing of electrical mixers, vibrators, etc. should be done and verified.
- viii) Cleaning of rotating drums of concrete mixers shall be done from outside. Lockout devices shall be provided where workers need to enter the drum for cleaning / inspection.
- ix) Where concrete mixers are driven by internal combustion engine, exhaust points shall be located away from the worker's workstation so as to eliminate their exposure to obnoxious fumes.
- x) Don't allow unauthorised person to stand under the concreting area.
- xi) Ensure adequate lighting arrangements for carrying out concrete work during night.
- xii) Don't allow the same workers to pour concrete round the clock. Insist on shift pattern.
- xiii) During pouring, shuttering and its supports should be continuously watched for defects.
- xiv) Never look into the drum mounted on truck (such as in case of Ready Mix Concrete).

6.4 ROAD WORK


- 6.4.1 Site shall be barricaded and provided with warning signs, including night warning lamps at appropriate locations for traffic diversion. This should be done sufficiently advance as a warning to the approaching drivers for the impending danger ahead.
- 6.4.2 Filled and empty bitumen drums shall be stacked separately at designated places.

	OISD – GDN – 192	Page No. 27
	SAFETY PRACTICES DURING CONSTRUCTION	


- 6.4.3 Mixing aggregate with bitumen shall preferably be done with the help of bitumen batch mixing plant, unless operationally non-feasible.
- 6.4.4 Road rollers, Bitumen sprayers, Pavement finishers shall be driven by experienced drivers with valid driving license.
- 6.4.5 Workers handling hot bitumen sprayers or spreading bitumen aggregate mix or mixing bitumen with aggregate shall be provided with PVC hand gloves and rubber shoes with legging up to knee joints.
- 6.4.6 At the end of day's work, surplus hot bitumen in tar boiler shall be properly covered by a metal sheet, to prevent anything falling in it,
- 6.4.7 If bitumen accidentally falls on ground, it shall be immediately covered by sprinkling sand, to prevent anybody stepping on it. Then it shall be removed with the help of spade.
- 6.4.8 For cement concrete roads, besides site barricading and installation of warning signs for traffic diversion, safe practices mentioned in the chapter on "Concreting", shall also be applicable.
- 6.4.9 Any excavation for road work should be done only after surveying underground utilities and after taking suitable precautions. The underground utilities to be rerouted as required after approval of competent person / authority.
- 6.4.10 All the raw material for road construction/ maintenance to be stored on designated place which should be away from the running road. The running road should not be used for storing the sand, hot bitumen, etc..
- 6.4.11 Precaution should be taken that no construction material/ slab/ pre-fabricated object can come on the running road accidentally or due to slipping. In such case, an erection plan should be designed and got approved from the competent authority.

6.5 CUTTING / WELDING

- 6.5.1 Common hazards involved in welding/cutting are sparks, molten metal, flying particles, harmful light rays, electric shocks, depletion in O₂ concentration due to generation of toxic gases, etc. Following precautions should be taken: -
 - i) A dry chemical powder (DCP) type fire extinguisher shall be made available in the work area.
 - ii) Adequate ventilation shall be ensured by opening manholes and fixing a shield or forced circulation of air etc, while doing a job in confined space.
 - iii) Ensure that only approved and well-maintained apparatus, such as torches, manifolds, regulators or pressure reducing valves, and acetylene generators, be used. Also their regular calibration where ever necessary.
 - iv) All panels and covers shall be kept in place, when operating an electric Arc welding machine. 30mA rating ELCB shall be ensured in the power receptacle of the welding machine.
 - v) The work piece should be connected directly to Power supply, and not indirectly through pipelines/ structures/ equipment etc.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 28</p>
--	--	---

- vi) The welding receptacles shall be rated for 63 A suitable for 415V, 3-Phase system with a scraping earth. Receptacles shall have necessary mechanical interlocks and earthing facilities.
- vii) All cables, including welding and ground cables shall be checked for any worn out or cracked insulation before starting the job and such cables shall not be used. Ground cable should be separate without any loose joints.
- viii) Cable coiling shall be maintained at minimum level, if not avoidable. Criss-crossing of welding/electrical power supply cables & gas cutting hoses shall be avoided. Care to be taken against damage of gas cutting hoses.
- ix) An energised electrode shall not be left unattended.
- x) The power source shall be turned off at the end of job.
- xi) All gas cylinders shall be properly secured in upright position.
- xii) Acetylene cylinder shall be turned and kept in such a way that the valve outlet points away from oxygen cylinder.
- xiii) Acetylene cylinder key for opening valve shall be kept on valve stem, while cylinder is in use, so that the acetylene cylinder could be quickly turned off in case of emergency. Use flash back arrestors to prevent back-fire in acetylene/oxygen cylinder.
- xiv) When not in use, valves of all cylinders shall be kept closed.
- xv) All types of cylinders, whether full or empty, shall be stored at cool, dry place under shed.
- xvi) Forced opening of any cylinder valve should not be attempted.
- xvii) Lighted gas torch shall never be left unattended.
- xviii) Store acetylene and oxygen cylinders separately.
- xix) Store full and empty cylinders separately.
- xx) Avoid cylinders coming into contact with heat.
- xxi) Cylinders that are heavy or difficult to carry by hand may be rolled on their bottom edge but never dragged.
- xxii) If cylinders have to be moved, be sure that the cylinder valves are shut off.
- xxiii) Before changing torches, shut off the gas at the pressure reducing regulators and not by crimping the hose.
- xxiv) Do not use matches to light torches, use a friction lighter. Gas torch should be ignited with the lighter only. It should not be ignited by touching other hot surfaces.
- xxv) Move out any leaking cylinder immediately and cap it. No hot work should be permitted in the vicinity of such leaked cylinders.
- xxvi) Use trolleys for oxygen & acetylene cylinder and chain them.
- xxvii) Always use Red hose for acetylene and other fuel gases and Black for oxygen, and ensure that both are in equal length.
- xxviii) Ensure that hoses are free from burns, cuts and cracks and properly clamped.
- xxix) Avoid dragging hoses over sharp edges and objects


	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 29</p>
--	--	---

- xxx) Do not wrap hoses around cylinders when in use or stored.
- xxxi) Protect hoses from flying sparks, hot slag, and other hot objects. Protect cylinders by covering welding blanket while hot work in the vicinity.
- xxxii) Lubricants shall not be used on Ox-fuel gas equipment.
- xxxiii) During cutting/welding, use required PPEs like hand gloves, full body clothing of fire retardant / suitable material, safety shoes, full body safety harness, mask, goggles / face shields, welding screen of required DIN glass as per approved Weld Preparation Scheme.
- xxxiv) Hot work permit to be taken if working in hazardous area.


6.6 WORKING IN CONFINED SPACES

6.6.1 Following safety practices for working in confined space like towers, columns, tanks and other vessels should be followed in addition to the safety guidelines for specific jobs like scaffolding, cutting/welding etc.

- i) Shut down, positively isolate, depressurise and purge the vessel as per laid down procedures.
- ii) Entry inside the vessel to carry out any job shall be done after issuance of valid permit only in line with the requirement of OISD-STD-105.
- iii) Ensure proper and accessible means of exit before entry inside a confined space.
- iv) The number of persons allowed inside the vessel should be limited to avoid overcrowding. Record of entering person shall be maintained with in and out time.
- v) When the work is going on in the confined space, there should always be two men standby at the nearby manway / manhole equipped with communication arrangement to contact seniors and to evacuate the worker inside confined space in case of emergency.
- vi) Before entering inside the vessels underground or located at lower elevation, probability of dense vapours accumulating nearby should also be considered in addition to inside the vessel and corrective action should be ensured.
- vii) Ensure requisite O₂ level before entry in the confined space and monitor level periodically or other wise use required respiratory devices.
- viii) Check for no Hydrocarbon or toxic substances before entry and monitor level periodically or use requisite Personal Protective Equipment.
- ix) Ensure adequate ventilation or use respiratory devices.
- x) Depending upon need, necessary respirator system, gas masks and suit shall be worn by everyone entering confined space. In case of sewer, OWS or in the confined area where there is a possibility of toxic or inert gas, required respiratory device, shall be used by everyone while entering.

	OISD – GDN – 192	Page No. 30
	SAFETY PRACTICES DURING CONSTRUCTION	

- xi) Barricade the confined spaces during hoisting, radiography, blasting, pressure testing etc.
- xii) Use 24V flameproof lamp fittings only for illumination.
- xiii) Use tools with air motors or electric tools with maximum voltage of 24V.
- xiv) House keeping shall be well maintained.
- xv) Required PPEs like Safety helmet, safety shoes and full body harness shall be worn by everyone entering the confined space.
- xvi) Don't wear loose clothing while working in a confined space.
- xvii) In case of the vessels which are likely to contain pyrophoric substances (like Iron Sulphide), special care need to be taken before opening the vessel. Attempt should be made to remove the pyrophoric substances. Otherwise, these should be always kept wet by suitable means.
- xviii) The cutting torches should also be kept outside the vessel immediately after the cutting.
- xix) The gas cylinders used for cutting/welding shall be kept outside. Care to be taken for the integrity of gas hoses and welding cables while work is in progress.
- xx) All cables, hoses, welding equipment etc., shall be removed from confined space at end of each work day, even if the work is to be resumed in the same space the next day.
- xxi) To the extent possible sludge shall be cleared and removed from outside before entering.
- xxii) No naked light or flame or hot work such as welding, cutting and soldering should be permitted inside a confined space or area unless it has been made completely free of the flammable atmosphere, tested and found safe by a competent person. Only non-sparking tools and flameproof hand lamps protected with guard and safety torches should be used inside such confined space or area for initial inspection, cleaning or other work required to be done for making the area safe.
- xxiii) Communication should be always maintained between the worker and the attendant.
- xxiv) Inside the confined space spray painting should be avoided. If absolutely essential it should be done after ensuring adequate precautions including exhaust of paint vapours and continuous monitoring of concentration of oxygen and toxic gases.
- xxv) Before issuing the vessel entry permit, it should be ensured that all the incoming and outgoing lines to and from the vessel are positively isolated. Where this is not applicable like dampers in HRSG system, Sufficient time is to be allowed to observe the leakage of hot gases from the dampers/ passing valves before taking any decision on vessel entry permit.

	OISD – GDN – 192	Page No. 31
	SAFETY PRACTICES DURING CONSTRUCTION	


6.7 PROOF/PRESSURE TESTING

- 6.7.1 Review test procedure before allowing testing with water or air or any other fluid. Testing should be done only after proper Job Safety Analysis (JSA) and its approval.
- 6.7.2 Provide relief valves of adequate size while testing with air or other gases.
- 6.7.3 Ensure compliance of necessary precautions, step wise loading, tightening of fasteners, grouting etc. before and during testing.
- 6.7.4 Inform all concerned in advance of the testing.
- 6.7.5 Keep the vents open before opening any valve for filling/draining of liquid used for hydrotesting. The filling/draining should not exceed the designed rate for pressure testing.
- 6.7.6 Provide separate gauges of suitable range for pressurising pump and the equipment to be tested.
- 6.7.7 Provide gauges at designated locations for monitoring of pressures.
- 6.7.8 Check the calibration of all pressurising equipment and accessories and maintain records.
- 6.7.9 Take readings at pre-defined intervals.
- 6.7.10 Arrangement to be made to ensure that the pressurizing system i.e. motor-pump set is out of circuit so that the system under hydro testing is not re-pressurized by the contractor due to pressure drop before a pre-defined time.

6.8 WORKING AT HEIGHTS

6.8.1 General Provision

- i) While working at a height of more than 2.2 meters, ISI approved full body harness shall be used.
- ii) While working at a height of more than 2.2 meters, permit should be issued by competent person before commencement of the job.
- iii) Worker should be well trained on usage of full body harness including its proper usage at the time of ascending/descending.
- iv) All tools should be carried in tool bag/belt to avoid their falling.
- v) If the job is on fragile/sloping roof, roof walk ladders shall be used.
- vi) Provide lifeline properly designed, secured and anchored, wherever required. Mock Drill of use of lifeline at regular intervals to be carried out.
- vii) Additional safety measures like providing Fall Arrestor type full body harness, safety net should be provided depending upon site conditions, job requirements.
- viii) Keep working area neat and clean. Remove scrap material immediately.
- ix) Don't throw or drop material/equipment from height.
- x) Avoid jumping from one member to another. Use proper passageway.

	OISD – GDN – 192	Page No. 32
	SAFETY PRACTICES DURING CONSTRUCTION	

- xi) Keep both hands free while climbing. Don't try to bypass the steps of the ladder. Same to be followed while climbing down. Further on climbing down, front of the body to be towards the ladder.
- xii) Try to maintain calm at height. Avoid over exertion.
- xiii) Avoid movements on any structural member without fall protection.
- xiv) Elevated workplaces including roofs should be provided with safe means of access and egress such as stairs, ramps or ladders.
- xv) Fall protection hierarchy to be followed as below:
 - (a) Elimination: Explore possibility whether job can be done avoiding work at height.
 - (b) Prevention: Prevent fall of a worker by providing appropriate fall prevention system.
 - (c) Fall arrest system: Arrest the fall using suitable fall arrest system. Ensure to have a strong suitably designed anchor point.
 - (d) Warning Lines: Use a warning line using a rope or wire barrier around roof to warn workers that they are getting close to the roof edge.
 - (e) Safety Monitoring: Use a safety monitor to warn the workers.
 - (f) Administration: Prepare a written administrative procedure to ensure workers are doing the best that they can.

6.8.2 Roof Work


- i) All roof-work operations should be pre-planned and properly supervised.
- ii) Roof work should only be undertaken by workers who are physically and psychologically fit and have the necessary knowledge and experience for such work.
- iii) Work on roofs shouldn't be carried on in weather conditions that threaten the safety of workers.
- iv) Crawling boards, walkways and roof ladders should be securely fastened to a firm structure.
- v) Roofing brackets should fit the slope of the roof and be securely supported.
- vi) Where it is necessary for a person to kneel or crouch near the edge of the roof, necessary precautions should be taken.
- vii) On a large roof where work have to be carried out at or near the edge, a simple barrier consisting of crossed scaffold tubes supporting a tubing guardrail may be provided.
- viii) All covers for openings in roofs should be of substantial construction and be secured in position.
- ix) Roofs with a pitch of more than 10 should be treated as sloping.
- x) When work is being carried out on sloping roofs, sufficient and suitable crawling boards or roof ladders should be provided and firmly secured in position.

	OISD – GDN – 192	Page No. 33
	SAFETY PRACTICES DURING CONSTRUCTION	

- xi) During extensive work on the roof, strong barriers or guardrails and toe-boards should be provided to stop a person from falling off the roof.
- xii) Where workers are required to work on or near roofs or other places covered with fragile material, through which they are liable to fall, they should be provided with suitable roof ladders or crawling boards strong enough and when spanning across the supports for the roof covering to support those workers.
- xiii) A minimum of two boards should be provided so that it is not necessary for a person to stand on a fragile roof to move a board or a ladder, or for any other reason.

6.8.3 Work on tall chimneys

- i) For the erection and repair of tall chimneys, scaffolding should be provided. A safety net should be maintained at a suitable distance below the scaffold.
- ii) The scaffold floor should always be at least 65 cm below the top of the chimney.
- iii) Under the working floor of the scaffolding the next lower floor should be left in position as a catch platform.
- iv) The distance between the inside edge of the scaffold and the wall of the chimney should not exceed 20 cm at any point.
- v) Catch platforms should be erected over:
 - (a) the entrance to the chimney;
 - (b) Passageways and working places where workers could be endangered by falling objects.
- vi) For climbing tall chimneys, access should be provided by:
 - (a) stairs or ladders;
 - (b) a column of iron rungs securely embedded in the chimney wall;
 - (c) Other appropriate means.
- vii) When workers use the outside rungs to climb the chimney, a securely fastened steel core rope looped at the free end and hanging down at least 3 m should be provided at the top to help the workers to climb on to the chimney.
- viii) While work is being done on independent chimneys the area surrounding the chimney should be enclosed by fencing at a safe distance.
- ix) Workers employed on the construction, alteration, maintenance or repair of tall chimneys should not:
 - a) work on the outside without a safety harness attached by a lifeline to a rung, ring or other secure anchorage;
 - b) put tools between the safety harness and the body or in pockets not intended for the purpose;
 - c) haul heavy materials or equipment up and down by hand to or from the workplace on the chimney;
 - d) fasten pulleys or scaffolding to reinforcing rings without first verifying their stability;
 - e) work alone;

	OISD – GDN – 192	Page No. 34
	SAFETY PRACTICES DURING CONSTRUCTION	


- f) climb a chimney that is not provided with securely anchored ladders or rungs;
- g) Work on chimneys in use unless the necessary precautions to avoid danger from smoke and gases have been taken. Ensure that the outside surface temperature of the chimney is at
- h) room temperature before taking up any job after shut down of the (system) chimney.
- x) Work on independent chimneys should not be carried on in high winds, icy conditions, fog or during electrical storms.

6.9 HANDLING AND LIFTING EQUIPMENT:

6.9.1 General Provisions

Following are the general guidelines to be followed with regard to all types of handling and lifting equipment in addition to the guidelines for specific type of equipments dealt later on.


- i) There should be a well-planned safety programme to ensure that all the lifting appliances and lifting gear are selected, installed, examined, tested, maintained, operated and dismantled with a view to preventing the occurrence of any accident;
- ii) All lifting appliances shall be examined by competent persons at frequencies as specified in "The Factories act".
- iii) Check thoroughly quality, size and condition of all lifting tools like chain pulley blocks, slings, U-clamps, D-shackles etc. before putting them in use.
- iv) Safe lifting capacity of all lifting & handling equipment, tools and shackles should be got verified and certificates obtained from competent authorities before its use. The safe working load shall be marked on them.
- v) Check periodically the oil, brakes, gears, horns and tyre pressure, lighting fixtures of all moving equipments like cranes, forklifts, trailers, etc. as per manufacturer's recommendations.
- vi) Check the weights to be lifted and accordingly decide about the crane capacity, boom length and angle of erection.
- vii) Allow lifting slings as short as possible and check packing at the friction points.
- viii) While lifting/placing of the load, no unauthorised person shall remain within the radius of the boom and underneath the load.
- ix) While loading, unloading and stacking of pipes, proper wedges shall be placed to prevent rolling down of the pipes.
- x) Control longer jobs being lifted up from both ends.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 35</p>
--	--	---


- xi) Only trained operators and riggers should carry out the job. While the crane is moving or lifting the load, the trained rigger should be there for keeping a vigil against hitting any other object.
- xii) During high wind conditions and nights, lifting of heavy equipments should be avoided. If unavoidable to do erection in night, operator and rigger should be fully trained for night signaling. Also proper illumination should be there.
- xiii) Allow crane to move on hard, firm and leveled ground. Ensure that all the crane pedestals/ hydraulic jacks taking weight of the crane and load are on a firm compacted surface.
- xiv) When crane is in idle condition for long periods or unattended, crane boom should either be lowered or locked as per manufacturer's guidelines.
- xv) Hook and load being lifted shall remain in full visibility of crane operators, while lifting, to the extent possible.
- xvi) Don't allow booms or other parts of crane to come within 3 meters reach of overhead electrical cables.
- xvii) No structural alterations or repairs should be made to any part of a lifting appliance, which may affect the safety of the appliance without the permission and supervision of the competent person.

6.9.2 Hoists

- i) Hoist shafts should be enclosed with rigid panels or other adequate fencing at:
 - (a) ground level on all sides;
 - (b) all other levels at all points at which access is provided;
 - (c) all points at which persons are liable to be struck by any moving part.
- ii) The enclosure of hoist shafts, except at approaches should extend where practicable at least 2 meters above the floor, platform or other place to which access is provided except where a lesser height is sufficient to prevent any person falling down the hoistway and there is no risk of any person coming into contact with any moving part of the hoist, but in no case should the enclosure be less than 1 meter in height.
- iii) The guides of hoist platforms should offer sufficient resistance to bending and, in the case of jamming by a safety catch, to buckling.
- iv) Where necessary to prevent danger, adequate covering should be provided above the top of hoist shafts to prevent material falling down them.
- v) Outdoor hoist towers should be erected on firm foundations, and securely braced, guyed and anchored.
- vi) A ladderway should extend from the bottom to the top of outdoor hoist towers, if no other ladderway exists within easy reach.
- vii) Hoisting engines should be of ample capacity to control the heaviest load that they will have to move.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 36</p>
--	--	---

- viii) Hoists should be provided with devices that stop the hoisting engine as soon as the platform reaches its highest stopping place.
- ix) Winches should be so constructed that the brake is applied when the control handle is not held in the operating position.
- x) It should not be possible to set in motion from the platform a hoist, which is not designed for the conveyance of persons.
- xi) Winches should not be fitted with pawl and ratchet gears on which the pawl must be disengaged before the platform is lowered.
- xii) Hoist platforms should be capable of supporting the maximum load that they will have to carry with a safety factor.
- xiii) Hoist platforms should be equipped with safety gear that will hold the platform with the maximum load if the hoisting rope breaks.
- xiv) If workers have to enter the cage or go on the platform at landings there should be a locking arrangement preventing the cage or platform from moving while any worker is in or on it.
- xv) On sides not used for loading and unloading, hoist platforms should be provided with toe-boards and enclosures of wire mesh or other suitable material to prevent the fall of parts of loads.
- xvi) Where necessary to prevent danger from falling objects, hoist platforms should be provided with adequate covering.
- xvii) Counterweights consisting of an assemblage of several parts should be made of specially constructed parts rigidly connected together.
- xviii) Counterweights should run in guides.
- xix) Platforms should be provided at all landings used by workers.
- xx) Following notices should be posted up conspicuously and in very legible characters:
 - (a) on all hoists:
 - on the platform: the carrying capacity in kilograms or other appropriate standard unit of weight;
 - on the hoisting engine: the lifting capacity in kilograms or other appropriate standard unit of weight;
 - (b) on hoists authorised or certified for the conveyance of persons:
 - on the platform or cage: the maximum number of persons to be carried at one time;
 - (c) on hoists for goods only:
 - on every approach to the hoist and on the platform: prohibition of use by persons.
- xxi) Hoists intended for the carriage of persons should be provided with a cage so constructed as to prevent any person from falling out or being trapped between the cage and any fixed part of the structure when the cage gate is shut, or from being struck by the counterbalance weight or by articles or materials tailing down the hoistway.

	OISD – GDN – 192	Page No. 37
	SAFETY PRACTICES DURING CONSTRUCTION	

- xxii) On each side in which access is provided, the cage should have a gate fitted with devices which ensure that the gate cannot be opened except when the cage is at a landing and that the gate must be closed before the cage can move away from the landing.
- xxiii) Every gate in the enclosure of the hoist shaft which gives access from a landing place to the cage should be fitted with devices to ensure that the gate cannot be opened except when the cage is at that landing place, and that the cage cannot be moved away from that landing place until the gate is closed.

6.9.3 Derricks


Stiff-leg derricks

- i) Derricks should be erected on a firm base capable of taking the combined weight of the crane structure and maximum rated load.
- ii) Devices should be used to prevent masts from lifting out of their seating.
- iii) Electrically operated derricks should be effectively earthed from the sole plate or framework.
- iv) Counterweights should be so arranged that they do not subject the backstays, sleepers or pivots to excessive strain.
- v) When derricks are mounted on wheels:
 - a) a rigid member should be used to maintain the correct distance between the wheels;
 - b) they should be equipped with struts to prevent them from dropping if a wheel breaks or the derrick is derailed.
- vi) The length of a derrick jib should not be altered without consulting the manufacturer.
- vii) The jib of a scotch derrick crane should not be erected within the backstays of the crane.

Guy derricks

- i) The restraint of the guy ropes should be ensured by fitting stirrups or anchor plates in concrete foundations.
- ii) The mast of guy derricks should be supported by six top guys spaced approximately equally.
- iii) The spread of the guys of a guy derrick crane from the mast should not be more than 45° from the horizontal.
- iv) Guy ropes of derricks should be equipped with a stretching screw or turnbuckle or other device to regulate the tension.
- v) Gudgeon pins, sheave pins and fool bearings should be lubricated frequently.
- vi) When a derrick is not in use, the boom should be anchored to prevent it from swinging.


6.9.4 Gin poles

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 38</p>
--	--	---

- i) Gin poles should:
 - (a) be straight;
 - (b) consist of steel or other suitable metal;
 - (c) be adequately guyed and anchored;
 - (d) be vertical or raked slightly towards the load;
 - (e) be of adequate strength for the loads that they will be required to lift/move.
- ii) Gin poles should not be spliced and if a gin pole is composed of different elements, they should be assembled in conformity with their intrinsic material strength.
- iii) Gin poles should be fastened at their feet to prevent displacement in operation.
- iv) Gin poles, which are moved from place to place and re-erected, should not be taken into use again before the pole, lifting ropes, guys, blocks and other parts have been inspected, and the whole appliance has been tested under load.
- v) When platforms or skips are hoisted by gin poles, precautions should be taken to prevent them from spinning and to provide for proper landing.

6.9.5 Tower cranes

- i) Where tower cranes have cabs at high level, persons, capable and trained to work at heights, should only be employed as crane operators.
- ii) The characteristics of the various machines available should be considered against the operating requirements and the surroundings in which the crane will operate before a particular type of crane is selected.
- iii) Care should be taken in the assessment of wind loads both during operations and out of service. Account should also be taken of the effects of high structures on wind forces in the vicinity of the crane.
- iv) The ground on which the tower crane stands should have the requisite bearing capacity. Account should be taken of seasonal variations in ground conditions.
- v) Bases for tower cranes and tracks for rail-mounted tower cranes should be firm and level. Tower cranes should only operate on gradients within limits specified by the manufacturer. Tower cranes should only be erected at a safe distance from excavations and ditches.
- vi) Tower cranes should be sited where there is clear space available for erection, operation and dismantling. As far as possible, cranes should be sited so that loads do not have to be handled over occupied premises, over public thoroughfares, other construction works and railways or near power cables.
- vii) Where two or more tower cranes are sited in positions where their jibs could touch any part of the other crane, there should be direct means of communication between them and a distinct warning system operated from the cab so that one driver may alert the other of impending danger.

	OISD – GDN – 192	Page No. 39
	SAFETY PRACTICES DURING CONSTRUCTION	


- viii) The manufacturers' instructions on the methods and sequence of erection and dismantling should be followed. The crane should be tested before being taken into use.
- ix) The climbing operation of climbing tower cranes should be carried out in accordance with manufacturers' instructions. The free-standing height of the tower crane should not extend beyond what is safe and permissible in the manufacturers' instructions.
- x) When the tower crane is left unattended, loads should be removed from the hook, the hook raised, the power switched off and the boom brought to the horizontal. For longer periods or at times when adverse weather conditions are expected, out of service procedures should be followed. The main jib should be slewed to the side of the tower away from the wind, put into free slew and the crane immobilised.
- xi) A windspeed measuring device should be provided at an elevated position on the tower crane with the indicator fitted in the drivers' cab.
- xii) Devices should be provided to prevent loads being moved to a point where the corresponding safe working load of the crane would be exceeded. Name boards or other items liable to catch the wind should not be mounted on a tower crane other than in accordance with the manufacturers' instructions.
- xiii) Tower cranes should not be used for magnet, or demolition ball service, piling operations or other duties, which could impose excessive loading on the crane structure.

6.9.6 Lifting ropes

- i) Only ropes with a known safe working capacity should be used as lifting ropes.
- ii) Lifting ropes should be installed, maintained and inspected in accordance with manufacturers' instructions.
- iii) Repaired steel ropes should not be used on hoists.
- iv) Where multiple independent ropes are used, for the purpose of stability, to lift a work platform, each rope should be capable of carrying the load independently.

6.10 VEHICLE MOVEMENT

- 6.10.1 Park vehicles only at designated places. Don't block roads to create hindrance for other vehicles.
- 6.10.2 Don't overload the vehicle.
- 6.10.3 Obey speed limits and traffic rules.
- 6.10.4 Always expect the unexpected and be a defensive driver.
- 6.10.5 Drive carefully during adverse weather and road conditions.
- 6.10.6 Read the road ahead and ride to the left.
- 6.10.7 Be extra cautious at nights. Keep wind screens clean and lights in working condition.


	OISD – GDN – 192	Page No. 40
	SAFETY PRACTICES DURING CONSTRUCTION	

- 6.10.8 All vehicles used for carrying workers and construction materials must undergo predictive/preventive maintenance and daily checks
- 6.10.9 Driver with proper valid driving license shall only be allowed to drive the vehicle
- 6.10.10 Routes shall be leveled marked and planned in such a way so as to avoid potential hazards such as overhead power lines and sloping ground etc.
- 6.10.11 While reversing the vehicles, help of another worker should be ensured at all times
- 6.10.12 An unattended vehicle should have the engine switched off
- 6.10.13 Wherever possible one-way system shall be followed
- 6.10.14 Barriers/fixed stops should be provided for excavation/openings to prevent fall of vehicle
- 6.10.15 Load should be properly secured
- 6.10.16 The body of the tipper lorry should always be lowered before driving the vehicle off.
- 6.10.17 Signs/signals/caution boards etc. should be provided on routes.
- 6.10.18 All vehicles in a running process plants to use spark arrester on the exhaust.
- 6.10.19 No material should be protruding outside the vehicle for the safety of the public. If necessary, same to be marked as per RTO regulations.
- 6.10.20 Proper caution tag should be available on the vehicle for hazardous material like oil, LPG, explosives, nuclear material, toxic fluids etc and the vehicle staff should be well informed about the potential danger of the material being transported by them.
- 6.10.21 An earth chain for the discharge of static electricity generated during transportation of specific material with the vehicle to be provided.
- 6.10.22 Drunken driving should be prohibited.

6.11 ELECTRICAL


6.11.1 General Provisions

- i) Only persons having valid licenses shall be allowed to work on electrical facilities as per prevailing IE Act and rules thereunder including CEA rules/regulations.
- ii) No person should be allowed to work on live circuit. The same, if unavoidable, special care and written authorisation need to be taken.
- iii) Treat all circuits as "LIVE" unless ensured otherwise.
- iv) Electrical " Lock Out - Tag Out (LOTO)" procedure "MUST" be followed for work on electrical system.
- v) Display voltage ratings prominently with "Danger" signs in local language also.
- vi) Put caution/notice signs before starting the repair works.

	OISD – GDN – 192	Page No. 41
	SAFETY PRACTICES DURING CONSTRUCTION	

- vii) All electrical equipment operating above 250V shall have two separate and distinct connections to earth grid.
- viii) Proper grounding to be ensured for all switch boards and equipment including Portable ones prior to taking into service.
- ix) Make sure that electrical switch boards, portable tools, equipment (like grinding machine etc.) don't get wet during their usage. If it happens, stop the main supply, make the tools dry, check for specified insulation value and then only use them. Check proper earthing.

All temporary switch boards/ KIOSKS put up at work site should be suitably protected from rain and the level of same should be high enough to avoid contact with water due to water logging.
- x) Don't work wet on electrical system.
- xi) Don't overload the electrical system.
- xii) Use only proper rated HRC fuses / ELCB / MCB.
- xiii) Only ISI marked or equivalent industrial type extension boards and Plug sockets are to be used.
- xiv) ELCB for all temporary connections must be provided using 3 pin plug.
- xv) All power supply cables should be laid properly and neatly so that they don't cause hindrance to persons working and no physical damage also takes place to the cables during various construction activities.
- xvi) All Power cables to be properly terminated using glands and lugs of proper size, type and crimped.
- xvii) Use electrical fittings in Hazard zones as per area classification under OISD-STD-113.
- xviii) Ensure pipe sleeve / conduit to protect underground cables at crossings.
- xix) Don't lay unarmored cable directly on ground, wall, roof or trees. All temporary cables should be laid at least 750 mm below ground and cable markers should be provided. Proper sleeves should be provided at road crossings. In case temporary cables are to be laid on wooden poles/steel poles, the minimum cable heights should be 4.5 M.
- xx) Maintain safe overhead distance of HT transmission lines as per latest CEA Safety Regulation.
- xxi) Don't use pipelines/structures for earthing.
- xxii) Don't make any unsafe temporary connections, e.g. naked joints etc.
- xxiii) Ensure that temporary cables are free from cuts, damaged insulation, kinks or improper insulated joints.
- xxiv) Check at periodic intervals that pins of sockets and joints are not loose.

	OISD – GDN – 192	Page No. 42
	SAFETY PRACTICES DURING CONSTRUCTION	


- xxv) Protect electrical wires/equipment from water and naked flames.
- xxvi) Illuminate level in all the work areas should be in line with OISD-RP-149.
- xxvii) All switchboards should be of MS structure only and incoming/outgoing feeders should be marked.
- xxviii) Hand lamps/ Torch should not be of more than 24V rating, and E'x' type should be in line with hazardous area classification.
- xxix) Fire extinguishers (DCP/CO₂/Sand buckets) should be kept near temporary switch boards being used for construction purposes. Don't use water for fighting electrical fires.
- xxx) ISI marked Insulating mats shall be provided in the front and back end of switch boards.
- xxxi) All parts of electrical installations should be so constructed, installed and maintained as to prevent danger of electric shock, fire and explosion.

Periodic checking of electrical safety appliances such as gloves, insulating mats, hoods etc. to be done/witnessed in line with OISD-STD-137, and records to be maintained duly endorsed by the concerned.
- xxxii) A notice displaying following, should be kept exhibited at suitable places in local language also:
 - a) prohibiting unauthorized persons from entering electrical equipment rooms or from handling or interfering with electrical apparatus;
 - b) containing directions as to procedures in case of fire, rescue of persons in contact with live conductors and the restoration of persons suffering from electric shock;
 - c) specifying the person to be notified in case of electrical accident or dangerous occurrence, and indicating how to communicate with him.
- xxxiii) No other cables/pipes to be laid in trench used for electrical cables.
- xxxiv) Utmost care should be taken while excavating Earth from cable trench to avoid damage or any accident.
- xxxv) Sub-station floor cut-outs meant for switch board installations to be covered wherever installation is incomplete.
- xxxvi) Flameproofness integrity of all flameproof equipment / fittings/fixtures to be ensured at all times.

NOTE: A Residual Current Operated Circuit Breaker (RCCB) or Earth Leakage Circuit Breaker (ELCB), when installed, protects a human being to the widest extent. RCCB or ELCB should be provided as per latest CEA Safety Regulation.

6.11.2 Inspection and maintenance

- i) All electrical equipment should be inspected before taking into use to ensure suitability for its proposed use.

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 43</p>
--	--	---

- ii) At the beginning of every shift, the person using the electrical equipment should make a careful external examination of the equipment and conductors, especially the flexible cables.
- iii) Apart from some exceptional cases subject to work permits, work on or near live parts of electrical equipment should be forbidden.

Before starting any work on conductors and/or equipment, it is to be ensured that: power supply should be isolated by an authorized person following the concept of LOTO;
- iv) After work has been done on conductors and/or equipment, the power supply should only be switched on again after work permit is returned back, lock/tag on isolated feeder are removed and the workplace is reported safe.
- v) Electricians should be provided with approved and tested tools and personal protective equipment such as rubber gloves, arc flash suit etc.
- vi) All conductors and equipment should be considered to be live unless there is a proof of the contrary.
- vii) When work has to be done in dangerous proximity to live parts the power supply should be cut off. If for operational reasons this is not possible, the live parts should be fenced off or enclosed by qualified staff from the sub-station concerned.

6.11.3. Testing


- i) Electrical installations should be inspected and tested as per approved plan and the results recorded.
- ii) Periodic testing for proper functioning of the earth leakage protective devices should be carried out.
- iii) Particular attention should be paid to the earthing of apparatus, the continuity of protective conductors, polarity and insulation resistance, protection against mechanical damage and condition of connections at points of entry.

6.12 OFFSHORE

6.12.1 General

The isolated nature of offshore installations are hazardous. They call for greater need for health safety and survival at offshore. Safety at offshore is safety of installations and safety of personnel. Safety problems and accidents at offshore have high risks due to limited space, helicopter operation, sea transport etc. Following are the general health and safety guidelines to be followed in addition to the safety guidelines stipulated for specific jobs dealt later on:

- i) Workers should be well trained to do their job independently with high degree of self-control and self-discipline.

	OISD – GDN – 192	Page No. 44
	SAFETY PRACTICES DURING CONSTRUCTION	


- ii) On arrival at offshore, everyone should be briefed about the safety rules to be followed at offshore, evacuation system etc. All personnel should wear overall (dangri), helmet and shoes for personnel protection.
- iii) In case of emergency, workers should follow instruction of Field Production Superintendent (F.P.S.). In certain cases instructions may be given to abandon the offshore installation and evacuate the persons to safe location.
- iv) To overcome above problems, offshore personnel must receive training for using life saving appliances and other personal survival techniques.
- v) Any person working at offshore should have one person as standby for any eventuality.
- vi) Periodical health check-up of all personal on platforms shall be ensured and remedial measures shall be taken as per statutory and other requirements.

6.12.2 Drilling Rigs

- i) Location of jack up rigs should not be less than 5 Kms from shipping route. Orientation of the rig, wind direction, etc. are required for safe landing of helicopter. Information w.r.t. sea currents, wind speed, Hi- Low tide, etc. are required for mooring of supply vessels.
- ii) Sea bed condition at every location should be ensured for safety of rig.
- iii) Radio and other communication facilities should be such to maintain contact with base all times.
- iv) During toeing of rig, the rig deck should be clear of load, toeing lines should be in good condition and tensions in various toeing lines should be constantly monitored.
- v) Few steps during toeing are:
 - a) crane booms should be secured to their vesa,
 - b) all hatches and water tight doors should be closed,
 - c) number of personnel on board should be restricted,
 - d) evacuate in case of emergency and operation should be completed preferably in day light.

6.12.3 Drilling

- i) In view of CO₂ and H₂S gas cut from well, effective ventilation should be provided where drilling is in progress.
- ii) Safety alarm shall be checked in advance in view of failure of ventilation system.
- iii) Suitable sensors for H₂S and Methane should be function tested time to time and suitable colour code should be given.
- iv) Working areas of the crane should be illuminated during night to avoid accident.


	OISD – GDN – 192	Page No. 45
	SAFETY PRACTICES DURING CONSTRUCTION	

- v) Clear space should be available for despatch and receipt of load and, in particular, basket transfer of passengers. Persons engaged in loading/unloading of materials should be protected from falling into the sea.
- vi) Signal light should be fitted at the top of the jib.
- vii) Crane hook should be fitted with safety latches.
- viii) Experienced person should be engaged in operation of specific equipment like winches, cranes etc.
- ix) At least three cable turns shall always be there on the winch drum.
- x) Adequate communication like walkie talkie, round robin phone should be available between the crane operator, supervisor and helper.
- xi) Crane operation should be completely stopped during helicopter landing/ taking off.
- xii) Except for helicopter landing deck, all decks, platforms, bridges, ladders should have rigid and fixed guard rails atleast one meter high and should have one intermediate rail midway between the handrail and 100 mm toe board.
- xiii) Wooden ladders shall not be used at offshore.
- xiv) Flow sensor in the flow line should be ensured for safe working and to avoid blow out.
- xv) Hydrogen sulphide gas In offshore is of great risk and at 10 ppm (0.001%) concentration in air, a person should not be exposed for more than 8 hours, If concentration is more, then breathing apparatus should be used. Corrosion of equipment is also caused by H₂S.
- xvi) Portable H₂S gas detector should be continuously used.

6.12.4 Production Platforms

- i) In case hydrocarbon is released due to overpressure, leak, overflow, gas blow etc., shut down process to stop flow of hydrocarbon. Prevent ignition of released hydrocarbon and in case of fire shut in the process complex and follow emergency contingency plan.
- ii) Sub surface safety valve (SSSV) below the well head should be actuated during uncontrolled well -flow and they should be regularly checked.
- iii) Surface safety valve or SDV should be checked for no gas leakage from bleed port / flange etc., in the well head area. It should not be in "mechanical override" or bypassed from panel.
- iv) High pressure gas lift lines - blowdown system should be O.K.

*Auto actuation of SDVs in the inlet of pressure vessels should be O.K. and in "normal position" from shutdown panels. A record of status of switches normal/bypassed

	OISD – GDN – 192	Page No. 46
	SAFETY PRACTICES DURING CONSTRUCTION	


in auto-con* panels (PSH, PSL, LSL, ILSL) should be maintained.

***Shut Down Panels**

- v) Welders rectifier set and electrical connections to it should be checked and approved by electrical-in-charge for proper electrical safety.
- vi) "SCADA" telemetry system if available should be operational for remote opening and closing of wells at unmanned platforms (through RPMC).
- vii) Local ESD/FSD (near the work site) should be provided for jobs of very critical nature, so that the persons working can access it immediately in emergency for safety. Safety officer should judge the requirement & inform FPS for the same.
- viii) Railings and Gratings etc. in and around work area should be O.K. and inspected to avoid slippage of man into sea.
- ix) Emergency Shut Down (ESD) system is initiated when an abnormal condition is detected. ESD should be checked once in six months.
- x) Platform should be manned round the clock.
- xi) Welding and cutting work should be regulated by hot work permit.
- xii) All detectors should be calibrated as per recommendation of the manufacturer.
- xiii) No system should be by-passed which affects the system of platform.
- xiv) In H₂S field platforms, due care shall be taken as per recommendations.
- xv) Follow the instructions of F.P.S. during stay at platform

6.12.5 Fire Prevention And Control

- i) Provision be made for safe handling and storage of dirty rags, trash, and waste oil. Flammable liquids and chemicals applied on platform should be immediately cleaned.
- ii) Paint containers and hydrocarbon samples, gas cylinders for welding and cutting should be stored properly. Cylinders should be transported in hand-cart.
- iii) Smoking should be restricted and no smoking area should be identified.
- iv) Special attention should be given to crude oil pump seals; diesel and gas engines which are potential source of ignition in the event of failure.
- v) Fire and smoke detectors i.e. ultraviolet heat, thermal and smoke detector should be function tested once in three months.

	OISD – GDN – 192	Page No. 47
	SAFETY PRACTICES DURING CONSTRUCTION	


- vi) Fire is controlled in offshore by water spraying, Halon, CO₂ flooding, DCP and sprinkler system.
- vii) Foaming agent is applied for controlling fire in liquid hydrocarbon. The system is not effective in gas fire.
- viii) Light weight breathing system should be used.
- ix) The fire control plan at offshore should reveal control station, fire alarms and fire detectors, deluge valves and sprinkler, fire extinguishing appliances, fireman outfit and ventilation system.
- x) Fire fighting equipment should be maintained in ready to use condition.

6.12.6 Life Saving Appliances

- i) Life boats with a speed of 6 knots and carrying capacity upto 50 persons are used in offshore.
- ii) No. of life boats on one installation should have a capacity to accommodate twice the number of persons onboard installation.
- iii) Launching appliances and life boat equipment should be checked every week.
- iv) Boat landing areas should be adequately illuminated.
- v) Life raft has no power and they rely on drift.
- vi) Life jacket lifts the wearer after entering water.
- vii) Life buoys are used to rescue persons if any person accidentally falls in the sea.
- viii) All life saving appliances should be inspected by the MMD surveyor /sr. officials once a year.
- ix) Every life boat shall be inspected once a week.
- x) Every life boat and life raft should be serviced once a year by a competent authority.

6.12.7 Safety Precautions during Helicopter Transportation

- i) Passenger briefing regarding safety rules while travelling in helicopter should be carried out before boarding the helicopter.
- ii) Emergency procedure should be briefed to all the passengers in case helicopter is to ditch into the sea.
- iii) Heli-pad should have a non-skid surface. Nylon rope net should be stretched on the deck.
- iv) Proper drainage should be available on helideck.
- v) There should be no obstruction on the helideck itself and within 3 meters of its perimeter. Closest super structure above the helideck should have red obstruction light.


	OISD – GDN – 192	Page No. 48
	SAFETY PRACTICES DURING CONSTRUCTION	

- vi) While landing on helicopter, fire crew of two persons should be standby adjacent to helideck.
- vii) Heli-deck should be properly illuminated for night landing.
- viii) During switching off helicopter, persons should not be allowed to go out/ towards helicopter

6.13 DEMOLITION

6.13.1. General provisions

- i) When the demolition of any building or structure might present danger to workers or to the public:
 - (a) necessary precautions, methods and procedures should be adopted, including those for the disposal of waste or residues;
 - (b) the work should be planned and undertaken only under the supervision of a competent person.
- ii) Before demolition operations begin:
 - (a) structural details and builders' drawings should be obtained wherever possible;
 - (b) details of the previous use should be obtained to identify any possible contamination and hazards from chemicals, flammables, etc.;
 - (c) an initial survey should be carried out to identify any structural problems and risks associated with flammable substances and substances hazardous to health. The survey should note the type of ground on which the structure is erected, the condition of the roof trusses, the type of framing used in framed structures and the load-bearing walls;
 - (d) a method of demolition should be formulated after the survey and recorded in a method statement having taken all the various considerations into account and identifying the problems and their solutions;
- iii) All electric, gas, water and steam service lines should be shut off and, as necessary, capped or otherwise controlled at or outside the construction site before work commences.
- iv) If it is necessary to maintain any electric power, water or other services during demolition operations, they should be adequately protected against damage.
- v) As far as practicable, the danger zone round the building should be adequately fenced off and sign posted. To protect the public a fence 2m high should be erected enclosing the demolition operations and the access gates should be secured outside working hours.
- vi) The fabric of buildings contaminated with substances hazardous to health should be decontaminated. Protective clothing and respiratory devices should be provided and worn.
- vii) Where plant has contained flammable materials, special precautions should be taken to avoid fire and explosion.

	OISD – GDN – 192	Page No. 49
	SAFETY PRACTICES DURING CONSTRUCTION	


- viii) The plant to be demolished should be isolated from all other plant that may contain flammable materials. Any residual flammable material in the plant should be rendered safe by cleaning, purging or the application of an inert atmosphere as appropriate.
- ix) Care should be taken not to demolish any parts, which would destroy the stability of other parts.
- x) Demolition activities should not be continued under adverse climatic conditions such as high winds, which could cause the collapse of already weakened structures.
- xi) To prevent hazards parts of structures should be adequately shored, braced or otherwise supported.
- xii) Structures should not be left in a condition in which they could be brought down by wind pressure or vibration.
- xiii) Where a deliberate controlled collapse technique is to be used, expert engineering advice should be obtained, and:
 - (a) it should only be used where the whole structure is to come down because it relies on the removal of key structural members to effect a total collapse;
 - (b) it should only be used on sites that are fairly level and where there is enough surrounding space for all operatives and equipment to be withdrawn to a safe distance.
- xiv) When equipment such as power shovels and bulldozers are used for demolition, due consideration should be given to the nature of the building or structure, its dimensions, as well as to the power of the equipment being used.
- xv) If a swinging weight is used for demolition, a safety zone having a width of at least one-and-a-half times the height of the building or structure should be maintained around the points of impact.

6.13.2. Demolition of structural steelwork

- i) All precautions should be taken to prevent danger from any sudden twist, spring or collapse of steelwork, ironwork or reinforced concrete when it is cut or released.
- ii) Steel construction should be demolished tier by tier.
- iii) Structural steel parts should be lowered and not dropped from a height.

6.14 RADIOGRAPHY


- 6.14.1 All radiography jobs shall be carried out as per BARC Safety Regulations
- 6.14.2 During field radiography, nearby area around the radiation source should be cordoned off.

	OISD – GDN – 192	Page No. 50
	SAFETY PRACTICES DURING CONSTRUCTION	

- 6.14.3 If the field radiography is to be done at the same location repeatedly, it is advisable to provide either a wire fencing around or a temporary brick enclosure.
- 6.14.4 Special permission/permit should be taken for radiography from area-in-charge.
- 6.14.5 As far as possible, field radiography should be done only during night time when there is little or no occupancy there.
- 6.14.6 Radiation warning signals should be pasted all along the cordoned off area.
- 6.14.7 Entry into the restricted area by unauthorised persons should be strictly prohibited during exposure.
- 6.14.8 The radiation level alongwith the cordon should be monitored by a suitable and well-calibrated radiation survey meter.
- 6.14.9 All personnel working with radiography sources should wear appropriate protective equipment and film badges issued by BARC.
- 6.14.10 Protection facilities such as manipulator rod, remote handling tongs, lead pots, radiation hazard placards and means of cordon off shall be available at each site.
- 6.14.11 The radiography source shall never be touched or handled directly with hands.
- 6.14.12 The package containing radiography cameras and sources should never be carried by public transport like bus, train etc.
- 6.14.13 Radiography sources and cameras, when not in use, should be stored inside a source pit with lock and key arrangement as approved by BARC. The storage room should preferably be located in an isolated area of minimum occupancy and radiation level outside the storage room should not exceed 0.25 mR/hr as per BARC Regulations.
- 6.14.14 In case of an accident (due to loss or of damage to radiography source), action should be taken in line with BARC Safety Rules/Guidelines.
- 6.14.15 Technologically advance methods should be preferred for reduced radiation effect wherever safety so warrants.

6.15 GRIT SHOT/ SLAG BLASTING/ SPRAY PAINTING

- 6.15.1 Blasting for surface preparation should be used only after approval from competent person.
- 6.15.2 Air Compressor used for grit/shot/slag blasting/painting should have guard and positioned away from the work place.
- 6.15.3 Exhaust of the prime mover, if IC engine is used, should be fitted with PESO approved spark arrester (in case of work in hazardous area) and directed away from the work place.
- 6.15.4 In case of motor driven compressor, the body of the motor as well as the compressor to be properly earthed.
- 6.15.5 The hoses used for compressed air should be of proper quality, and health of the same to be ensured through regular check/ test.


	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 51</p>
--	--	---

- 6.15.6 The operator of grit/shot/slag blasting/painting should wear suitable PPE's including mask and the area should be cordoned off.
- 6.15.7 Adequate measures to be taken to suppress dust/spray particle.
- 6.15.8 When these activities are done in confined places, adequate measure to be taken including monitoring Oxygen level and ensuring proper ventilation.
- 6.15.9 Proper fire fighting arrangements are to be made where spray painting is in progress.
- 6.15.10 Some paints and their supplements are toxic also and emit offensive smell. PPE to workers should be suitable to address this issue.
- 6.15.11 "No Smoking Zone" boards should be displayed prominently in paints shop/ spray paint area.

6.16 WORK ABOVE WATER

6.16.1 General Provisions

- i) Where work is done over or in close proximity to water & where possibility of drowning exists, provision should be made for:
 - a) preventing workers from falling into water;
 - b) the rescue of workers in danger of drowning;
 - c) safe and sufficient transport.
 - d) deputation of lifeguards/divers.
 - e) preventing of persons suffering from hydrophobia on deputation to work above water.
- ii) Provisions for the safe performance of work over or in close proximity to water should include, where appropriate, the provision and use of suitable and adequate:
 - a) fencing, safety nets and safety harnesses;
 - b) lifebuoys, life jackets and manned boats;
 - c) protection against such hazards as reptiles bushes/ polluted water and other animals.
 - d) deputation of lifeguards/divers.
- iii) Gangways, pontoons, bridges, footbridges and other walkways or work places over water should:
 - a) possess adequate strength and stability;
 - b) be sufficiently wide to allow safe movement of workers;
 - c) have level surfaces free from tripping hazards;
 - d) be adequately lit when natural light is insufficient;
 - e) where practicable and necessary, to prevent danger, be provided with toe-boards, guard rails, hand ropes etc.
 - f) be secured to prevent dislodgment by rising water or high winds;
 - g) if necessary, be equipped with ladders which should be sound, of sufficient strength and length and be securely lashed to prevent slipping.

	OISD – GDN – 192	Page No. 52
	SAFETY PRACTICES DURING CONSTRUCTION	

- iv) All deck openings including those for buckets should be fenced.
- v) All the employees (owner, contractor and contractor workers) working above and under the water should comply with the requirements of Standards of Training, Certification and Watchkeeping 95 (STCW 95).


6.16.2 Rescue & Emergency procedures

- i) Persons who work over water should be provided with some form of buoyancy aid. Life jackets should be provided for sufficient freedom of movement, have sufficient buoyancy to bring persons to the surface and keep them afloat face upwards, be easily secured to the body, be readily visible by way of self luminous paint/strip.
- ii) Nobody should work alone on or above water.
- iii) Each worker should be trained in the procedure to be followed in the event of an emergency.
- iv) Necessary rescue arrangements like divers, rescue boats etc to be in place.
- v) Persons to be trained for CPR/ Artificial resuscitation as an first aid to the rescued person.
- vi) Also for off shore operations. Speed of water current and water temperature to be considered.

7.0 ADDITIONAL SAFETY PRECAUTION FOR UNITS WITH HYDROCARBONS

In addition to general safety precautions as outlined above for the activities in Clause 6.0, following additional safety precautions need to be taken for the sites within the operating area or nearby, where presence of Hydrocarbons cannot be ruled out.

- i) No job shall be carried out without a valid permit. Permit should be in line with OISD-STD-105 "Work Permit System".
- ii) Smoking should be prohibited in all places containing readily combustible or flammable materials and "No Smoking" notices be prominently displayed.
- iii) In confined spaces and other places where flammable gases, vapours or dusts can cause danger, following measures should be taken:
 - (a) only approved type electrical installations and equipment, including portable lamps, should be used;
 - (b) there should be no naked flames or source of ignition;
 - (c) oily rags, waste and clothes or other substances liable to spontaneous ignition should be removed without delay to a safe place;
 - (d) Air operated ventilation system should be provided.
- iv) Regular inspections should be made of places where there are fire risks. These include the vicinity of heating appliances, electrical installations and conductors, stores of flammable and combustible materials, welding and cutting operations.
- v) Welding, flame/gas cutting and other hot work should only be done after issuance of work permit in line with the requirement of OISD-STD-105

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 53</p>
--	--	---


after appropriate precautions, as required, are taken to reduce the risk of fire. For carrying out other jobs also, OISD-STD-105 should be followed strictly.

- vi) Fire-extinguishing equipment should be well maintained and inspected at suitable intervals by a competent person. Access to fire-extinguishing equipment such as hydrants, portable extinguishers and connections for hoses should be kept clear at all times.
- vii) All supervisors and workers should be trained in the use of fire-extinguishing equipment, so that adequate trained personnel are readily available during all working periods.
- viii) Audio means to give warning in case of fire should be provided where this is necessary to prevent danger. Such warning should be clearly audible in all parts of the site where persons are liable to work. There should be an effective evacuation plan so that all persons are evacuated.
- ix) Notices should be posted at conspicuous places indicating:
 - (a) the nearest fire alarm;
 - (b) the telephone number and address of the nearest emergency services.
- x) The work site shall be cleared of all combustible materials, as Sparks and molten metal coming from the welding job can easily ignite combustible materials near or below the welding site. If the combustible materials cannot be removed from the area, the same shall be properly shielded.
- xi) A dry chemical type fire extinguisher (DCP) shall be made available in the work area. Also fire protection facilities like running hoses etc. as per permit should be complied with.
- xii) Wherever required, welding screens shall be put up to protect other equipment in adjoining areas against flying sparks. Material used should be metal/ fire proof blanket/water curtain.
- xiii) Welding or cutting of vessels/ equipments used in Hydrocarbon/ hazardous flammable chemicals shall be done after ensuring hydrocarbon free area and verifying the same with the suitable hydrocarbon detector.
- xiv) The confined space/equipment shall be made gas free (hydrocarbon and toxic) and cleaned and shall be ensured, with the help of suitable gas detectors.
- xv) Used and hot electrode stubs shall be discarded in a metal bucket.
- xvi) Use PESO approved and certified spark arrestors for vehicles, wherever applicable.
- xvii) Relevant work permit (hot work, cold work, vessel entry etc. as the case maybe) to be obtained, if construction work is carried out within existing operating area.
- xviii) Precaution against pyrophoric material shall be ensured.

8.0 Environment Protection

8.1 Waste

The contractor is required to develop, institute and maintain a Waste Management Programme (WMP) during the construction of the project for his works and obtain approval of the owner. WMP may include: -

	OISD – GDN – 192	Page No. 54
	SAFETY PRACTICES DURING CONSTRUCTION	

- i) Identification of disposal sites.
- ii) Identification of waste/surplus quantities to be disposed off.
- iii) Identification of amounts intended to be stored temporarily on site location of such storage.
- iv) Use of proper PPEs.
- v) Identification of intended transport means and route.
- vi) Obtaining permission, where required, for disposal.

Such a mechanism is intended to ensure that the designation of areas for the segregation and temporary storage of reusable and recyclable materials are incorporate into the WMP. The WMP should be prepared and submitted to the Engineer for approval.

The Contractor shall handle waste in a manner that ensures they are held securely without loss or leakage thus minimizing potential for pollution and fire. The Contractor shall maintain and clean waste storage areas regularly.

The Contractor shall make arrangement to stack the metal scrap at designated location and maintain the site free from obstruction. The scrap to be disposed as per owner instruction at regular interval.

8.2 Hazardous Waste Management

If encountered or generated as a result of Contractor's activity, then waste classified as hazardous under the "Hazardous Wastes (Management & Handling) Rules, 1989, and amendments thereunder time to time" shall be disposed off in a manner in compliance with the procedure given in the rules under the aforesaid act.


Chemicals classified as hazardous chemicals under "Manufacture, Storage and Import of Hazardous Chemical Rules, 1989 of Environment (Protection) Act, 1986 (latest) shall be disposed off in a manner in compliance with the procedure given in the rules under the aforesaid act.

8.3 Air Quality

The Contractor shall take all necessary precautions to minimise fugitive dust emissions from operations involving excavation, grading, and clearing of land and disposal of waste. He shall not allow emissions of fugitive dust from any transport, handling, construction or storage activity to remain visible in atmosphere beyond the property line of emission source for any prolonged period of time without notification to the Employer.

The Contractor shall use construction equipment designed and equipped to minimise or control air pollution. He shall maintain evidence of such design and equipment and make these available for inspection by Employer.

If after commencement of construction activity, Employer believes that the contractor's equipment or methods of working are causing unacceptable air pollution impacts then these shall be inspected and remedial proposals shall be drawn up by the Contractor, submitted for review to the Employer and implemented.

	OISD – GDN – 192 SAFETY PRACTICES DURING CONSTRUCTION	Page No. 55
--	--	-------------

The Contractor shall maintain the MSDS of the chemicals used / stacked at site and same shall be handled as per the standard prescribed procedure. The quantity shall be stored strictly as per the norms and emergency handling procedure shall be known and displayed prominently.

8.4 Noise

The Contractor shall consider noise as an environmental constraint in his design, planning and execution of the Works and provide demonstrable evidence of the same. The Contractor shall, take all appropriate measures to ensure that work carried out by the Contractor, whether on or off the Site, will not cause any unnecessary or excessive noise.

8.5 Occupational Noise

- i) Protection against the effects of occupational noise exposure should be provided when the sound levels exceed the threshold values as prescribed.
- ii) When employees are subjected to expose the sound levels beyond the prescribed limit, feasible administrative or engineering controls should be ensured.
- iii) If such controls fail to reduce sound levels within the levels, personal protective equipment shall be provided and used to reduce sound levels within the prescribed limit.

9.0 OCCUPATIONAL HEALTH

9.1 Medical Examination


The contractor shall arrange a medical examination of all his employees before employing, after illness or injury, if it appears that the illness or injury might have affected his fitness and, thereafter, at periodicity stipulated under Factories Act / Building & Construction Workers Regulation (BOCWR).

The Contractor shall maintain the confidential records of medical examination by the physician authorized by the Employer.

9.2 Occupational Health Centre

The contractor shall ensure at a construction site an occupational health centre, mobile or static is provided and maintained in good order. Services and facilities as per the scale lay down under Factories Act / Building & Construction Workers Regulation (BOCWR). A construction medical officer appointed in an occupational health centre possess the qualification as laid down under Factories Act / Building & Construction Workers Regulation (BOCWR).

9.3 First Aid

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 56</p>
--	--	---

First aid facilities should be provided in line with various statutory regulations like The Factory Act etc. However following care should be taken:

- i) First aid, including the provision of trained personnel should be ensured at work sites. Arrangement should be made for ensuring the medical attention of the injured workers.
- ii) Suitable rescue equipment, like stretchers should be kept readily available at the construction site.
- iii) First-aid kits or boxes, as appropriate and as per statutory requirements, should be provided at workplaces and be protected against contamination by dust, moisture etc.
- iv) First-aid kit or boxes should not contain anything besides material for first aid in emergencies.
- v) First-aid kits and boxes should contain simple and clear instructions to be followed, be kept under the charge of a responsible person qualified to render the first aid and be regularly inspected and replenished.
- vi) Where the work involves risk of drowning, asphyxiation or electric shock, first-aid personnel should be proficient in the use of resuscitation and other life saving techniques as specified in rescue procedures.
- vii) Emergency telephone numbers of nearby Hospitals, Police, Fire Station and Administration should be prominently displayed.

10.0 DOCUMENTATION

The intention of keeping documentation of all types of accident(s) is to prevent recurrence of similar accident(s). All accidents should be reported as per OISD Guidelines and The Factories Act, 1948/ BOCWR.

All accidents (major, minor or near miss) should be investigated, analysed and recommendations should be documented along with implementation status.


All related data should be well-documented and further analysis highlighting the major cause(s) of accidents be done. This will help in identifying thrust areas and training needs for prevention of accidents.

11.0 SAFETY AWARENESS & TRAINING

Safety awareness to all section of personnel ranging from site-in-charge to workmen helps not only preventing the risk but also build up the confidence. Time and expenditures also get saved as a result.

Safety awareness basically seeks to persuade/inform people on safety besides supplementing skill also. Awareness programme may include followings:


- i) **Poster:** Posters with safety slogan in humorous, gruesome demonstrating manner may be used to discourage bad habits attributable to accidents by appealing to the workers' pride, self-love, affection curiosity or human aspects. These should be displayed in prominent location(s).

	OISD – GDN – 192 SAFETY PRACTICES DURING CONSTRUCTION	Page No. 57
--	--	-------------

- ii) **Safety Sign Boards:** Different type of message of cautioning, attention, notice etc. should be displayed at the appropriate places for learning/awareness of the workmen while working at site.
- iii) **Films & Slides:** Film(s) narrating the accident case study including the causes and possible remedial ways of preventing the recurrence of a similar accident should be displayed at regular intervals. Slides consisting main points of the film show may also be shown to workers.
- iv) **Talks, lectures & conferences:** The success of these events would depend much on audience's understandings of the speaker (s). The speakers are to be knowledgeable and good presenter. Speakers should know to hold the attention and to influence the audiences.
- v) **Competitions:** Organise competition(s) between the different deptts/categories of workers. The sense of reward/recognition also will improve safety awareness and result in enhancing safety levels.
- vi) **Exhibitions:** Exhibitions also make the workers acquainted with hazards and means of preventive measures.
- vii) **Safety Publication:** Safety publications including pocket books dealing with ways of investigation and prevention in the field of safety and so on, may be distributed to workers to promote the safety awareness.
- viii) **Safety Drives:** From time to time, an intensive safety drive by organising a safety day or a safety week etc. should be launched.
- ix) **Training:** Training for covering the hazards for different trade should be imparted. Training should also include the specific hazards related to a job in addition to the general safety training as has been dealt in various chapters and should include all workers. Reference may be drawn from OISD-STD-154.

12.0 REFERENCES


- i) *Factory Act, 1948*
- ii) *Indian Electricity Rules*
- iii) *Safety & Health in Construction by ILO*
- iv) *The Building & Other Construction Workers (Regulation, Employment and Conditions of Service) Act 1996 and Central Rules 1998*
- v) CSB guidelines
- vi) *IS 1161: 2006 or latest edition - Steel tubes for structural purposes — specification*
- vii) *IS 2750: 1964 or latest edition - Specification for steel scaffolding.*
- viii) *IS : 3696 (Part 1) – 1987 (Scaffolds) Safety code of scaffolds and ladders*
- ix) *IS : 3696 (Part 2) – 1987 (Ladders) Safety code of scaffolds and ladders*
- x) *IS 4014 Part I: 2006 or latest edition - Code of practice for steel tubular scaffolding - definitions and materials.*
- xi) *IS 4014 Part II: 2005 or latest edition - Code of practice for Steel tubular scaffolding - Safety regulations for scaffolding.*
- xii) *Building & Other Construction Workers(Regulation on employment & conditions of service) central rules, 1998 (Provision related to Scaffold).*
- xiii) *OHSA Standard on Scaffold (CFR 1926.452)*

	<p style="text-align: center;">OISD – GDN – 192</p> <p style="text-align: center;">SAFETY PRACTICES DURING CONSTRUCTION</p>	<p style="text-align: right;">Page No. 58</p>
--	--	---

ANNEXURE I

**LIST OF SAFETY CODES FOR CIVIL WORKS PUBLISHED BY BUREAU OF
INDIAN STANDARDS**

Sr.no	Code No.	Title
01.	IS : 818	Code of Practice for Safety and Health Requirements in Electric and Gas Welding and Cutting Operations – First Revision.
02.	IS : 875	Code of practice for Structural safety of buildings: Masonry walls
03.	IS : 933	Specification for Portable Chemical Fire Extinguisher, Foam Type – Second Revision.
04.	IS : 1179	Specification for Equipment for Eye and Face Protection during Welding – First Revision.
05.	IS : 1904	Code of practice for Structural safety of buildings: Shallow foundations
06.	IS : 1905	Code of practice for Structural safety of buildings: Masonry walls
07.	IS : 2171	Specification for Portable Fire Extinguishers, Dry Powder Type – Second Revision.
08.	IS : 2361	Specification for Building Grips – First Revision.
09.	IS : 2750	Specification for Steel Scaffoldings.
10.	IS : 2925	Specification for Industrial Safety Helmets – First Revision.
11.	IS : 3016	Code of Practice for Fires Precautions in Welding and Cutting Operations – First Revision.
12.	IS : 3521	Industrial safety belts and harnesses
13.	IS : 3696 – Part I	Safety Code for Scaffolds and Ladders : Part I – Scaffolds.
14.	IS : 3696 – Part II	Safety Code for Scaffolds and Ladders : Part II – Ladders.
15.	IS : 3764	Safety Code for Excavation Work.
16.	IS : 4014 -Part I & II	Code of practice for Steel tubular scaffolding
17.	IS : 4081	Safety Code for Blasting and Related Drilling Operations.
18.	IS : 4082	Recommendations on staking and storage of construction materials at site
19.	IS : 4130	Safety Code for Demolition of Buildings – First Revision.
20.	IS : 4138	Safety Code Working in Compressed Air-First Revision
21.	IS : 4756	Safety code for Tunneling works
22.	IS : 4912	Safety requirements for Floor and Wall Openings, Railings and toe Boards –First Revision.
23.	IS : 5121	Safety Code for Piling and other Deep Foundations.
24.	IS : 5916	Safety Code for Construction involving use of Hot Bituminous Materials.
25.	IS : 5983	Specification for Eye Protectors – First Revision.
26.	IS : 6922	Structures subject to underground blasts, criteria for safety and design of
27.	IS : 7155	Code of recommended practices for conveyor safety
28.	IS : 7205	Safety Code for Erection on Structural Steel Works.

	OISD – GDN – 192 SAFETY PRACTICES DURING CONSTRUCTION	Page No. 59
--	--	-------------

Sr.no	Code No.	Title
29.	IS : 7069	Safety Code for Handling and Storage of Building Materials.
30.	IS : 7293	Safety Code for Working with Construction Machinery.
31.	IS : 7323	Guidelines for operation of Reservoirs
32.	IS : 7969	Safety code for handling and storage of building material
33.	IS : 8758	Recommendation for Fire Precautionary Measures in construction of Temporary Structures and Pandals.
34.	IS : 8989	Safety Code for Erection of Concrete Framed Structures.
35.	IS : 9706	Code of Practices for construction of Arial ropeways for transportation of material
36.	IS : 9759	Guidelines for de-watering during construction
37.	IS : 9944	Recommendations on safe working load for natural and man-made fibre rope slings
38.	IS : 10291	Safety code for dress divers in civil engineering works
39.	IS :10386 – Part I	Safety Code for Construction, Operation and Maintenance for River Valley Projects.
40.	IS :10386 – Part II	Safety Code for Construction, Operation and Maintenance of River Valley Projects.
41.	IS : 11057	Code of practice for Industrial safety nets
42.	IS : 13415	Code of Practice on safety for Protective barriers in and around building
43.	IS : 13416	Recommendations for preventive measures against hazards at working places