

Name of Work:- Remodeling of Storm Water Drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road from Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)

I N D E X		
S. No.	PARTICULARS	PAGES
1	Index	1
2	Notice Inviting Tender	2
3	Press Notice	3-7
4	Brief Particulars of the work	8-10
5	Guidelines/Procedure For 'E' Procurement.	11
6	Instructions To Tenderers for Submission of Tenders	12
7	Form PWD-6	13-18
8	Percentage Rate Tender (Form CPWD-7)	19-21
9	Performa for Receipt of Deposition of Original EMD	22
10	Form A to K	23-38
11	Schedule A To F	39-44
12	Integrity Pact	45-51
13	General Specifications	52-53
14	Special Conditions	54-55
15	General Conditions	56-72
16	Additional Conditions	73-76
17	Particular Specification	77
18	Condition for RMC and Design Mix Concrete	78-84
19	Special Conditions for Cement, Steel & RCC work	85-93
20	Important Conditions for Drain work	94-95
21	General Specifications for RCC U Shape Pre-Cast Drain	96-98
22	Brief Specifications Of Precast Manufacturer	99-104
23	(TABLE-1) Equipment's for Testing of Materials of Concrete at Site Laboratory	105-106
24	Conditions for Security Deposit	107-108
25	Special condition for submission of final bill by contractor for road works	109
26	Special Condition of National Green Tribunal (NGT)	110
27	Special Condition for Malba Disposal	111
28	Special Condition for Prevent Air Pollution	112
29	Condition for Material and Quality Assurance, Safety Measures	113-115
30	List of Approved Institute/Laboratory for Design Mix / Job Mix	116
31	List of Preferred Make	117-118
32	Additional APG circular No. F.dspwd-2/E-343137/1895-1901 dated 20.05.2026	119-121
33	DRAWINGS : Typical Cross Section of RCC Precast drain and Precast Lid	122
34	Schedule Of Quantity	123-129

NOTICE INVITING TENDER

NIT No.:	16/CE/North/PWD/2026-27
Name of Work: -	Remodeling of Storm Water Drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)
Estimated Cost	Rs. 32,94,84,990/-
Earnest Money	Rs. 44,94,850/-
Performance Guarantee	5% of the Estimated cost put to tender (ECPT) or Contract Amount whichever is higher + APG
Additional Performance Guarantee	Amount equivalent to the difference between the 80% amount of ECPT and quoted amount
Security Deposit	2.50 % of tendered value
Time Allowed	5 (Five Months)
Certified that this NIT contains 129 pages (Serial numbered 1 to 129 pages).	

NIT amounting to Rs. 32,94,84,990/- (Rs. Thirty Two Crore Ninety Four Lakh Eighty Four Thousand Nine Hundred Ninety Only) is hereby approved.

**Assistant Engineer (P)
North Maintenance Zone**

**Executive Engineer (P)
North Maintenance Zone**

Approved

**Chief Engineer
North Maintenance Zone**

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

PRESS NOTICE

The Executive Engineer, PWD, Division West Roads -1, R. R. Lines, Dhaula Kuan, Delhi 110010 "For & on behalf of President of India", invites online Percentage Rate tenders in **Two Bid System** from eligible contractors enlisted in B & R category with CPWD as well as other (Non-CPWD) experienced contractors who fulfill eligibility criteria.

The bid form and other details can be obtained from the website <https://govtprocurement.delhi.gov.in>.

S. No.	Name of Work	Estimated Cost	Earnest Money	Time Allowed	Date & Time of Prebid conference	Date of release of tender through e-procurement	Last Date and Time of receipt of tenders through e-procurement	Date and Time of opening of Tender
1	Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.) NIT No: 16/CE/North/PWD/2026-27 Tender No.	Rs. 32,94,84,990/-	Rs. 44,94,850/-	5 (Five Months)	09.06.2026 at 2:00 PM	06.06.2026	15.06.2026 3.00 P.M.	15.06.2026 3.30 P.M.

The enlistment of the contractors should be valid on the last date of submission of tenders. In case only the last date of submission of tender is extended, the enlistment of contractor should be valid on the original date of submission of tenders. Joint venture is not allowed.

Eligibility Criteria:-

For CPWD enlisted contractors:-

Valid CPWD Registration Certificate of appropriate category as on last date of tender. All the link papers / circulars / orders / OM's required to establish the link of validity of registration as on last date of tender, in case if the original registration order validity expired before the last date of tender, must be uploaded in sequence to establish the registration validity as on last date of tender. In case of non-uploading of required documents, the eligibility will not be considered.

For CPWD as well as Non-CPWD contractors :

The eligible bidder should have satisfactorily completed the works as mentioned below during the last seven years ending last day of the month previous to the one in which tenders are invited:-

Three similar works each costing not less than of Rs. 13,17,93,996/-

OR

Two similar works each costing not less than of Rs. 19,76,90,994/-

OR

One similar works each costing not less than of Rs. 26,35,87,992/-

Similar work shall mean "**Work in any infrastructure/Building Project**"

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

The value of executed work shall be brought to current costing level by enhancing the actual value of work at simple rate of 7% per annum; calculated from the date of completion to previous day of the last day of submission of tenders.

Performance certificate of work in (Form-C) attached should be issued by an officer not below the rank of EE or an equivalent officer.

1. **Additional Performance Guarantee in case of abnormally low bids : A bid shall be treated as abnormally low if the quoted bid amount is lesser than 80% of the estimated cost put to tender (ECPT). In cases of abnormally low bids, the bidder shall be required to submit an Additional Performance Guarantee in addition to the standard Performance Guarantee (PG) as per the following structure :**

Percentage Below ECPT	Additional Performance Guarantee to be submitted
Quoted bid amount is lesser than 80% of the ECPT N	The amount of Additional Performance Guarantee (APG) shall be equivalent to the difference between the 80% amount of ECPT and quoted amount. (e.g. if ECPT is A and quoted amount is 0.7A then the amount of APG shall be $0.8A - 0.7A$)

NOTE:- The APG shall be in the form of Bank Guarantee or other acceptable form as per existing CPWD guidelines and must be submitted within the time frame prescribed for Performance Guarantee. Additional Performance Guarantee shall be submitted in favour of **Executive Engineer, PWD M-111, R.R. Lines, Dhaula Kuan, New Delhi-110010** (as per Circular no. **F.dspwd-2/E-343137/1895-1901 dated 20.05.2026 issued by the Deputy Secretary (PWD), PWD Secretariat**)

- 1.1 (i) Should have had Average Annual Financial Turnover of **Rs. 9,88,45,497/-** on works during the last three years ending 31st March 2025 (Scanned copy of Certificate from CA with Unique Document Identification Number (UDIN) to be uploaded). The value of annual turnover figures shall be brought to the current value by enhancing the actual turnover figures at simple rate of 7% per annum. **(for Non-CPWD contractors only)**
- (ii) Should not have incurred any loss (profit after tax should be positive) in more than two years during available last five years ending 31st March 2025 consecutive balance sheet (balance sheet in case of private/public limited company means its standalone financial statement and consolidated financial statement both), duly audited and certified by the Chartered Accountant (Form A). **(For Non-CPWD enlisted contractors).**
- (iii) Should have a Banker's Certificate from a commercial Bank for **Rs. 13,17,93,996/-** (Form B)
Or
Net Worth certificate from CA with Unique Document Identification Number (UDIN) of minimum 10% amount of ECPT (scanned copy of original to be uploaded) (Form B-1). **(For Non-CPWD enlisted contractors).**
2. Bidding Capacity (applicable for CPWD enlisted contractors also): The bidding capacity of the contractor should be equal to or more than the estimated cost of the work put to tender. Bidding capacity shall be worked out by the following formula:
Bidding Capacity = $\{[A \times N \times 1.5] - B\}$
Where,
A = Maximum turnover in construction works executed in any one year during the last seven years taking into account the completed as well as works in progress. The value of completed works shall be brought to current costing level by enhancing at a simple rate of 7% per annum.
N = Number of years prescribed for completion of work for which bids have been invited. If Number of years prescribed for completion of work is less than one year, it should be taken as N=1.
B = The Value of existing commitments and ongoing works to be completed during the period of completion of work for which bids have been invited.

Note: The bidder should submit bidding capacity as per Form 'C-3'.

3. The intending bidder must read the terms and condition of **CPWD-6** carefully. He should only submit his bid if he considers himself eligible and he is in possession of all the documents required.
4. This information and instructions for bidders posted on website shall form part of bid document.
5. But the bid can only be submitted after deposition of original EMD in the form of Insurance Surety Bonds, Account Payee Demand Draft, Fixed Deposit Receipt (FDR), Bankers cheque or Bank Guarantee (as prescribed from any of the Commercial Bank) drawn in favour of **Executive Engineer, PWD M-111, R.R. Lines, Dhaula Kuan, New Delhi-110010**, shall be scanned and uploaded to the e-tendering website within the period of bid submission. The original EMD should be deposited either in the office of Executive Engineer inviting bids or division office of any Executive Engineer, PWD (GNCTD) within the period of bid submission. (The EMD document shall only be issued from the place in which the office of receiving division office is situated). The EMD receiving Executive Engineer shall issue a receipt of deposition of earnest money deposit to the bidder in a prescribed format **(as given on Page No. 22)** uploaded by tender inviting EE in the NIT. The receipt shall also be uploaded to the e-tendering website by the intending bidder upto the specified bid submission date and time.
6. The bid document consisting of plans, specifications, the schedule of quantities of various types of items to be executed and the set of terms and conditions of the contract to be compiled with and other necessary documents can be seen and downloaded from <https://govtprocurement.delhi.gov.in>
7. Those contractors who are not registered or have not updated their profile on the website mentioned above, are required to get registered/update their profile beforehand.
8. The intending bidder must have valid Class-III digital signature to submit bid.
9. On opening date, the contractor can login and see the bid opening process. After opening of bids, he will receive the competitor bid sheets.
10. Contractor can upload documents in the form of JPG format and PDF format.
11. Pre-bid conference shall be held in the chamber of Chief Engineer, North Maint. Zone, PWD (GNCTD), at 5th Floor, MSO Building, I.P. Estate, New Delhi-110002 on **09.06.2026** to clear the doubt of intending bidders, if any.
12. Contractor must ensure to quote rate in the prescribed column(s) meant for quoting rate in figures appears in pink colour and the moment rate is entered, it turns sky blue.

In addition to this, while selecting any of the cells a warning appears that if any cell is left blank the same shall be treated as "0". Therefore, if any cell is left blank and no rate is quoted by the bidder, rate of such item shall be treated as "0" (ZERO).

However, if a tenderer quotes nil rates against each item in item rate tender or does not quote any percentage above/below on the total amount of the tender or any section / sub head in percentage rate tender, the tender shall be treated as invalid and will not be considered as lowest tenderer.

Tender documents shall be considered valid of only those contractors who will upload the scanned copies of the following documents along with tender:

- (i) Copy of receipt for deposition of original EMD to any division office of PWD (GNCTD) and scanned copy of original EMD.
- (ii) Valid contractor's registration/enlistment order (**for enlisted CPWD contractors only**).
- (iii) A certificate of work experience issued by an officer not below the rank of Executive Engineer or equivalent has to be uploaded in support of similar work experience as per **Form - "C & D" – applicable to all CPWD as well as Non-CPWD Contractors**
- (iv) Bidding Capacity (Form-C-1, C-2 & C-3)
- (v) Affidavit on non judicial stamp paper of Rs. 100/- for **Format – F, Format -G, Format-H, Format-I** and an Undertaking For Site Inspection as per Form-K
- (vi) The Copy of GST Registration Certificate of the State in which the work is to be taken up, if already obtain by the bidder. If the bidder has not obtained GST Registration in the state in which the work is to be taken up, or as required by GST authorities then in such a case the bidders shall scan and upload following undertaking along with other bid document. *"If work is awarded to me, I/we shall obtain GST Registration certificate of the state, in which work is to be taken up, within one month from the date of receipt of award letter or before release of any payment by PWD, whichever is earlier, failing which I/we shall be responsible for any delay in payments which will be due towards me/us on a/c of the work executed and/or for any action taken by PWD or GST Department in this regard"*.
- (vii) Copy of PAN Card issued by Income Tax Department.
- (viii) Bidders are required to upload the NIT in PDF as uploaded by EE. This will satisfy digital signing of the terms and condition of the NIT by the bidder.
- (ix) The agency has to upload details such as: - Proprietor name, Mobile No., e-Mail ID, Correspondence address on their letter pad duly signed.
- (x) Letter of Transmittal as per Form-J. (Not applicable to bidder having enlistment in appropriate class & category as per II above).
- (ix) Certificate of Financial Turnover from C.A. (Form A).(Not applicable to bidder having enlistment in appropriate class & category as per II above).
- (xi) Banker's Certificate (Form B) or Net Worth Certificate (Form B-1) (Not applicable to bidder having enlistment in appropriate class & category as per II above).

Certified copy of all the scanned and uploaded documents as specified in CPWD-6 shall have to be submitted by the lowest bidder only within a week of opening of tender, physically in the office of bid opening authority.

After acceptance of tender, the agency will submit, by at least Three days before stipulated date of start of work an MOU with Precast RCC U shape Drain manufacturer who fulfil the conditions specified in General specifications for RCC U shape pre-cast drain at P-93&94 of NIT and get it approved by competent authority failing which performance guarantee along with APG shall be forfeited.

Online financial bid submitted by intending bidders shall be opened only of those bidders, whose

original Earnest Money Deposit deposited with any division office of PWD, Delhi and other scanned and uploaded documents are found in order.

The bid submitted shall become invalid or financial bid shall not be opened if :

1. The bidder is found ineligible.
2. The bidder does not deposit original EMD with division office of any Executive Engineer, PWD GNCTD (The EMD documents shall only be issued from the place in which the office of receiving division office is situated or the earnest money declaration).
3. The bidder does not upload all the documents (including GST Registration) as stipulated in the bid document including the copy of receipt for deposition of original EMD.
4. If any discrepancy is noticed between the documents as uploaded at the time of submission of bid and hard copies as submitted physically by the lowest bidder in the office of tender opening authority.
5. Any document as required in this tender document.

The tender document consisting of plans, specifications, the schedule of quantities of various types of items to be executed and the set of terms and conditions of the contract to be complied with and other necessary documents can be seen from the website <https://govtprocurement.delhi.gov.in>

**Executive Engineer
Division West Road -1, PWD,
R. R. Lines, Dhaula Kuan,
Delhi 110010**

BRIEF PARTICULARS OF THE WORK

Scope of Work:

Scope of work of this tender is mainly Remodeling of storm water drain as per New Master Drainage Plan 2025 of Lal Sai Marg (From Jail Road to Pankha Road (Both Side) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)

This also includes:

1. During construction of drains parallel access has to be provided to general public without any hindrance at all location as per direction of Engineer in Charge.
2. For construction of footpath, guidelines of UTTIPEC pack have to be followed.
3. The scope of work includes execution of work & services and handing over the assets after making them usable and functional in all aspects. The work is to be executed as per BOQ attached. The cost of labour, material, tools and plants and machinery required for execution of the whole project as per Layout plan & detailed design and drawings to be approved, specifications etc. is within the scope of this work by the agency their own cost, nothing extra shall be paid on this account.
4. Details Layout Plan, Cross sectional details have to be prepared by successful bidder which has to be approved by the department as per requirement before proceeding for the execution of work on ground. Similarly detail survey of drains has to be carried out by the successful bidder after award of the work. The successful bidder has to co-relate the approved drawing and his drain survey report with the drain survey report prepared by M/s Haskoning (Consultant hired by the department for preparing Master drainage plan). If any discrepancy found, it has to be brought in the knowledge of Engineer-in-Charge, to get the rectified and approved proposed drainage drawing from the consultant M/s Haskoning. No claim whatsoever will be entertained in this regard.
5. In addition,
 - (i) In case of cast-in-situ drain construction, successful bidder has to prepare the structural drawings from approved structural consultant and get vetted the drawings from IIT, Delhi /any Govt. Institute as and when desired by the Engineer-in-Charge as per requirement of the site and the cost of vetting if any occurred, shall be borne by the department.
 - (ii) In case of pre-cast drain construction, successful bidder has to obtain the drawings from approved manufacturers and get vetted the drawings from IIT, Delhi /any Govt. Institute and the cost of vetting if any occurred, shall be borne by the department..
6. All works has to be executed as per Drawings Issued by Engineer in Charge, specifications provided in the bid document, CPWD Specifications Vol-I &Vol.II and National Building Codes 2016 (in case of difference if any, stringent / higher specification of the two shall be followed. In absence of CPWD Specification, IS Codes, MoRTH Specifications, National Building Code 2016, Specifications, sound engineering practices shall be adopted as per order of precedence defined in the contract.
7. The scope of works & specification are given in general but they are not exhaustive i.e. does not mention all the incidental works required to be carried out for complete execution of the item of work. The work shall be carried out, all in accordance with true intent and meaning of the specifications and the drawings taken together, regardless of whether the same may or may not be particularly shown on the drawings and/ or described in the specifications, provided that the same can be reasonably inferred there from. There may be several incidental works, which are not mentioned in the contract document/specifications but will be necessary to complete the item in all respect.
8. In case, some of items are missing in the scope of work or specifications in the bidding documents same shall be taken from the specification mentioned in similar type of items mentioned for similar

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

type of buildings in the scope of work or shall be executed as given in the CPWD Specifications, NBC-2016, IS Codes or according to sound engineering practices so as to make the building including related services fully functional. No claim what so ever may be entertained at later stage. All cost of providing and making buildings with services, landscape and horticulture works fully complete in all aspect unless specifically mentioned in the contract document and making buildings with services fully functional are included in the cost tendered for this work.

9. The scope of work also includes preliminary works like setting and maintenance of permanent bench marks reference points, central line of the carriageway etc. It shall also include making adjustment in the layout if required as per site conditions and as directed by the Engineer-in-Charge. The layout shall be got approved from the Engineer-in-charge before starting actual work. Existing levels of the area under the scope of work shall also be recorded.
10. Clearing of site for construction of the work and all activities connected therewith before commencement of work to the satisfaction of the Engineer-in-Charge.
11. All the exposed concrete surfaces shall have shutter or form liner finish (except for piles and lean concrete) and nothing shall be paid extra for the same.
12. Maintenance of all works during construction till handing over to the Department
13. Protection and maintenance of existing services.
14. Provision for all safety measures for traffic, pedestrian workmen, machinery etc. as considered necessary by the Engineer-in-Charge.
15. Identification of services like sewer lines, water supply lines, electric and telephone cables etc. well in advance of actual execution.
16. It may be noted that all the safety requirements as may be felt necessary by the Engineer-in-Charge, shall have to be provided for allowing the traffic to pass underneath the superstructure at all times during the construction period.
17. In case of defective construction by the contractor or on account of any other reason attributable to the contractor if the consultants appointed by the department, submit additional claims for re-designing on account of additional input by them, due to such reasons, the same shall also be borne by the contractor. The opinion of the Engineer-in-charge in these matters shall be final and binding.
18. All ancillary and incidental facilities required for execution of the work i.e. labour camps, stores, offices for contractors, work shop facilities, watch and ward, temporary structure for plants and machinery, well equipped. site laboratory as mentioned in the tender; document, water storage structure, tube wells, electric /telephone installation and charges, liaison work, protection work during execution and not included in the main items, any other item /activity contained elsewhere in the tender documents which is necessary for execution of work in the opinion of the Engineer-in-Charge.
19. Pumping and bailing out water in suitable manner as directed by Engineer-in-Charge and nothing shall be payable for this.
20. Intending tenderer must visit the sites of work and physically assess the activities which are involved for completing the work, including the quantum of work besides the information supplied in the tender document. No claim whatsoever shall be entertained on this account.
21. The contractor shall make arrangement for a regular fortnightly or other frequency as desired by Engineer-in-Charge for the documentation of the progress of work.

CORRECTION-----NIL-----
 DELETION----- --NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

22. Activities related to setting of various items such as permanent bench-marks, reference points, central line of carriageway, layout of foundations and bearings etc. shall be performed by total station survey.
23. Services like water supply lines, sewer lines, storm water drains, electricity lines, telephone lines, overhead and underground cables /structure, if any falling in the alignment of the work (which are required to be removed or shifted in the opinion of the Engineer-in-Charge) shall be removed /shifted by the department if found necessary by the Engineer-in-Charge. Time taken for its shifting, removal, and diversion shall be accounted for towards according extension of times if it actually causes hindrance in execution of the work as per discretion of the Engineer-in-Charge. No claim for delay or otherwise due to above reasons shall be entertained on this account.
24. The Agency /Contractor will make his own arrangement for stacking /stock yard of Precast RCC Drain / Precast RCC Elements in the vicinity of place of execution of work /installation of drain if any. No payment shall be made for keeping stock yard and transportation of Precast Drain from stock yard to work site.
25. **The contractor shall remove the malba on daily basis at his own cost and keep the carriageways & footpaths neat and clean during the execution of the work. In case the Agency fails to remove the malba, the same shall be removed by the department at his risk and cost.**
26. All types of encroachments like trees, ramps, staircase, juggies, tents, khoka, rehri patri etc. to get clearance from local body and to be removed, by the Agency on their cost, nothing extra shall be paid on this account.

Guidelines / Procedure for 'e'- procurement.

1. **Payment of cost of Tender documents:** - The collection of cost of Tender documents is dispensed away with, as there is no physical supply of tender documents and also to have absolute anonymity of the bidders participating in e-procurement solution. The bidders can view / download the tender documents, from the <https://govtprocurement.delhi.gov.in>.
2. **Submission of Bids:** The bidders who are desirous of participating in 'e' procurement shall submit their price bids in the standard formats prescribed in the Tender documents, displayed at <https://govtprocurement.delhi.gov.in>. The bidder should upload the scanned copies of all the relevant certificates, documents etc., in the <https://govtprocurement.delhi.gov.in> in support of their price bids. The bidder shall sign on all the statements, documents, certificates, uploaded by him, owning responsibility for their correctness / authenticity.
3. **Hard Copy :** All affidavits along with supporting documents uploaded with tender should be submitted in original in the office of **Executive Engineer, PWD, Division West Roads -1, R. R. Lines, Dhaula Kuan, Delhi 110010** to verify the same by prescribed date & time. Failure to submit the original before prescribed date will entail rejection of bid.
4. **Payment of Bid Security (Earnest Money Deposit) :** The EMD shall be in the form of the demand draft of scheduled bank / fixed deposit receipt of a scheduled bank issued in favour of **Executive Engineer, PWD M-111, R.R. Lines, Dhaula Kuan, New Delhi-110010** Xerox copy of the DD / FDR is to be scanned and uploaded along with the Bid.
5. **"The physical EMD will be deposited in original with division office of any Executive Engineer PWD, Delhi before opening of financial bid otherwise department may reject the bid of concerned agency"** This EMD receipt shall also be uploaded to the e-tendering website by the intending bidder upto the specified bid submission date and time.
6. **Price Bid Opening:** The Price Bids will be opened online by the concerned officer / officers at the specified date & time and the result will be displayed on the <https://govtprocurement.delhi.gov.in>. which can be seen by all the bidders who participated in the tenders.
7. **Processing of Tenders:** The concerned officer/officers will evaluate and process the tenders as done in the conventional tenders and will communicate the decision to the bidder online.
8. **Payment of Performance Guarantee and Additional Performance Guarantee :** The bidder shall submit irrevocable performance guarantee of 5% (Five percent) and **Additional Performance Guarantee** (In Case of Abnormally Low Bids) Amount Equivalent to the difference between the **80% amount of ECPT** and Quoted Amount, in addition to **Performance Guarantee of 5% of the ECPT or contract amount whichever is higher**, in addition to other deposits mentioned else wherein the contract for his proper performance of the contract. This guarantee shall be in the form of DD / Banker Cheque / pay order / FDR / guarantee bonds of any scheduled bank drawn in favour of **Executive Engineer, PWD M-111, R.R. Lines, Dhaula Kuan, New Delhi-110010**.
9. **Participation of Bidders at the time of opening of bids:** Bidders have two options to participate in tendering process at the time of opening of Bids:
 - (i) Bidders can come at the place of opening of bids (electronically) as done in the conventional tender process.
 - (ii) Bidders can visualize the process online.
10. **Signing of agreement:** After the award of the contract, an agreement shall be signed as done in Conventional Tenders.

**Executive Engineer
Division West Roads -1,
PWD, R. R. Lines, Dhaula Kuan,
Delhi 110010**

INSTRUCTIONS TO TENDERERS FOR SUBMISSION OF TENDERS

1. The tenderers should read all the instructions terms & conditions, contract clauses, nomenclature of items, specifications etc. contained in the tender documents very carefully, before quoting the rates. The tenderer should also read the General conditions of contract for **CPWD Construction Works 2023** with upto date correction slips till submission of price bid which will form a part of the Agreement.
2. Tender should be signed and witnessed of tender documents indicating full address of witness and the names of signatories.
3. Any person who submits a tender shall fill up the usual printed form, stating at what rate he is willing to undertake each item of the work. Tenders, which propose any alteration in the work specified in the said form of invitation to tenders, or in the time allowed for carrying out the work, or which contain any other condition of any sort including conditional rebates, will be summarily rejected.
4. The contractor shall quote his rates keeping in mind the specifications terms & conditions and special conditions etc. and nothing shall be payable extra whatsoever unless otherwise specified.
5. GST & Labour Cess etc. as applicable shall be paid by the contractor himself. The department shall deduct from the R/A bills, the GST as applicable. The contractor shall quote his rates considering all such Taxes.
6. Letter of recommendation for the exemption of Octroi shall be issued by the department on demand. However, the department is not liable to reimburse the Octroi duty in case such exemption certificates are not honoured by the concerned authorities.
7. The tender, which is not duly signed by authorized signatory or is conditional shall be treated as non-responsive and shall be summarily rejected.

PUBLIC WORKS DEPARTMENT
NOTICE INVITING TENDER

The Executive Engineer, PWD, DIVISION WEST ROAD-1, R. R. Lines, Dhaula Kuan, Delhi 110010 "For & on behalf of President of India", invites online Percentage Rate tenders in Two Bid System from eligible contractors enlisted in B & R category with CPWD as well as other (Non-CPWD) experienced contractors who fulfill eligibility criteria for the work:

Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)

The enlistment of the contractors should be valid on the last date of submission of tenders. In case only the last date of submission of tender is extended, the enlistment of contractor should be valid on the original date of submission of tenders. Joint venture is not allowed.

The work is estimated of cost **Rs. 32,94,84,990/-**. This estimate, however, is given merely as a rough guide.

1. **Eligibility Criteria:-**

For CPWD enlisted contractors:-

Valid CPWD Registration Certificate of appropriate category as on last date of Tender. All the link papers / circulars / orders / OM's required to establish the link of validity of registration as on last date of tender, in case if the original registration order validity expired before the last date of tender, must be uploaded in sequence to establish the registration validity as on last date of tender. In case of non-uploading of required documents, the eligibility will not be considered.

For CPWD as well as Non-CPWD contractors and other experience contractors:-

The eligible bidder should have satisfactorily completed the works as mentioned below during the last seven years ending last day of the month previous to the one in which tenders are invited:-

Three similar works each costing not less than of Rs. 13,17,93,996/-

OR

Two similar works each costing not less than of Rs. 19,76,90,994/-

OR

One similar works each costing not less than of Rs. 26,35,87,992/-

Similar work shall mean " **Work in any infrastructure/Building Project** "

The value of executed work shall be brought to current costing level by enhancing the actual value of work at simple rate of 7% per annum; calculated from the date of completion to previous day of the last day of submission of tenders.

- 1.1 (i) Should have had Average Annual Financial Turnover of Rs. 9,88,45,497/- on construction works during the last three years ending 31st March 2025 (Scanned copy of Certificate from CA with Unique Document Identification Number (UDIN) to be uploaded). The value of annual turnover figures shall be brought to the current value by enhancing the actual turnover figures at simple rate of 7% per annum. **(for Non-CPWD contractors only).**

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

(ii) Should not have incurred any loss (profit after tax should be positive) in more than two years during available last five years ending 31st March 2025 consecutive balance sheet (balance sheet in case of private/public limited company means its standalone financial statement and consolidated financial statement both), duly audited and certified by the Chartered Accountant (Form A). **(For Non-CPWD enlisted contractors).**

(iii) Should have a Banker's Certificate from a commercial Bank for **Rs. 13,17,93,996/-**. (Form B).

Or

Net Worth certificate from CA with Unique Document Identification Number (UDIN) of minimum 10% amount of ECPT (scanned copy of original to be uploaded) (Form B-1). **(For Non-CPWD enlisted contractors).**

2. **Additional Performance Guarantee in case of abnormally low bids : A bid shall be treated as abnormally low if the quoted bid amount is lesser than 80% of the estimated cost put to tender (ECPT). In cases of abnormally low bids, the bidder shall be required to submit an Additional Performance Guarantee in addition to the standard Performance Guarantee (PG) as per the following structure:-**

Percentage ECPT	Below	Additional Performance Guarantee to be submitted
Quoted bid amount is lesser than 80% of the ECPT		The amount of Additional Performance Guarantee (APG) shall be equivalent to the difference between the 80% amount of ECPT and quoted amount. (e.g. if ECPT is A and quoted amount is 0.7A then the amount of APG shall be $0.8A - 0.7A$)

NOTE:- The APG shall be in the form of Bank Guarantee or other acceptable form as per existing CPWD guidelines and must be submitted within the time frame prescribed for Performance Guarantee. Additional Performance Guarantee shall be submitted in favour of **Executive Engineer, PWD M-111, R.R. Lines, Dhaula Kuan, New Delhi-110010** (as per Circular no. **F.dspwd-2/E-343137/1895-1901 dated 20.05.2026 issued by the Deputy Secretary (PWD), PWD Secretariat**)

3. Bidding Capacity (applicable for CPWD enlisted contractors also): The bidding capacity of the contractor should be equal to or more than the estimated cost of the work put to tender.

bidding capacity shall be worked out by the following formula:

Bidding Capacity = $\{[AxNx1.5]-B\}$

Where,

A = Maximum turnover in construction works executed in any one year during the last seven years taking into account the completed as well as works in progress. The value of completed works shall be brought to current costing level by enhancing at a simple rate of 7% per annum.

N = Number of years prescribed for completion of work for which bids have been invited. If Number of years prescribed for completion of work is less than one year, it should be taken as N=1.

B = The Value of existing commitments and ongoing works to be completed during the period of completion of work for which bids have been invited.

Note: The bidder should submit bidding capacity as per Form 'C-3'.

4. The bid submitted shall be come invalid or financial bid shall not be opened if:-

(i) The bidders is found in eligible.

(ii) **The bidder does not deposit original EMD with division office of any Executive Engineer, PWD GNCTD (The EMD documents shall only be issued from the place in which the office of receiving division office is situated or the earnest money declaration).**

- (iii) The bidder does not upload all the documents (including GST Registration) as stipulated in the bid document **including the copy of receipt for deposition of original EMD.**
 - (iv) If any discrepancy is noticed between the documents as uploaded at the time of submission of bid and hard copies as submitted physically by the lowest bidder in the office of tender opening authority.
5. Agreement shall be drawn with the successful tenderer on prescribed Form No. CPWD 7 which is available as a Govt. of India Publication and also available on website www.cpwd.gov.in. Bidders shall quote his rates as per various terms and conditions of the said form which will form part of the agreement.
 6. The time allowed for carrying out the work will be **5 (Five Months)** from the date of start as defined in schedule 'F' or from the first date of handing over of the site, whichever is later, in accordance with the phasing, if any, indicated in the bid documents.
 7. The site for the work is available.
 8. The bid document consisting of plans, specifications, the schedule of quantities of various types of items to be executed and the set of terms & conditions of the contract to be complied with and other necessary documents except Standard General Conditions of Contract Form can be seen on website <https://govtprocurement.delhi.gov.in/> free of cost.
 9. After submission of the bid the contractor can re-submit revised bid any number of times but before last time and date of submission of bid as notified.
 10. While submitting the revised bid, contractor can revise the rate of one or more item (s) any number of times (he need not re-enter rate of all the items) but before last time and date of submission of bid as notified.
 11. When bids are invited in three stage system and if it is desired to submit revised financial bid then it shall be mandatory to submit revised financial bid. If not submitted then the bid submitted earlier shall become invalid.
 12. The First lowest bidder shall deposit the copies of all affidavits self attested along with supporting documents uploaded with tender should reach in the office of **Executive Engineer, PWD, WEST ROAD-1, R. R. Lines, Dhaula Kuan, Delhi 110010** within 7 days of the opening of tender failing which bid shall be rejected.

Copy of Enlistment order and certificate of work experience and other documents as specified in the press notice shall be scanned and uploaded to the E-tendering website within the period of bid submission. However, certified copy of all the scanned and uploaded documents as specified in press notice shall have to be submitted by the lowest bidder only within a week physically in the office of tender opening authority.

The bid submitted shall be opened at 03:30 PM on **15.06.2026**

13. Earnest Money in the form of Insurance Surety Bonds, Account Payee Demand Draft, Fixed Deposit Receipt, Bankers Cheque or Bank Guarantee (for balance amount as prescribed) from any of the Commercial Bank (drawn in favour of **Executive Engineer, PWD M-111, R.R. Lines, Dhaula Kuan, New Delhi-110010**) shall be scanned and uploaded on the e-Tendering website within the period of bid submission. The Original EMD should be deposited either in the office of Executive Engineer inviting bids or division office of any Executive Engineer, PWD (GNCTD) within the period of bid submission. The EMD receiving Executive Engineer (including NIT issuing EE) shall issue a receipt of deposition of earnest money deposit to the bidder in a prescribed format (enclosed) uploaded by tender inviting EE in the NIT.

The receipt shall also be uploaded to the e-tendering website by the intending bidder up to the specified bid submission date and time.

A part of earnest money is acceptable in the form of bank guarantee also. In such case, minimum

50% of earnest money or Rs. 20 lakhs, whichever is less, shall have to be deposited in shape prescribed above, and balance may be deposited in shape of Bank Guarantee of any Commercial bank having validity for a period of 90 days for single bid works and 180 days for two bid system or more from the last date of receipt of bids which is to be scanned and uploaded by the intending bidders

The earnest money given by all the tenderers except the lowest tenderer shall be refunded immediately after the expiry of stipulated bid validity period or immediately after acceptance of the successful bidder, whichever is earlier. However, in case of two/ three bid system, earnest money deposit of bidders unsuccessful during technical bid evaluation etc. should be returned within 30 days of declaration of result of technical bid evaluation.

14. Copy of Enlistment Order and certificate of work experience and other documents as specified in the notice inviting e- tender shall be scanned and uploaded on the e-Tendering website within the period of bid submission. However, certified copy of all the scanned and uploaded documents as specified in e- tender notice shall have to be submitted by the lowest bidder within a week physically in the office of tender opening authority.

Online bid documents submitted by intending bidders shall be opened only of those bidders, whose original EMD deposited with any division of PWD and other documents scanned and uploaded are found in order.

The bid submitted shall be opened at 03.30 PM on **15.06.2026**

15. The bid submitted shall become invalid refunded if:
 - (i) The bidder is found ineligible.
 - (ii) The bidder does not upload scanned copies of all the documents stipulated in the bid document.
 - (iii) If any discrepancy is noticed between the documents as uploaded at the time of submission of bid and hard copies as submitted physically by the lowest bidder in the office of bid opening authority.
 - (iv) If a tenderer quotes nil rates against each item in item rate tender or does not quote any percentage above/below on the total amount of the tender or any section / sub head in percentage rate tender, the tender shall be treated as invalid and will not be considered as lowest tenderer.
16. The bidder shall submit irrevocable performance guarantee of 5% (Five percent) and **Additional Performance Guarantee** (In Case of Abnormally Low Bids) Amount Equivalent to the difference between the **80% amount of ECPT** and Quoted Amount, in addition to **Performance Guarantee of 5% of the ECPT or contract amount whichever is higher**, in addition to other deposits mentioned else wherein the contract for his proper performance of the contract within the period specified in Schedule F. This guarantee shall be in the form of Insurance Surety Bonds, Account Payee Demand Draft, Fixed Deposit Receipt or Bank Guarantee from any of the Commercial Banks in accordance with the prescribed form. In case the contractor fails to deposit the said performance guarantee within the period as indicated in Schedule 'F', including the extended period if any, the Earnest Money deposited by the contractor shall be forfeited automatically without any notice to the contractor. The earnest money deposited along with bid shall be returned after receiving the aforesaid performance guarantee. The contractor whose bid is accepted will also be required to furnish either copy of applicable licenses/ registrations or proof of applying for obtaining labour licenses, registration with EPFO, ESIC and BOCW Welfare Board including Provident Fund Code No. If applicable and also ensure the compliance of aforesaid provisions by the subcontractors, if any engaged by the contractor for the said work within the period specified in Schedule-F.

17. **The description of the work is as follows :**

"Name of Work:- Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)".

Intending Bidders are advised to inspect and examine the site and its surroundings and satisfy themselves before submitting their tenders as to the nature of the ground and sub-soil (so far as is practicable), the form and nature of the site, the means of access to the site, the accommodation they may require and in general shall themselves obtain all necessary information as to risks, contingencies and other circumstances which may influence or affect their tender. A tenderer shall be deemed to have full knowledge of the site whether he inspects it or not and no extra charge consequent on any misunderstanding or otherwise shall be allowed. The tenderer shall be responsible for arranging and maintaining at his own cost all materials, tools & plants, water, electricity access, facilities for workers and all other services required for executing the work unless otherwise specifically provided for in the contract documents. Submission of a tender by a tenderer implies that he has read this notice and all other contract documents and has made himself aware of the scope and specifications of the work to be done and of conditions and rates at which stores, tools and plant, etc. will be issued to him by the Government and local conditions and other factors having a bearing on the execution of the work.

18. The competent authority on behalf of the President of India does not bind itself to accept the lowest or any other tender and reserves to itself the authority to reject any or all the tenders received without the assignment of any reason. All tenders in which any of the prescribed condition is not fulfilled or any condition including that of conditional rebate is put forth by the tenderer shall be summarily rejected.
19. Canvassing whether directly or indirectly, in connection with tenderers is strictly prohibited and the tenders submitted by the contractors who resort to canvassing will be liable to rejection.
20. The competent authority on behalf of President of India reserves to himself the right of accepting the whole or any part of the tender and the tenderer shall be bound to perform the same at the rate quoted.
21. The contractor **(enlisted or non- enlisted in CPWD)** shall not be **allowed to participate** in the tender for work (s) in the PWD (GNCTD) Zone / circle / Division / Sub – Division responsible for award and / or execution of contract (S) in which his near relative is posted as Divisional Accountant or as an officer in any capacity between the grades of the **Chief Engineer** and Junior Engineer (both inclusive). He shall also intimate the names of persons who are working or are subsequently employed by him and who are near relatives to any officer **working** in the **CPWD/PWD (GNCTD)**. Any breach of this condition by the contractor would render him liable to be **debarred for a period upto two years from tendering in CPWD/PWD (GNCTD) as decided by the accepting authority mentioned in Schedule F.**
22. No Engineer of gazette rank or other Gazetted Officer employed in Engineering or Administrative duties in an Engineering Department of the Government of India is allowed to work as a contractor for a period of one year after his retirement from Government service, without the previous permission of the Government of India in writing. This contract is liable to be cancelled if either the contractor or any of his employees is found any time to be such a person who had not obtained the permission of the Government of India as aforesaid before submission of the tender or engagement in the contractor's service.
23. During the currency of Work, In case main contractor fails to make the payment to contractor associated by him for specified component(s) within 15 days of receipt of each running account payment then on the written complain of the contractor associated for such specified component(s),

the Executive Engineer in charge of concerned component shall serve show cause notice to main contractor and after considering the reply of the same he may make payment directly to the contractor associated for specified component(s) as per terms and conditions of the agreement drawn between main contractor and the associated contractor for the specified component(s).

24. **The bid for the works shall remain open for acceptance for a period of 75 (Seventy Five) days from the date of opening of technical bid.**
- (i) If any tenderer withdraws his tender or makes any modification in the terms and conditions of the tender which is not acceptable to the Department within 7 days after last date of submission of bids, then the Government shall without prejudice to any other right or remedy, be at liberty to forfeit 50% of the earnest money absolutely irrespective of letter of acceptance for the work is issued or not.
 - (ii) If any tenderer withdraws his tender or makes any modification in the terms and conditions of the tender which is not acceptable to the Department after expiry of 7 days after last date of submission of bids, then the Government shall without prejudice to any other right or remedy, be at liberty to forfeit 100% of the earnest money absolutely irrespective of letter of acceptance for the work is issued or not.
 - (iii) In case of forfeiture of earnest money as prescribed in para (i) and (ii) above, the bidders shall not be allowed to participate in the rebidding process of the same work.
25. This Notice Inviting of Tender shall form a part of the contract document. The successful tenderer / contractor, on acceptance of his tender by the accepting authority, shall, within 15 days from the stipulated date of start of the work sign the contract consisting of:-
- (a) The Notice Inviting Bid, all the documents including additional conditions, specifications and drawings, if any, forming the bid as uploaded at the time of invitation of bid and the rates quoted online at the time of submission of bid and acceptance thereof together with any correspondence leading thereto.
 - (b) Standard C.P.W.D. Form 7 i.e. **General Conditions of Contract 2023, Construction Work of CPWD** with amendments up to the date of receipt of tender.
26. **The agency shall quote the percentage rate inclusive of all applicable taxes such as GST, Income Tax, Labour Welfare Cess, etc. as imposed by Government from time to time. Nothing will be reimbursed except for ESI and EPF subscription deposited by agency on production of payment receipts.**
27. **If any action will be initiated under Clause-2/Clause-3/Clause-5 (any one or in all mentioned Clauses), the Performance Guarantee & Additional Performance Guarantee (Both) will be forfeited & no Claim in this regard will be entertained/considered.**

**Executive Engineer
Division West Road -1, PWD,
R. R. Lines, Dhaula Kuan,
Delhi 110010**

**GOVERNMENT OF INDIA
CENTRAL PUBLIC WORKS DEPARTMENT**

STATE : **GNCTD**
BRANCH : **B & R**

ZONE : **NORTH**

CIRCLE : **WEST (M)**
DIVISION : **WEST ROAD-1**

Percentage Rate Tender & Contract for Works

Tender for the work: Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)

- (i) To be submitted/uploaded at by 3.00PM on **15.06.2026** at <https://govtprocurement.delhi.gov.in>.
- (ii) To be opened in the presence of tenderers who may be present at **3.30 PM onward 15.06.2026** in the office of Executive Engineer, PWD, Division West Roads-1 , R. R. Lines, Dhaula Kuan, Delhi 110010.

TENDER

I/We have read and examined the notice inviting tender, schedule, A, B,C,D,E & F. specifications applicable , Drawings & Designs, General Rules and Directions, Conditions of Contract, clauses of contract, special conditions, Schedule of Rate & other documents and Rules referred to in the condition of contract and all other contents in the tender document for the work.

I/We hereby tender for the execution of the work specified for the President of India within the time specified in Schedule "F", viz., schedule of quantities and in accordance in all respects with the specifications, design, drawings and instructions in writing referred to in Rule-I of General Rules and Directions and in Clause-11 of the Conditions of contract and with such materials as are provided for, by, and in respects in accordance with, such condition so far as applicable.

We agree to keep the tender open for **(75) Seventy Five days** from the due date of its opening and not to make any modification in its terms and conditions.

I / We have deposited EMD for the prescribed amount in the office of concerned Executive Engineer as per the bid document.

A copy of earnest money deposit receipt of prescribed amount deposited in the form of Insurance Surety Bonds, Account Payee Demand Draft, Fixed Deposit Receipt, Bankers Cheque or Bank Guarantee (as prescribed) issued by a Commercial Bank, is scanned and uploaded (strike out as the case may be). If I/We fail to furnish the prescribed performance guarantee within prescribed period, I/We agree that the said President of India or his successors representatives, in office shall without prejudice to any other right or remedy, be at liberty to forfeit the said earnest money absolutely. Further, if I/We fail to commence work as specified, I/We agree that President of India or the successors representatives in office shall without prejudice to any other right or remedy available in law, be at liberty to forfeit the said the performance guarantee absolutely. The said performance Guarantee shall be a guarantee to execute all the works referred to in the tender documents upon the terms and conditions contained or referred to those in excess of that limit at the rates to be determined

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

in accordance with the provision contained in **Clause 12.2 and 12.3** of the tender form.

Further I/We agree that in case of forfeit of Earnest Money / Performance Guarantee as aforesaid, I/We shall be debarred for participation in the re-tendering process of the work.

I/we undertake and confirm that eligible similar works has/have not been got executed through another contractor on back to back basis. Further that, if such a violation comes to the notice of Department, then I/we shall be debarred for bidding in CPWD/PWD in further forever. Also, if such a violation comes to the notice of Department before date of start of work, the Engineer-in-Charge shall be free to forfeit the entire amount of Earnest Money Deposit/Performance Guarantee.

I/We hereby declare that I/We shall treat the tender documents drawings and other records connected with the work as secret/confidential documents and shall not communicate information/derived there from to any person other than a person to whom I/We am/are authorized to communicate the same or use the information in any manner prejudicial to the safety of the State.

Dated _____ ** _____

Signature of Contractor

Postal Address _____ ** _____

Witness: *** _____

_____ ** _____

Address: *** _____ Mobile WhatsApp No./Telegram No _____

Occupation: *** _____

Telephone No. _____

Fax _____

E-Mail _____


(**) Mandatory to be filled in by the Contractor

(***) To be filled in by the Witness.

ACCEPTANCE

The above tender (as modified by you as provided in the letters mentioned hereunder) is accepted by me for and on behalf of the President of India for a sum of Rs. _____*_____ (Rupees _____*_____).

The letter referred to below shall form part of this agreement: -

- a)  _____*
- b) _____*
- c) _____*

For & on behalf of the President of India

Signature.....*

Executive Engineer
Division West Road -1, PWD,
R. R. Lines, Dhaula Kuan, Delhi 110010

Dated*

(*) To be filled by EE/PWD

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

Receipt of deposition of original EMD

Receipt No.		date:-
1.	Name of work:-	Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)
2.	NIT No. :-	16/CE/North/PWD/2026-27
3.	Estimated Cost:-	Rs. 32,94,84,990
4.	Amount of Earnest Money Deposit:-	Rs. 44,94,850/-
5.	Last date and time of submission of bid:-	15.06.2026 up to 3:00 PM
6.	Name of Contractor:-	
7.	Form of EMD:-	
8.	Amount of earnest Money Deposit:-	
9.	Date of submission of EMD:-	

**Signature, Name and Designation of EMD receiving officer along with Office stamp
(# To be filled by EMD receiving EE/DDH/AE(P)/AAO**

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

(Scanned copy to be uploaded at the time of submission of bid)

FORM-A
FINANCIAL INFORMATION

1. Financial Analysis - Details to be furnished duly supported by figures in balance sheet/profit & loss account for the last five years duly certified by the Chartered Accountant, as submitted by the applicant to the Income Tax Department.

Sl. No.	Description	Financial Years				
		2020-21	2021-22	2022-23	2023-24	2024-25
(i)	Gross Annual turnover on construction works					
(ii)	Profit / Loss					
a)	Stand alone financial statement					
b)	Consolidated financial statement					

2. Financial arrangements for carrying out the proposed work.

Loss to be shown in with (-) sign

Signature of Chartered Accountant with Seal

SIGNATURE OF BIDDER(S)

(Scanned copy to be uploaded at the time of submission of bid)

FORM "B"

BANKER'S CERTIFICATE FROM A COMMERCIAL BANK

This is to certify that to the best of our knowledge and information, M/s./Sh having margin ally noted address,.....as a Customer of our bank are /is respectable and can be treated as good for any engagement upto a limit of Rs (Rupees)

This certificate is issued without any guarantee or responsibility on the bank or any of the officers.

(Signature) For the Bank

NOTE

1. Banker's certificates should be on the letterhead of the Bank, addressed to the tendering authority.
2. In the case of a partnership firm, certificates should include the names of all partners as recorded with the Bank.

Or

(Scanned copy to be uploaded at the time of submission of bid)

FORM "B-1"

FORM FOR CERTIFICATE OF NET WORTH FROM CHARTERED ACCOUNTANT

It is to certify that as per the audited balance sheet and profit & loss account during the financial year.....,the Net Worth of M/s.....(Name & Registered Address of individual/ firm/ company), as on.....(the relevant date) is Rs.....after considering all liabilities. It is further certified that then Net Worth of the company has not eroded by more than 30% in the last three years ending on (the relevant date).

"Unique Document Identification Number (UDIN).....

Signature of Chartered Accountant.....

Name of Chartered Accountant.....

Membership No. of ICAI

Date and Seal

Form 'C'**DETAILS OF ALL WORKS OF SIMILAR CLASS COMPLETED DURING THE LAST SEVEN YEARS
ENDING PREVIOUS DAY OF LAST DATE OF SUBMISSION OF TENDER**

S. No.	Name of work / project & location	Owner or sponsoring organisation	Cost of work in crores (in Rs.)	Date of commencement as per contract	Stipulated date of completion	Actual date of completion	Extension of time granted with levy of compensation or without levy of compensation	Litigation/ arbitration pending/ in progress with details #	Name & address/ telephone number of officer to whom reference may be made for verification	Remarks indicating the type of structure (RCC framed or load bearing) constructed.
1	2	3	4	5	6	7	8	9	10	11

Indicate gross amount claimed and amount awarded by the Arbitrator

SIGNATURE OF BIDDER(S)

CORRECTION-----NIL-----
 DELETION----- --NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

FORM 'C'-1 (Applicable for CPWD/ Non-CPWD Contractors only)**PROJECTS UNDER EXECUTION**

S. No.	Name of work/ Project and location	Owner or sponsoring organization	Cost of work in crores of rupees	Date of commencement as per contract	Stipulated date of completion	Upto date percentage progress of work	Slow progress if any and reasons thereof	Name and address/telephone number of officer to whom reference may be made	Remarks
1	2	3	4	5	6	7	8	9	10

Signature of Bidder(s)

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

FORM 'C'-2 (Applicable for CPWD/ Non-CPWD Contractors only)
Calculation of bidding capacity
Details of existing commitments and ongoing works

Information required to evaluate the Bidding Capacity under clause Bid Capacity:

To calculate the value of "A" and "B"

A table containing value of Construction works undertaken by the Bidder during the last 7 years is as follows:

Sl. No.	FY	Value of construction Works undertaken (in Rs. Crore)	Updation Factor	Gross value after considering updation factor (Rs. in Crore)
(1)	(2)	(3)	(4)	(5) = (3) X (4)
1	2024-25			
2	2023-24			
3	2022-23			
4	2021-22			
5	2020-21			
6	2019-20			
7	2018-19			

FORM 'C'-3 (Applicable for CPWD/ Non-CPWD Contractors only)

Sr. No. No.	Name of work/ Project and location	Owner or sponsoring organization	Contract value in crore of rupees	Date of commencement as per contract	Stipulated date of completion	Upto date percentage progress of work	Remaining work in percentage (100-column 7)	Existing commitment Column 4 x Column 8/100	Name and address/ telephone number of office to whom reference may be	Remarks
1	2	3	4	5	6	7	8	9	10	11

Total (B) =
Maximum turnover in last seven year = Rs.....
Updated value of turnover (A) = Rs.....
No. of years (N) = ...
Bidding Capacity={[AxNx1.5]-B} =
Certificate:
I certify that all the awarded and ongoing works have been included in the above list
(Signature of Bidder(s))

Maximum gross value of projects after considering updation factor that have been undertaken during the F.Y. _____ out of the last 7 years is Rs. _____ Crore (Rupees _____). (This will be considered as value of A while evaluating the bidding capacity).

It is to certify that above is the total list of work under progress and information furnished is true and nothing has been hide out. Further that, if such a violation comes for hiding or incorrect information comes to the notice of Department, then I/we shall be debarred for bidding in CPWD future forever.

The statement showing the value of all existing commitments, anticipated value of work to be completed in the period of construction of the project for which bid is invited and ongoing works as well as the stipulated period of completion remaining for each of the works mentioned above is verified from the certificate issued that has been countersigned by the Client or its Engineer-in- Charge not below the rank of Executive Engineer or equivalent in respect all projects. No awarded / ongoing works has been left in the aforesaid statement which has been awarded to M/s.....individually / and other member M/s..... and M/s....., as on bid due date of this NIT.

(Scanned copy to be uploaded at the time of submission of bid)

FORM 'D'
PERFORMANCE REPORT OF WORKS

1.	Name of work/project & location	
2.	Agreement no.	
3.	Estimated cost	
4.	Tendered cost	
5.	Date of start	
6.	Date of completion	
i)	Stipulated date of completion	
ii)	Actual date of completion	
7.	Amount of compensation levied for delayed completion, if any	
a)	Whether case of levy of compensation for delay has been decided or not	Yes/No
b)	If decided, amount of compensation levied for delayed completion, if any	
8.	Amount of reduced rate items, if any	
9.	Performance Report	
(1)	Quality of work	Outstanding/Very Good/Good/Satisfactory/Poor
(2)	Financial soundness	Outstanding/Very Good/Good/Satisfactory/Poor
(3)	Technical Proficiency	Outstanding/Very Good/Good/Satisfactory/Poor
(4)	Resourcefulness	Outstanding/Very Good/Good/Satisfactory/Poor
(5)	General Behaviour	Outstanding/Very Good/Good/Satisfactory/Poor

Note : Performance report of Quality of work must be minimum “Good’ to consider the work for experience criteria.

Dated:**Executive Engineer or Equivalent**

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

On non-judicial stamp paper of minimum Rs. 100

(Guarantee offered by Bank to CPWD in connection with the execution of contracts)
**Form of Bank Guarantee for Earnest Money Deposit /Performance
 Guarantee/Security Deposit/Mobilization Advance**

1. Whereas the Executive Engineer (name of division), CPWD on behalf of the President of India (hereinafter called "The Government") has invited bids under (NIT number) dated for (name of work) The Government has further agreed to accept irrevocable Bank Guarantee for Rs. (Rupees only) valid upto (date)* as **Earnest Money Deposit** from (name and address of contractor) (hereinafter called "the contractor") for compliance of his obligations in accordance with the terms and conditions of the said NIT.

OR**

- Whereas the Executive Engineer (name of division), CPWD on behalf of the President of India (hereinafter called "The Government") has entered into an agreement bearing number with (name and address of the contractor) (hereinafter called "the Contractor") for execution of work (name of work) The Government has further agreed to accept an irrevocable Bank Guarantee for Rs. (Rupees only) valid upto (date) as **Performance Guarantee/Security Deposit/Mobilization Advance** from the said Contractor for compliance of his obligations in accordance with the terms and conditions of the agreement.
2. We, ... (indicate the name of the bank) (herein after referred to as "the Bank"), hereby undertake to pay to the Government an amount not exceeding Rs. (Rupees only) on demand by the Government within 10 days of the demand.
3. We, ... (indicate the name of the Bank), do hereby undertake to pay the amount due and payable under this guarantee without any demur, merely on a demand from the Government stating that the amount claimed is required to meet the recoveries due or likely to be due from the said Contractor. Any such demand made on the Bank shall be conclusive as regards the amount due and payable by the Bank under this Guarantee. However, our liability under this guarantee shall be restricted to an amount not exceeding Rs. (Rupees only)
4. We, ... (indicate the name of the Bank), further undertake to pay the Government any money so demanded notwithstanding any dispute or disputes raised by the contractor in any suit or proceeding pending before any Court or Tribunal, our liability under this Bank Guarantee being absolute and unequivocal. The payment so made by us under this Bank Guarantee shall be a valid discharge of our liability for payment there under and the Contractor shall have no claim against us for making such payment.
5. We, ... (indicate the name of the Bank), further agree that the Government shall have the fullest liberty without our consent and without affecting in any manner our obligation here under to vary any of the terms and conditions of the said agreement or to extend time of performance by the said Contractor from time to time or to postpone for any time or from time to time any of the powers exercisable by the Government against the said contractor and to forbear or enforce any of the terms and conditions relating to the said agreement and we shall not be relieved from our liability by reason of any such variation or extension being granted to the said Contractor or for any forbearance, act of omission on the part of the Government or any indulgence by the Government to the said Contractor or by any such matter or thing


 Y.P. Sahu
 JRO&M

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

whatsoever which under the law relating to sureties would, but for this provision, have effect of so relieving us.

6. We, ... (indicate the name of the Bank), further agree that the Government at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor at the first instance without proceeding against the Contractor and notwithstanding any security or other guarantee the Government may have in relation to the Contractor's liabilities.
7. This guarantee will not be discharged due to the change in the constitution of the Bank or the Contractor.
8. We, ... (indicate the name of the Bank), undertake not to revoke this guarantee except with the consent of the Government in writing.
9. This Bank Guarantee shall be valid up to unless extended on demand by the Government. Notwithstanding anything mentioned above, our liability against this guarantee is restricted to Rs. (Rupees only) and unless a claim in writing is lodged with us within the date of expiry or extended date of expiry of this guarantee, all our liabilities under this guarantee shall stand discharged.

Date

Witnesses:

1. Signature.....
Name and address

Authorized signatory

Name

Designation

Staff code no.

Bank seal

2. Signature
Name and address

*Date to be worked out on the basis of validity period of 90 days where only financial bids are invited and 180 days for two/three bid system from the date of submission of tender.

**In paragraph 1, strike out the portion not applicable. Bank Guarantee will be made either for earnest money or for performance guarantee/security deposit/mobilization advance, as the case may be.


V.P. Sahu 20.10.2020
SECM

AFFIDAVIT FOR INCREASE OF VALIDITY OF BANK GUARANTEE

I/We have submitted a bank guarantee for the work------(Name of work),

Agreement No....., dated....., From
(Name of bank with full address)

To the Executive Engineer.....(Name of division)

With a view to seek exemption from payment of security deposit /Performance guarantee /guarantee money for
 expansion joint /Electrometric bearing /bitumen mastic work in cash. This bank guarantee expires
 on.....

I/We undertake to keep the validity of the bank guarantee intact by getting it extended from time to time at
 my/our own initiative up to a period of months after the
 recorded date of completion of the work or as directed by the Engineer-in-charge.

I/We also indemnify the government against any losses arising out of..... non-encashment of the bank
 guarantee, if any.

Deponent Signature of contractor

The affidavit is to be given by the executants before a First-Class Magistrate.

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

**(Scanned copy to be uploaded at the time of submission of bid)
Form-F**

Undertaking on ₹100 Non-Judicial Stamp Paper

Name of Work:- Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)

NIT No:

I/We undertake and confirm that I am not debarred/blacklisted as on the date of bidding from any unit of PWD Delhi/CPWD to participate in the tendering. Further, if such a violation comes to the notice of the Department, then I/we shall be debarred from bidding in PWD Delhi/CPWD in the future forever. Also, if such a violation comes to the notice of the Department later, the Engineer-in-Charge shall be free to forfeit the entire amount of Earnest Money Deposit/Performance Guarantee.

It is also undertaken that if I/we am/are debarred from CPWD/PWD Delhi till the last date of receipt of the tender after bidding (if the bid is submitted before the last date of receipt of the tender), my tender shall be rejected.

Date:

Signature of Agency

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

(Scanned copy to be uploaded at the time of submission of bid)

Form-G
Undertaking on ₹100 Non-Judicial Stamp Paper

Name of Work:- Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)

NIT No:

I/We undertake and confirm that eligible similar work(s) has/have not been executed through another contractor on a back-to-back basis. Further, if such a violation comes to the notice of the Department, then I/we shall be debarred from bidding in PWD Delhi/CPWD in the future forever. Also, if such a violation comes to the notice of the Department before the date of the start of work, the Engineer-in-Charge shall be free to forfeit the entire amount of Earnest Money Deposit/Performance Guarantee.

Date:

Signature of Agency

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

(Scanned copy to be uploaded at the time of submission of bid)

AFFIDAVIT OF NON-COMPLIANCE AND BLACKLISTING

Form-H

I, do hereby solemnly affirm and state as follows:

1. That I am the [Designation] of [Your Company Name], and I am duly authorized to file this affidavit on behalf of the company.
2. That the Agency [Agency Name], located at [Agency Address], going to participate in (NIT no.....) [Project Name/Contract Number] under the supervision of the Engineer-in-Charge, [Engineer-in-Charge Name and address].
3. That the Agency [Agency Name] has failed to comply with the instructions issued by the Engineer-in-Charge, as per the agreement and scope of work. The details of non-compliance are as follows:
 - Failure to meet project deadlines
 - Poor quality of work
 - Delay in submission of reports
 - Failure to follow specifications outlined in the contract
 - Non-communication with the Engineer-in-Charge
4. Not compliance of any point mentioned in point no 3, Engineer-in-Charge's having full rights to process for blacklisting agency from PWD.

I, therefore, affirm that this affidavit is true and correct to the best of my knowledge and belief.

Dated: [Insert Date]

Place: [Insert Place]

Signature: _____

Name: [Your Full Name]

Designation: [Your Designation]

Company Name: [Your Company Name]

(Scanned copy to be uploaded at the time of submission of bid)

AFFIDAVIT FOR ANY MISHAPPENED

Form-I

I, do hereby solemnly affirm and state as follows:

1. That I am the [Designation] of [Your Company Name], and I am duly authorized to file this affidavit on behalf of the company.
2. That the Agency [Agency Name], located at [Agency Address], going to participate in (NIT no.....) [Project Name/Contract Number] under the supervision of the Engineer-in-Charge, [Engineer-in-Charge Name and address].
3. That the Agency [Agency Name] has fully responsible for following :
 Agency will be responsible for any injury, partial or permanent, or death at the site due to accidents, malfunctioning of the equipment, or negligence of the staff.
 Agency will be responsible in case of accident due to flooding/water logging or fall in drain and negligence of safety measures.
4. Not compliance of any point mentioned in point no 3, Engineer-in-Charge's having full rights to process for blacklisting agency from PWD.

I, therefore, affirm that this affidavit is true and correct to the best of my knowledge and belief.

Dated: [Insert Date]

Place: [Insert Place]

Signature: _____

Name: [Your Full Name]

Designation: [Your Designation]

Company Name: [Your Company Name]

Form-J**INFORMATION REGARDING ELIGIBILITY LETTER OF TRANSMITTAL**

[On the letterhead paper of the bidder, or partner responsible including full postal address, telephone no., fax no. and E-Mail and communicable address]

To,

Executive Engineer
Division West Road -1, PWD,
R. R. Lines, Dhaula Kuan,
Delhi 110010

Name of Work: **Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)**

Sir,

Having examined the details given in the bid document for the above work, I / We hereby submit the relevant information.

1. I / We hereby certify that all the statements made and information supplied in the enclosed forms **A** to **F** and accompanying statement are true and correct.
2. I / We have furnished all information and details necessary for eligibility and have no further pertinent information to supply.
3. I / We also **Executive Engineer, PWD, Division West Roads - 1, R. R. Lines, Dhaula Kuan, Delhi 110010** to approach individuals, employers, firms and corporation to verify our competence and general reputation.
4. I / We submit the following certificates in support of our suitability, technical knowledge and capability for having successfully completed the following eligible similar works :

Sr. No.	Name of Work	Certificate From

Certificate: It is certified that the information given in the enclosed eligibility bid are correct. It is also certified that I/we shall be liable to be debarred, disqualified/ cancellation of enlistment in case any information furnished by me/us found to be incorrect.

Enclosures:

Seal of bidder

Date of submission

SIGNATURE(S) OF BIDDER(S)

UNDERTAKING FOR SITE INSPECTION

To,

**Executive Engineer
Division West Road -1, PWD,
R. R. Lines, Dhaula Kuan,
Delhi 110010**

Name of Work: Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)

NIT No:

I/we have inspected and examined the site and its surroundings ; and is / are satisfied before submitting our bid as to the form and nature of the site, the means of access to the site, the accommodation I/we may require and in general shall myself / ourselves obtain all necessary information as to risks, contingencies and other circumstances which may influence or affect our bid. I/we shall be deemed to have full knowledge of the site whether I/we inspect it or not and no extra charge consequent on any misunderstanding or otherwise shall be allowed. I/we shall be responsible for arranging and maintaining at our own cost all materials, tools & plants, water, electricity access, facilities for workers and all other services required for executing the work unless otherwise specifically provided for in the contract documents.

Submission of a bid by me/ us implies(s) that I/we have read this notice and all other contract documents and has made myself / ourself aware of the scope and specifications of the work to be done and of conditions and rates at which stores, tools and plant, etc. will be issued to us by the Government and local conditions and other factors having a bearing on the execution of the work. Place :

Date :

Yours faithfully

(Signatures of Bidder(s))

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

PROFORMA OF SCHEDULES
SCHEDULES

Schedule 'A'

Schedule of Quantities	Page No 122 to 128
------------------------	---------------------------

SCHEDULE 'D'	
Extra schedule for specific requirements/documents for the work, if any.	As attached in tender form

SCHEDULE 'E'	
Reference to General conditions of contract: -	CPWD form-7, GCC-2023 for Construction works as amended/ modified and corrected by DG, CPWD up to previous day of last date of submission of tender including extension, if any and as further amended by PWD secretariat, GNCTD office Memorandum issued vide No. Pr. CE (M&F)/E in C(PWD)/7111/dspwd2/53-56 dt 10/01/2024 and further modified and corrected by PWD secretariat, GNCTD, up to previous day of last date of submission of tender including extension, if any.

Name of Work:	Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)	
i)	Estimate cost of work	Rs. 32,94,84,990/-
ii)	Earnest Money	Rs. 44,94,850/- (to be returned after receiving performance guarantee)
iii)	Performance Guarantee	5% of the Estimated cost put to tender (ECPT) or Contract Amount whichever is higher + APG
iv)	Security Deposit	2.5% of the tendered value of the work
v)	Additional Performance Guarantee in case of abnormally low bids	Amount equivalent to the difference between the 80% amount of ECPT and quoted amount (as per Circular no. F.dspwd-2/ E-343137/1895-1901 dated 20.05.2026 issued by the Deputy Secretary PWD, PWD Secretariat.

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

SCHEDULE 'F'**GENERAL RULES AND DIRECTIONS:**

Officer Inviting Tender	Executive Engineer, Division West Roads -1 (M-111), PWD, (GNCTD), Delhi-110010
-------------------------	---

Definitions:

2 (v)	Engineer-in-Charge	Executive Engineer, PWD, Division West Road- 1 (M-111), Delhi or successor thereof
2(viii)	Accepting Authority	Chief Engineer (North Maintenance Zone), PWD or successor thereof
2(x)	Percentage on cost of materials and labour to cover all overheads and profits.	15% Over Head charges and Contractor Profit on analysis of rates as per CPWD Delhi Analysis of Rates (DAR)
2(xi)	Standard Schedule of Rates	DSR-2023/Market rates
2(xii)	Department	PWD (GNCTD)
9(ii)	Standard CPWD contract Form	Form 7 of General Conditions of Contract Construction Works-2023 CPWD (modified and corrected up to previous day of last date of submission of tender including extension, if any)

Clause 1

i)	Time allowed for submission of Performance Guarantee as well as Additional Performance Guarantee, Programme Chart (Time and Progress) and applicable Labour licenses, registration with EPFO, ESIC and BOCW Welfare Board or proof of applying thereof from the date of issue of letter of acceptance	7 days
ii)	Maximum allowable extension with late fee @ 0.1% per day of Performance Guarantee amount beyond the period provided in (i) above	3 Days

Clause 2

Authority for fixing compensation under clause 2.	Superintending Engineer West Maintenance Circle, PWD or successor thereof
---	--

Clause 2A

Whether Clause 2A shall be applicable	Not Applicable
---------------------------------------	-----------------------

Clause 5

Number of days from the date of issue of letter of acceptance for reckoning date of start Mile stone(s) as per table given below	10 Days
--	----------------

MILE STONE**MILE STONE(s) OF THE CONTRACT**

Sl. No.	Description of Milestone (Financial/ physical progress) (% or in Rs)	Time Allowed in days (from date of start)	Amount to be withheld in case of non-achievement of mile stone
1	1/8 th of whole work	1/4 th of stipulated period	1.25% of tendered value.
2	3/8 th of whole work	½ of stipulated period	1.25% of tendered value.
3	¾ th of whole work	¾ th of stipulated period	1.25% of tendered value.
4	Complete work	Full stipulated period	1.25% of tendered value.
Time allowed for execution of work		5 (Five Months)	

Schedule of handing over of sites

Part	Portion of site	Description	Time period for handing over reckoned from date of issue of letter of intent.
Part-A	Portion without any hindrance	Site is available	-----
Part-B	Portions with encumbrances	----	----
Part-C	Portions dependent on work of other agencies	----	----

Authority to convey the decision of shifting of milestone and extension of time.	Executive Engineer, PWD, Division West Road- 1 (M-111), Delhi or successor thereof
Authority to decide rescheduling of mile stones and extension of time.	Superintending Engineer, West Maint. Circle, (PWD) New Delhi or successor thereof
Shifting of date of start in case of delay in handing over of site	Superintending Engineer, West Maint. Circle, (PWD) New Delhi or successor thereof

Clause 5A

Whether Clause 5A shall be applicable	Not Applicable
---------------------------------------	-----------------------

Clause 6

Computerized Measurement Book (CMB)/ Electronic Measurement Book (EMB) Mode of Measurement	CMB
--	------------

Clause 7

Gross work to be done together with net payment/adjustment of advances for material collected, if any, since the last such payment for being eligible to interim payment.	Rs. 6.00 crore
---	-----------------------

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

Clause 7A

Whether Clause 7A shall be applicable	Applicable No Running Account Bill shall be paid for the work till the applicable labour licenses, registration with EPFO and ESIC, whatever applicable are submitted by the contractor to the Engineer-in-charge.
---------------------------------------	--

Clause 8A

Authority to decide compensation on account if contractor fails to submit completion plans	Executive Engineer, PWD, Division West Road- 1 (M-111), Delhi
--	--

Clause 10A

List of testing equipment to be provided by the contractor at site lab.	As per requirement of work and direction of Engineer-in- Charge
---	--

Clause 10B

Whether Clause 10 B shall be applicable	Not applicable
---	-----------------------

Clause 10 C	Applicable
Component of labour expressed as percent of value of work	15 %
Clause 10 CC	Not Applicable

Clause 11

Specifications to be followed for execution of work	(i) CPWD Specifications 2019 vol. I & II with upto date correction slips, general conditions, additional and particular specifications attached in tender documents (ii) MORTH specification for Road & Bridge work (Fifth revision 2013).
---	---

Clause 12

12.2 & 12.3 :- Deviation/Variations Extent and Pricing, as applicable to PWD	Original work The completion cost shall, in no case, exceed 1.25 times the contract amount vide Dy. Secretary, PWD office letter No. F.dspwd-2/773-778 dt: 25.06.2024, For operation of clause 12.2 and 12.3 rate shall be derived on DSR rate plus/minus percentage above / below quoted contract amount.
---	--

Clause 16

Competent Authority for deciding reduced rates.	1. Superintending Engineer, West Maint. Circle, PWD (GNCTD) (upto 5% of contract value).
	2. with the Approval of ADG/SDG (Beyond 5% of contract value)

Clause-18

List of machinery, tools & plants to be deployed by the contractor at site	As per site requirement
--	--------------------------------

Clause 19	The contractor shall obtain a valid license under the Contract Labour (R&A) Act, 1970 and the Contract Labour (Regulation and Abolition) Central Rules, 1971 before the commencement of the work and continue to have a valid license until the completion of the work. The contractor shall be also comply with provisions of the Inter-State Migrant Workmen (Regulation of Employment and Conditions of Service) Act, 1979.	
Clause 19C	Authority to decide for each default	Engineer-in-Charge
Clause 19D	Authority to decide for each default	Engineer-in-Charge
Clause 19G	Authority to decide for each default	Engineer-in-Charge
Clause 19K	Compensation for not deploying qualified tradesmen	Rs. 1000/- per trade man per day
Authority to decide penalty for each default		Executive Engineer (C)

Clause-25	Deleted (Any dispute arising between the parties to this agreement/contract shall be subject to the exclusive jurisdiction of Courts in Delhi only)
------------------	---

Clause 32

Sr. No.	Type of Manpower	Qualification	No.	Minimum Experience (Years)	Rate at which recovery shall be made from the contractor in the event of not fulfilling provision of clause 32 (i)
					Figures
1	Project Manager	Graduate Engineer	1	20 years	Rs. 60,000/-
2	Deputy Project Manager	Graduate Engineer	2	12 Years	Rs. 40,000/- per month per person
3	Project/Site Engineer	Graduate / Diploma Holder	2	5 /10 years	Rs. 25,000/- per month per person
4	Quality Engineer	Graduate Engineer	2	8 years	Rs. 25,000/- per month per person
5	Surveyor	Diploma Engineer	1	8 years	Rs. 15,000/- per month per person
6	Project Planning/Billing	Graduate Engineer	2	6 years	Rs. 20,000/- per month per person

Assistant Engineer (Civil) retired from Government service that are holding Diploma will be treated at par with Graduate Engineers.

Diploma holder with minimum 10 years relevant experience with a reputed construction co. can be treated at par with Graduate Engineers for the purpose of such deployment subject to the condition that such diploma holders should not exceed 50% of the requirement of degree engineers.

Clause 38

	Schedule/ statement for determining theoretical quantity of cement & bitumen on the basis of Delhi Schedule of Rates 2023 printed by CPWD	D.S.R. 2023 for Civil Work with correction slips up to last date of submission of tender including extension, if any
	Variations permissible on theoretical quantities	
	Cement	
	For works with estimated cost put to tender not more than 25 lakhs.	3% plus/minus
	For works with estimated cost put to Tender is more than 25 lakhs.	2% plus/minus
	Bitumen all works	2.5% plus only & nil on minus side
	Steel reinforcement and structural steel Sections for diameter, section and category.	2% plus/minus.
	All other materials	Nil

Executive Engineer
Division West Road- 1 (M-111)
R. R. Lines, Dhaula Kuan,

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

INTEGRITY PACT	PWD
----------------	-----

To,
All the bidders

**Subject: NIT No. for the work
“Remodeling of storm water drain as per New Master Drainage Plan 2025 of
(1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain
to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya
Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg
(Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg
(Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub
Division WR-12, New Delhi.).”**

Dear Sir,

It is here by declared that PWD, GNCT of Delhi is committed to follow the principle of transparency, equity and competitiveness in public procurement.

The subject Notice Inviting Tender (NIT) is an invitation to offer made on the condition that the Bidder will sign the Integrity Agreement, which is an integral part of tender/bid documents, failing which the tenderer/bidder will stand disqualified from the tendering process and the bid of the bidder would be summarily rejected.

This declaration shall form part and parcel of the Integrity Agreement and signing of the same shall be deemed as acceptance and signing of the Integrity Agreement on behalf of the PWD, GNCTD.

Yours faithfully

Executive Engineer

To,
 Executive Engineer,
 -----,

Sub:- Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)

Dear Sir,

I/We acknowledge that CPWD is committed to follow the principles thereof as enumerated in the Integrity Agreement enclosed with the tender/bid document.

I/We agree that the Notice Inviting Tender (NIT) is an invitation to offer made on the condition that I/We will sign the enclosed integrity Agreement, which is an integral part of tender documents, failing which I/We will stand disqualified from the tendering process. I/We acknowledge that THE MAKING OF THE BID SHALL BE REGARDED AS AN UNCONDITIONAL AND ABSOLUTE ACCEPTANCE of this condition of the NIT.

I /We confirm acceptance and compliance with the Integrity Agreement in letter and spirit and further agree that execution of the said Integrity Agreement shall be separate and distinct from the main contract, which will come into existence when tender/bid is finally accepted by CPWD. I/We acknowledge and accept the duration of the Integrity Agreement, which shall be in the line with Article I of the enclosed Integrity Agreement.

I/We acknowledge that in the event of my/our failure to sign and accept the Integrity Agreement, while submitting the tender/bid, CPWD shall have unqualified, absolute and unfettered right to disqualify the tenderer/bidder and reject the tender/bid in accordance with terms and conditions of the tender/bid.

Yours faithfully

(Duly authorized signatory of the Bidder)

To be signed by the bidder and same signatory competent/authorized to sign the relevant contract on behalf of CPWD.

INTEGRITY AGREEMENT

This Integrity Agreement is made at ----- on this ----- day of -----20-----

BETWEEN

President of India represented through Executive Engineer -----

(Name of Division)

PWD, -----, (Hereinafter referred as the

(Address of Division)

‘Principal /Owner’, which expression shall unless repugnant to the meaning or context hereof include its successors and permitted assigns)

AND

(Name and Address of the Individual /firm/Company)

Through ----- (Hereinafter referred to as the

(Details of duly authorized signatory)

“Bidder/Contractor” and which expression shall unless repugnant to the meaning or context hereof include its successors and permitted assigns).

Preamble

WHEREAS the Principal /Owner has floated the Tender (NIT No.) (hereinafter referred to as “**Tender/Bid**”) and intends to award, under laid down organizational procedure, contract for -----

(Name of work)

hereinafter referred to as the “**Contract**”

AND WHEREAS the Principal /Owner values full compliance with all relevant laws of the land, rules, regulations, economic use of resources and of fairness/ transparency in its relation with its Bidder(s) and Contractor(s).

AND WHEREAS to meet the purpose aforesaid both the parties have agreed to enter into this Integrity Agreement (hereinafter referred to as “**Integrity Pact**” or “**Pact**”), the terms and conditions of which shall also be read as integral part and parcel of the Tender/Bid documents and Contract between the parties.

NOW, THEREFORE, in consideration of mutual covenants contained in this Pact, the parties hereby agree as follows and this Pact witness as under:

Articles

Article-1: Commitments of the Principal

(1) The principal commits itself to take all measures necessary to prevent corruption and to observe the following principles:

- (a) No employee of the principal, personally or through any of his/her family members, will in connection with the Tender for, or the execution of a Contract, demand, take a promise for or accept, for self, or third person, any material or immaterial benefit which the person is not legally entitled to.
- (b) The principal will, during the Tender process, treat all Bidder(s) with equity and reason. The principal will in particular, before and during the Tender process, provide to all Bidder(s) the same information and will not provide to any Bidder(s) confidential/ additional information through which the Bidder(s) could obtain an advantage in relation to the tender process or the contract execution.

CORRECCION-----NIL-----

DELETION-----NIL-----

INSERTION-----NIL-----

AE (P)

EE (P)

- (c) The principal shall endeavor to exclude from the tender process any person, whose conduct in the past has been of biased nature.
- (2) If the Principal obtains information on the conduct of any of its employees which is a criminal offence under the Indian Penal Code (IPC)/Prevention of Corruption Act, 1988 (PC Act) or is in violation of the principles herein mentioned or if there be a substantive suspicion in this regard, the principal will inform the Chief Vigilance Officer and in addition can also initiate disciplinary actions as per its internal laid down policies and procedures.

Article-2: Commitments of the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s).

1. It is required that each Bidder/ Contractor (including their respective officer, employees and agents) adhere to the highest ethical standards, and report to the Government / Department all suspected acts of fraud or corruption or Coercion or Collusion of which it has knowledge or become aware, during the tendering process and throughout the negotiation or award of a contract.
2. The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) commit himself to take all measures necessary to prevent corruption. He commits himself to observe the following principles during his participation in the tender process and during the contract execution.
 - (a) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will not, directly or through any other person or firm, offer, promise or give to any of the principal's employees involved in the tender process or the execution of the contract or to any third person any material or other benefit which he/she is not legally entitled to, in order to obtain in exchange any advantage of any kind whatsoever during the tender process or during the execution of the contract.
 - (b) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will not enter with other Bidders into any undisclosed agreement or understanding, whether formal or informal. This applies in particular to prices, specifications, certifications, subsidiary contract, submission or non-submission of bids or any other actions to restrict competitiveness or to cartelize in the bidding process.
 - (c) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will not commit any offence under the relevant IPC/PC Act and other Statutory Acts; further the Bidder(s)/Contractor(s)/ Concessionaire(s)/Consultant(s) will not use improperly, (for purposes of competition or personal gain), or pass on to others, any information or document provided by the Principal as part of the business relationship, regarding plans, technical proposals and business details, including information contained or transmitted electronically.
 - (d) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) of foreign origin shall disclose the name and address of the Agents/ Representatives in India, if any. Similarly, the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) of Indian Nationality shall disclose names and addresses of foreign agents/ representatives, if any. Either the Indian agent on behalf of the foreign principal or the foreign principal directly could bid in a tender but not both. Further, in cases where an agent participates in a tender on behalf of one manufacturer, he shall not be allowed to quote on behalf of another manufacturer along with the first manufacturer in a subsequent/ parallel tender for the same item.
 - (e) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will, when presenting his bid, disclose any and all payments he has made, is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract.
 - (f) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) Who have signed the integrity Pact shall not approach the courts while representing the matter to IEMs and shall wait for their decision in the matter
3. The Bidder(s)/ Contractor(s) will not instigate third person to commit offences outlined above or be an accessory to such offences.

4. The Bidder(s)/ Contractor(s) will not, directly or through any other person or firm indulge in fraudulent practice, willful misrepresentation or omission of facts or submission of fake/forged documents in order to induce public official to action reliance thereof, with the purpose of obtaining unjust advantage by or causing damage to justified interest to other and/or to influence the procurement process to the detriment of the Government interests.
5. The Bidder(s)/ Contractor(s) will not, directly or through any other or firm use coercive practices (which shall include the act of obtaining something, compelling an action or influencing a decision through intimidation, threat or the use of force directly or in directly, where potential or actual injury may befall upon a person, his/her reputation or property) to influence their participation in the tendering process.

Article–3: Consequences of Breach

Without prejudice to any right that may be available to the principal under law or the contract or its established policies and laid down procedures, the principal shall have the following rights in case of breach of this Integrity Pact by the Bidder(s)/Contractor(s) and the Bidder/ Contractor accepts and undertakes to respect and uphold the principal absolute right.

- (1) If the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s), either before award or during execution of contract has committed a transgression through a violation of Article 2, above or in any other form such as to put his reliability or credibility in question, the Principal after giving 14 days' notice to the contractor shall have powers to disqualify the Bidder(s) Contractor(s) from the Tender process or terminate/determine the contract, if already executed or exclude the Bidder/ Contractor from future contract award processes. The imposition and duration of the exclusion will be determined by the severity of transgression and determined by the principal. Such exclusion may be forever or for a limited period as decided by the principal.
- (2) Forfeiture of Earnest Money Deposit/Performance Guarantee/Security Deposit: If the Principal has disqualified the Bidder(s) from the tender Process prior to the award of the Contract or terminated/determined the contract or has accrued the right to terminate/determine the contract according to Article 3(1), the Principal apart from exercising any legal rights that may have accrued to the Principal, may in its considered opinion forfeit the entire amount of Earnest Money Deposit/Performance Guarantee and Security Deposit of the Bidder/Contractor.
- (3) Criminal Liability: If the Principal obtains knowledge of conduct of a Bidder/ Contractor/Concessionaire/ Consultant or subcontractor, or of an employee or a representative or an associate of a Bidder/ Contractor/ Concessionaire/ Consultant or Subcontractor, which constitutes corruption, within the meaning of PC Act, or if the principal has substantive suspicion in this regard, the principal will inform the same to law enforcing agencies for further investigation.

Article–4: Previous Transgression

- (1) The Bidder declares that no previous transgressions occurred in the last 3 years with any other Company in any a country conforming to the anti-corruption or with Central Government or state Government or any other Central/State Public Sector Enterprises in India that could justify his exclusion from the tender process.
- (2) If the Bidder makes incorrect statement of this subject, he can be disqualified from the tender process or action can be taken for banning of business dealings/holiday listing of the Bidder/ Contractor as deemed fit by the principal.

- (3) If the Bidder/Contractor can prove that he has resorted/recouped the damage caused by him and his installed a suitable corruption prevention system, the principal may, at its own discretion, revoke the exclusion prematurely.

Article – 5: Equal treatment of all Bidders/ Contractors/ Concessionaires/ Consultants/ Subcontractors.

- (1) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) undertake(s) to demand from all sub-contractors a commitment in conformity with this Integrity Pact, The Bidder/Contractor shall be responsible for any violation(s) of the principles laid down in this agreement by any of its Subcontractors/ Sub-vendors.
- (2) The principal will enter into pacts on identical terms as this one with all Bidders and Contractors.
- (3) The principal will disqualify Bidders who do not submit the duly signed integrity Pact between the Principal and the Bidder Along with the Tender or violate its provisions at any stage of the Tender process,

Article–6: Duration of the Pact

This integrity Pact begins when both the parties have legally signed it. It expires for the Contractor 12 months after the completion of work under the contract or expiry of defect liability period or last payment made under the contract, whichever is later and for all other bidders, 180 Days after the Contract has been awarded.

If any claim is made/lodged during this time, the same shall be binding and continue to be valid despite the lapse of this integrity Pact as specified above, unless it is discharged/determined by the ADG/SDG, PWD concerned.

Article–7: Other Provisions.

- (1) This Integrity pact is subject to Indian Law. Place of performance and jurisdiction is the Head quarter of the Division of the Principal, who has floated the tender.
- (2) Changes and supplements as well as termination notices need to be made in writing.
- (3) If the Bidder/Contractor/Concessionaire/Consultant is a partnership or a consortium this integrity Pact must be signed by all the partner or by one or more partner and consortium members. In case of a company, the integrity Pact must be signed by a representative duly authorized by board resolution.
- (4) Should one or several provisions of this integrity Pact turn out to be invalid, the remainder of this Pact remains valid. In this case, the parties will strive to come to an agreement to their original intentions.
- (5) It is agreed term and condition that any dispute or difference arising between the parties with regard to the terms of this Integrity Pact, any action taken by the Principal in accordance with this Integrity Pact or interpretation thereof shall not be subject to arbitration.
- (6) In view of the nature of integrity pact, the integrity pact is irrevocable and shall remain valid even if the main tender/contract is terminated till the currency of the integrity pact.

Article –8: Legal and Prior Rights

All rights and remedies of the parties hereto shall be in addition to all the other legal rights and remedies belonging to such parties under the Contract and /or law and the same shall be deemed to be cumulative and not alternative to such legal rights and remedies aforesaid. For the sake of brevity, both the Parties agree that this Integrity Pact will have precedence over the Tender/Contract documents with regard to any of the provisions covered under this Integrity Pact.

IN WITNESS WHEREOF the parties have signed and executed this Integrity Pact at the place and date first above mentioned in the presence of following witnesses.

.....

(For and on behalf of Principal)

.....

(For and on behalf of Bidder/Contractor)

WITNESSES:

1

(Signature, name and address)

2

(Signature, name and address)

Place:

Dated:

Note: To be signed by the Bidder and the Engineer-in-Charge

GENERAL SPECIFICATIONS

1. The work in general shall be executed as per the description of the item, specification attached, MORTH specifications for road and bridge works 2013 (5th revision), CPWD Specifications 2019 Vol. I & II with correction slips up to the date of tender notice.
2. In case of any variation between different applicable specifications, the following order of precedence be followed:
 - i) Nomenclature of item
 - ii) Particular specifications attached with the tender document.
 - iii) MORTH specifications 2013 (5th revision). The word “MORTH specifications” or “MORTH Specifications 2013” appearing anywhere means the same as above.
 - iv) CPWD specifications 2019 Vol. I & II with correction slips upto the date of tender notice.
3. The contractor shall be required to produce samples of all road materials sufficiently in advance to obtain approval of the Engineer-in-Charge. Subsequently the materials to be used in the actual execution; of the work shall strictly conform to the quality of samples approved. In case of variation, such materials shall be liable to rejection.
4. All the materials obtained from Government stores or otherwise shall be got checked by the Junior Engineer/ Assistant Engineer in-charge of the work, on receipt of the same at site before use.
5. All the materials used in the work shall comply with the requirements of Engineer-in-charge and shall pass all the test and analysis required by him as per particular specifications as applicable or such recognized specifications as acceptable to the Engineer-in-charge.
6. The contractor shall be required to provide appliances at site, such as weighing scale, graduated cylinder, standard sieves, thermometer, slump cones, electric oven Proctor moulds etc. in order to enable the Engineer-in-charge to conduct field tests to ensure that the quality is consistent with the prescribed specifications and nothing extra shall be paid on this account.
7. The contractor shall at his cost, make all arrangements and shall provide such facilities as the Engineer- in-charge may require for collecting, preparing and forwarding the required number of samples for tests and for analysis at such time and to such places as directed by the Engineer-in-charge. Nothing extra shall be paid for the above, including the cost of material to be tested.
8. The necessary tests shall be conducted in the laboratory of Central Road Research Institute, IIT Delhi, JMI Delhi, NIT Delhi, any Government Engineering Collage are allowed by Engineer-in-Charge without prior approval of any higher authority /officer provided these labs have all necessary facility to carry out the required tests, or any other laboratory approved by the Engineer-in-charge. The sample for carrying out all or any of the tests shall be collected by the Engineer-in-charge or on the behalf of the Officer-in-charge of the quality control wing of Central Design Office, CPWD and his authorised subordinate or by the officer-in-charge, PWD (NCTD) laboratory and his authorised subordinate for carrying out the independent quality control tests and the results will be binding on the contractor. **All expenditure to be incurred for testing of samples e.g. packing sealing transportation, loading, unloading etc including testing charges for all materials etc shall be borne by the contractor, irrespective of the norms of test results.**
9. The contractor his authorized representative shall associate in collection, preparation, forwarding and testing of such samples. In case he or his authorised representative is not present or does not associates himself, the results of such tests and consequences thereon shall be binding on the contractor.

10. **Before execution of any repair work on existing drain / footpath, the premeasurement are to be recorded and duly signed by contractor, JE, AE and submit to take prior approval from Engineer-in-Charge.**
11. The contractor shall get the water tested with regard to its suitability for use on the works and get approval from the Engineer-in-charge before he proceeds with the use of same for execution of works.
12. Wherever any reference to any Indian Standard specifications and/or IRC codes occurring the documents relating to this contract same shall be inclusive of all amendments issued there to or revision thereof if any, up to date of the tender notice.
13. The contractor must take adequate precautions to ensure that no spillage of construction materials takes place on the carriageway. The spillage of construction material should be removed with in 24 hour notice. Failure to which, the material will be removed by the Engineer-in Charge and the cost of removal shall be recovered from the Contractor.

SPECIAL CONDITIONS

1. All setting out activities concerning establishment of bench marks, theodolite stations, centre line pillars, etc. including all materials, tools, plants, equipments, theodolite and all other instruments, labour etc. required for performing all the functions necessary and ancillary thereto at the commencement of the work, during the progress of the work and till the completion of the work shall be carried out by the contractor
2. The contractor shall carry out true and proper setting out of the work under the supervision of the Engineer-in-Charge or his authorized representatives and shall be responsible for the correctness of the positions, levels, dimensions and alignments of all parts of the Road. If at anytime, during the progress of the work, any error appears or arises in the position, level, dimensions or alignment of any part of the work, the contractor on being asked to do so by the Engineer-in-charge, shall rectify such error to the entire satisfaction of the Engineer-in-Charge. The supervision and/or checking by the Engineer-in- Charge or his authorised representatives shall not relieve the contractor of his responsibility for the correctness of any setting out of any line or level. The contractor shall carefully protect and preserve all bench marks, pegs and pillars provided for the setting out of works.
3. Some restrictions may be imposed by the concerned authorities on quarrying of sand, stone etc. from certain areas. For timely completion of work, the contractor shall have to bring such material from other quarries located elsewhere, and nothing extra shall be payable on this account.
4. Unless otherwise specified in the Schedule of Quantities, the rates for all items of work shall be considered as inclusive of working in or underwater and/or liquid mud and/or foul conditions including pumping or bailing out liquid mud or water accumulated in excavations during the progress of the work from springs, tidal or river seepage, rain, broken water mains or drains and seepage from subsoil aquifer.
5. Stacking of materials and excavated earth including its disposal shall be done as per the directions of the Engineer-in-Charge. Double handling of materials or excavated earth, if required, shall have to be done by the contractor at his own cost.
6. The contractor or his authorized representative shall associate in collection, preparation, forwarding and testing of such samples. In case he or his authorized representative is not present or does not associate himself, the Engineer-in-Charge shall do the needful or getting the samples collected and tested; the result of such tests and consequences thereof shall be binding on the contractor.
7. Other agencies working at site may also simultaneously execute the works entrusted to them and to facilitate their working, the contractor shall make necessary provisions e.g. holes, openings, etc. for laying/burying pipes, cables, conduits, clamps, hooks etc. as may be required from time to time.
8. Existing drains, pipes, cables, overhead wires, sewer lines, water line and similar services encountered in the course of the execution of the work shall be protected against the damage by the contractor. The contractor shall not store materials or otherwise occupy any part of the site in a manner likely to hinder the operation of such services.
9. On account of security consideration, there could be some restrictions on the working hours, movement of vehicles for transportation of materials and location of labour camp. The contractor shall be bound to follow all such restrictions and adjust the programme for execution of work accordingly.

10. **SAFETY OF LABOUR:**

- (i) For the safety of all labour directly or indirectly employed in the work for the performance of the contractor's part of this agreement, the contractors shall, in addition to the provision of CPWD safety code and directions of the Engineer-in-Charge, make all arrangements to provide facility as per the provision of Indian Standard Specifications (Codes) listed below & nothing extra shall be paid on this account:

IS3696PartI

Safety Code for Scaffolds and ladders.

CORRECION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

IS 3696 Part II	Safety Code for Scaffolds and ladders Part II
ladders. IS 3764	Safety Code for excavation work.
IS4138	Safety Code for working in compressed air.
IS7293	Safety Code for working with construction machinery.
IS7969	Safety Code for storage and handling of building materials.
IS4130	Safety Code for demolition of buildings

11. Nothing extra shall be paid for cartage of any material to the site of work.
12. The contractor must take adequate precaution to ensure that no spillage of construction material takes place on to the carriageway. Failure to observe this will make the contractor liable to pay compensation @ Rs.200/- (Rs. Two Hundred Only) per day per metre length of each carriage way as affected by spill over of any construction material subject to a maximum of 5% (Five percent) of tendered cost of the work put to tender. The decision of Engineer-in-Charge in this regard shall be final and binding on the contractor.
13. The right to carry out the work either in conformity with or in a manner entirely different from the terms of this tender document that may be considered most suitable before or subsequent to the receipt of tenders due to exigencies of work, is reserved with the Engineer-in-Charge.
14. For the execution of any items of work where any incidental work is actually required but not specifically stated in the tender, it is to be understood that the rate quoted by the contractor shall cover such charges also and nothing extra on account of such incidental charges, if any, shall be paid.
15. The contractor shall maintain in good condition all work till the completion of entire work allotted to him. From the commencement of the work to the completion of the same, the work is to be under the contractor's charge. The contractor is to be held responsible for and to make good all injuries, damages and repairs, caused by fire, rain, traffic, floods or other natural calamities and no payment shall be made to the contractor on this account. Engineer-in-Charge shall not be held responsible for any claims for injuries to persons/ work men or for structural damage to property happening from any neglect, default, want of proper care or misconduct on the part of the contractor or any other of his authorized representatives in his employment during the execution of the work. The compensation, if any, shall be paid directly to the department/authority/persons concerned, by the contractor at his own cost.
16. Engineer-in-Charge shall have full powers to send workmen and employ on the premises to execute fittings and other work not included in the contract. For whole operations the contractor is to afford every reasonable facility during ordinary working hours provided such operations are carried out in such a manner as not to impede the progress so of work included in this contract, in the opinion of Engineer-in-Charge.
17. At the time of construction, contractor shall embed all electrical/other fixtures like base plates, brackets, conduits, etc. for street lighting, etc. as per the directions of the Engineer-in-Charge. Nothing extra. whatsoever will be payable on this account.
18. The contractor shall provide and bear all expenses and charges for special or temporary service roads required by him in connections with access to the site (except for the purpose of diversion of traffic as directed by the Engineer-in-Charge), at no extra charges and his quoted rate shall deem to include the same. He shall alter, adopt or maintain the same as required from time to time or as directed by the Engineer-in-Charge. The department shall have right of way to this at all times and will not entitle the contractor to claim extra on this account.
19. Apart from concrete block at bottom the post of each adjacent railing unit shall be fixed and kept in position through welding at site of sufficient strength so as to prevent their lateral movement and to make the entire railing work a composite single unit to check against pilferage and disturbance / damaging any unit of railing.

GENERAL CONDITIONS

1.0 General

Specifications & Order of preference:

1.1.1 Except for the items, for which Particular Specifications are given or where it is specifically mentioned otherwise in the description of the items in the schedule of quantities, the work shall generally be carried out in accordance with the “CPWD Specifications 2019 Vol. I & II” with up-to-date correction slips, additional / Particular Specifications, Architectural / structural drawings and as per instructions of Engineer-in-Charge.

1.1.2 The several documents forming the tender are to be taken as mutually complementary to one another. Detailed drawings shall be followed in preference to small scale drawings and figured dimensions in preference to scaled dimensions.

1.1.3 If there is any difference or discrepancy between the description of items as given in the schedule of quantities, particular specifications for individual items of work (including special conditions) and I.S. Codes etc., the following order of preference shall be observed

Description of items as given in Schedule of Quantities.

Particular Specifications, Special Conditions and Additional conditions, if any.

Drawings.

CPWD Specifications.

General conditions of contract for CPWD works.

Indian Standard Specifications of B.I.S.

Manufacturers' specifications & as decided by Engineer-in-charge.

Sound Engineering practices.

“In the event of any variation/ discrepancy in the drawings, specifications and tender documents etc. the decision of the Engineer-in-charge shall be final binding and conclusive on the contractor and in the case, the contractor has any doubt and the same should be got clarified immediately from the Engineer-in-charge and no claim of the contractor shall be entertained thereafter. Moreover, the agency is not allowed to take benefit out of any clerical/ grammatical mistake in the standard clauses/Schedule of Quantities/Specifications etc. being used in the agreement”.

If there are varying or conflicting provisions made in any document forming part of the contract, the Accepting Authority shall be the deciding authority with regard to the intention/interpretation of the tender and his decision shall be final and binding on the contractor.

1.1.4 Any reference made to any Indian Standard Specifications, shall imply to the latest version of that standard, including such revisions / amendments as issued by the Bureau of Indian Standards up to last date of receipt of tenders. The Contractor shall keep, at his own cost, all such publications including relevant Indian Standard Codes applicable to the work at site.

1.2 Scope:

1.2.1 The works to be governed by this contract shall cover delivery and transportation up to destination, safe custody at site, insurance, erection, testing and commissioning and maintaining of the entire works.

1.2.2 The works to be undertaken by the contractor shall inter alia include the following: Preparation of AS-BUILT drawings wherever applicable. Obtaining of Statutory permissions wherever applicable and required. Pre-commissioning tests as per relevant standard specifications, code of practice, Acts and Rules wherever required. Warranty obligation for the equipment's and/or fittings/fixtures supplied by the contractor.

- 1.2.3** If required, Contractor shall provide all the shop drawings or layout drawings for all the co-ordinated services before starting any work or placing any order for any of the services etc. These shop drawings/layout drawings shall be got approved from Engineer-in-charge before implementation and this shall be binding on the contractor. The contractor shall submit material submittals along with material sample for approval of Engineer-in-charge prior to delivery of material at site.
- 1.2.4** All the hidden items such as water supply lines, drainage pipes, conduits, sewers etc. are to be properly tested as per the design conditions before covering and their measurements in computerized measurement book duly test checked shall be deposited with Engineer in charge or his authorized representative, prior to hiding these items.
- 1.3** Deployment of Technical staff & skilled labour:
- 1.3.1** The quality of work is of paramount importance. Contractor shall have to engage well experienced skilled labour and deploy modern T&P and other equipment's to execute the work to provide the desired quality.
- The Contractor shall depute Site Engineer & skilled workers as required for the work. He shall submit organization chart along with details of Engineers and supervisory staff. It shall be ensured that all decision-making powers shall be available to the representatives of the contractor at site itself to avoid any likely delays on this account. The contractor shall also furnish list of persons for specialized works to be executed for various items of work. The Contractor shall identify and deploy key persons having qualifications and experience in the similar and other major works, as per the field of their expertise. If during the course of execution of work, the Engineer-in-Charge is of the opinion that the deployed staff is not sufficient or not well experienced; the Contractor shall deploy more staff or better-experienced staff at site to complete the work with quality and in stipulated time limit. The Project Manager of the contractor having minimum twenty years of experience in similar nature of work along with all technical staff as mentioned in the clause 32 of the GCC, shall always be available at the site during execution of work.
- 1.4** Removal of Machinery, Tools & Equipment:
- 1.4.1** Removal of machinery, tools & equipment shall be allowed to be moved away from the site only when, in written opinion of Engineer-in-Charge, the same are no longer required at site of work.
- 1.5** **Soil conditions of site:**
- 1.5.1** Contractor(s) shall study the soil investigation report, if any, for the site, and satisfy himself about complete characteristics of soil and other parameters at site. No claim whatsoever on account of any discrepancy between the sub-surface strata conditions that may be encountered at the time of execution of the work and those given in soil report, in-accuracy or interpretation thereof shall be entertained from the Contractor under any circumstances. The ground water table is in variable condition and the information given in the report is only indicative and it may vary from time to time.
- 1.6** **Site condition:**
- 1.6.1** The tenderer shall acquaint himself with the site of work and see the approaches to the site. In case any approach from main road is required at site or existing approach is to be improved and maintained for cartage of materials by the contractor, the same shall be provided, improved and maintained by the contractor at his own cost.
- 1.7** **Precautionary measures:**
- 1.7.1** Contractor shall take all precautionary measures to avoid any damage to adjoining property. All necessary arrangement shall be made at his own cost. The contractor shall

take all precautions to prevent his workmen and employees from removing and damaging any Flora (plant/vegetation) from the campus/site.

1.7.2 The contractor shall take all precautions to avoid accidents by exhibiting necessary caution boards day and night, speed limit boards, red flags, red lights and providing barriers. He shall be responsible for all damages and accidents caused to work due to negligence on his part. No hindrances shall be caused to traffic, during the execution of the work. In case of any accident of the labourers/ contractual staff, the entire responsibility will rest on the contractor and any compensation under such circumstances, if becomes payable, shall be entirely borne by the contractor.

1.7.3 The contractor, his authorized representative, workmen etc. shall strictly observe orders pertaining to fire precautions prevailing in the area.

1.7.4 The Contractor shall take all necessary precautions to prevent any nuisance or inconvenience to the owners, tenants or occupants of the adjacent properties and to the public in general. The Contractor shall take all care, as not to damage any other adjacent property or other services running adjacent to the plot. If any damage is done, the same shall be made good by the Contractor at his own cost and to the entire satisfaction of the Engineer-in-Charge. The Contractor shall use such methodology and equipment's for execution of the work, so as to cause minimum environmental pollution of any kind during construction, to have minimum construction time and minimum inconvenience to road users and to the occupants of the buildings on the adjacent plot and public in general, etc. He shall make good at his own cost and to the entire satisfaction of the Engineer in Charge any damage to roads, paths, cross drainage works or public or private property whatsoever caused, due to the execution of the work or by traffic brought thereon, by the Contractor. Further, the Contractor shall take all precautions to prevent any pollution of streams and waterways. All waste or superfluous materials shall be carted away by the Contractor, entirely to the satisfaction of the Engineer-in-Charge. Utmost care shall be taken to keep the noise level to the barest minimum so that no disturbance, as far as possible, is caused to the occupants / users of adjoining buildings. No claim, what so ever, on account of site constraints mentioned above or any other site constraints not specifically stated here, shall be entertained from the Contractor. Therefore, the Contractors are advised to visit site and get firsthand information of site constraints. Accordingly, they should quote their tenders. Nothing extra shall be payable on this account.

1.8 General cleanliness of the site and Stacking & Storage of Materials:

1.8.1 The site of work shall be always kept clean in general strictly adhering to approved job layout and green building parameters. The Contractor shall take all care to prevent any water- logging at site. The waste water shall not be allowed to be collected at site. It may be directly pumped into the public drainage system with prior approval of the concerned authorities. For discharge into public drainage system, necessary permission shall be obtained from concerned authorities after paying the necessary charges, if any, directly to the authorities. The work shall be carried out in such a way that the area is kept clean and tidy. All the fees/charges in this regard shall be borne by the Contractor. Nothing extra shall be payable on this account.

1.8.2 The contractor shall take instructions from the Engineer-in-Charge regarding collection and stacking of materials at any place. No excavated earth or building rubbish shall be stacked on areas where other buildings, roads, compound wall, services etc are to be constructed.

1.8.3 For works which are likely to generate malba / rubbish, the contractor shall dispose of malba, rubbish & other unserviceable materials and wastes at his own cost or as

specified in agreement items to the notified/ specified dumping ground and under no circumstances these shall be stacked / dumped even temporarily, outside the construction premises.

1.9 Lab Equipment:

The contractor shall provide at his own cost suitable weighing, surveying and levelling and measuring arrangements as may be necessary at site for checking. All such equipment's shall be got calibrated in advance from laboratory, approved by the Engineer-in-Charge. Nothing extra shall be payable on this account. A site laboratory with the minimum equipment's as specified in NIT shall be established, made functional and maintained within 30 days from the award of the work without any extra cost to the department.

1.10 Setting Out

1.10.1 The contractor shall establish, maintain and assume responsibility for grades, lines, levels and bench marks. He shall report any errors or inconsistencies regarding grades, lines, levels, dimensions to the Engineer-in-Charge before commencing work. Commencement of work shall be regarded as the contractor's acceptance of such grades, lines, levels and dimensions and no claim shall be entertained at a later date for any errors found.

1.10.2 In order to set the alignment of buildings / foundations / paths/Drains and to mark the same on the ground, the agency is to adopt "total station" surveying method. The agency is to engage a well versed and well experienced surveyor in "total station" survey. Nothing extra for this total station survey is payable.

If at any time, any error in the respect of setting out appears during the progress of the work, the contractor shall, at his own expense rectify such error if so required, to the satisfaction of the Engineer-in-Charge.

Though the site levels are indicated in the drawings, the contractor shall ascertain himself and confirm the site levels with respect to GTS bench mark from the concerned authorities. The contractor shall protect and maintain temporary/ permanent benchmarks at the site of work throughout the execution of the work. These bench marks shall be got checked by the Engineer-in-Charge or his authorized representatives. The work at different stages shall be checked with reference to bench marks maintained for the said purpose. Nothing extra shall be payable on this account

The approval by the Engineer-in-Charge, of the setting out by the contractor, shall not relieve the contractor of any of his responsibilities and obligation to rectify the errors/defects, if any, which may be found at any stage during the progress of the work or after the completion of the work.

1.10.3 The contractor shall be entirely and exclusively responsible for the horizontal, vertical and other alignments, the level and correctness of every part of the work and shall rectify effectively any errors or imperfections therein. Such rectifications shall be carried out by the contractor at his own cost to the instructions and satisfaction of the Engineer-in-Charge.

1.11 Temporary Water, Electricity & Telephone Connections:

1.11.1 The contractor shall make his own arrangements for water including boring of tube wells etc. if necessary and for electricity by obtaining electric connections and by providing diesel generators of adequate capacity, if required and make necessary payments directly to the State Govt. departments concerned. Necessary approval shall be taken by the contractor from the ground water department for boring of tube wells, if required. Nothing extra shall be paid on these accounts. Contractor shall get the water tested from laboratory approved by the Engineer-in-charge at regular interval as per the CPWD

Specifications 2019 with regard to its suitability and conforming to the relevant IS Code. The contractor shall obtain written approval from the Engineer-in-Charge before he proceeds by using the same for execution of work. The contractor shall arrange Municipal water at his own cost or if he intends to use tube well water, he will have to install a RO plant to treat the water, if required, as the tube well maynot be suitable for construction and nothing extra shall be paid to the contractor on this account. Water charges shall not be recovered in case arrangement of water is made at his own by the contractor. All expenses towards collection of samples, packing, transportation including testing charges etc. shall be borne by the contractor. The contractor shall obtain environmental and pollution clearance for the diesel generators. Nothing extra shall be paid on this account.

- 1.11.2** The Contractor shall arrange electricity at his own cost for testing of the various electrical installations as directed by Engineer-in-Charge and for the consumption by the contractor for executing the work. Also, all the water required for testing various electrical installations and also testing water supply, sanitary and drainage lines, water proofing of underground sump, overhead tanks, water proofing treatment etc. shall be arranged by the contractor at his own cost. Nothing extra shall be payable on this account.
- 1.11.3** Arrangement of temporary telephone connection, water and electricity required by Contractor, shall be made by him at his own cost and also necessary permissions shall be obtained by him directly from concerned authorities, under intimation to the Department. Also, all initial cost and running charges, and security deposit, if any, in this regard shall be borne by him. The Contractor shall abide by all the rules/ bye laws applicable in this regard and he shall be solely responsible for any penalty on account of violation of any of the rules / byelaws in this regard. Nothing extra shall be payable on this account.
- 1.11.4** The Contractor shall be responsible for maintenance and watch and ward of the complete installation and water / electricity meter and shall also be responsible for any pilferage, theft, damage, penalty etc. in this regard. The Contractor shall indemnify the Department against any claim arising out of pilferage, theft, damage, penalty etc. whatsoever on this account. Security deposit for the work shall be released only after No Dues Certificates are obtained from the local Authorities from whom temporary electric/ water / telephone connection have been obtained by the Contractor. Nothing extra shall be payable on this account.
- 1.11.5** The Department shall in no way be responsible for either any delay in getting electric and/or water and/or telephone connections for carrying out the work or not getting connections at all. No claim of delay or any other kind, whatsoever, on this account shall be entertained from the Contractor. Also, contingency arrangement of stand-by water & electrical supply shall be made by the Contractor for commencement and smooth progress of the work so that work does not suffer on account of power failure or disconnection or not getting connection at all. No claim of any kind whatsoever shall be entertained on this account from the Contractor. Nothing extra shall be payable on this account.
- 1.12.** The information and site data shown in the drawings and mentioned herein and also elsewhere in the tender documents are being furnished for general information and guidance only. The department shall not bear responsibility for lack of such knowledge and also the consequences thereof. The Engineer-in-charge in no case shall be held responsible for the accuracy thereof or any interpretation/ or conclusions drawn there from by the contractor.

1.13 Scaffolding & Staging:

- 1.13.1** Wherever required for the execution of work, all the scaffolding shall be provided and suitably fixed, by the contractor. The scaffolding shall be provided strictly with steel double scaffolding system, suitably braced for stability, with all the accessories, gangways, etc with adjustable suitable working platforms to access the areas with ease for working and inspection. Single scaffolding system is strictly prohibited and shall invite necessary action. It shall be designed to take all incidental loads. It should cater to the safety features for workmen. Nothing extra shall be payable on this account. It shall be ensured that no damage is caused to any structure due to the scaffolding.
- 1.13.2** The contractor should submit the shop drawings of staging and shuttering for approval of Engineer-in-Charge before actually commencing the execution of work under the item. Nothing extra shall be payable on this account.

1.14 Co-ordination with other agencies:

- 1.14.1** The Contractor shall conduct his work so as not to interfere with or hinder the progress of the work being performed by other Contractors or by the Engineer-in-Charge. As far as possible, he shall arrange his work and place, so as not to interfere with the operations of other Contractors or shall arrange his work with that of the others, in an acceptable and coordinated manner and shall perform it in proper sequence.
- 1.14.2** Other agencies may also simultaneously execute and install the works and the contractor shall afford necessary facilities for the same. The contractor shall leave such recesses, holes, openings, trenches etc. as may be required for such related works (for which inserts, sleeves, brackets, conduits, base plates, clamps etc. shall be available as specified elsewhere in the contract) and the contractor shall fix the same at the time of casting of concrete, stone work and brick work, if required, and nothing extra shall be payable on this account.
- 1.14.3** The Contractor shall cooperate with and provide the facilities to the associate-Contractors and other agencies working at site for smooth execution of the work. The Contractor shall –
- Allow use of scaffolding already erected, toilets, sheds etc.
 - Properly co-ordinate their work with the work of other Contractors.
 - Provide control lines and benchmarks to his associate-Contractors and the other Contractors.
 - Provide electricity and water at mutually agreed rates.
 - Provide hoist and crane facilities for lifting material at mutually agreed rates.
 - Co-ordinate with other Contractors for leaving inserts, making chases, alignment of services etc. at site.
 - Adjust work schedule and site activities in consultation with the Engineer-in-Charge and other Contractors to suit the overall schedule completion.
 - Resolve the disputes with other Contractor amicably and the Engineer-in-Charge shall not be made intermediary or arbitrator. The contractor shall indemnify the Department against any claim(s) arising out of such disputes.

1.15 Procurement of materials:

- 1.15.1** All material shall only be brought at site as per program finalized with the Engineer-in-Charge. Any pre-delivery of the material not required for immediate consumption shall not be accepted and thus not paid for.
- 1.15.2** The contractor shall procure the required materials in advance so that there is sufficient time for testing of the materials and approval of the same before use in the work.

1.16 Protection of Existing Services & buildings and Materials:

- 1.16.1** Existing drains, pipes, cables, over-head wires, sewer lines, water lines and similar

- services encountered in the course of the execution of work shall be protected against the damage by the contractor at his own expense. The contractor shall not store materials or otherwise occupy any part of the site in a manner likely to hinder the operation of such services. In case temporary supporting of such services is required to facilitate the work, the same shall be done by the contractor at no extra cost.
- 1.16.2** In case the existing services are to be shifted permanently, then before dismantling the existing services, alternate/diversion of service lines has to be laid by the contractor so that there is no interruption in use of existing services. The contractor has to plan the alternate suitable route for diversion/shifting of service lines and get the same approved from the Engineer-in-Charge before starting shifting of services. Nothing extra shall be paid except the payment of dismantling and laying of new service lines as per conditions of contract.
- 1.16.3** All fossils, coins, articles of value of antiquity, structures and other remains or things of geological or archaeological interest discovered on project location during excavation/construction shall be the property of the Government, and shall be dealt with as per provisions of the relevant legislation. The contractor will take reasonable precaution to prevent his workmen or any other persons from removing and damaging any such article or thing. He will, immediately upon discovery thereof and before removal, acquaint the Engineer-in-charge of such discovery and carry out the official instructions of Engineer-in-charge for dealing with the same, till then all work shall be carried out in a way so as not to disturb/ damage such article or thing.
- 1.16.4** The contractor shall be responsible for the watch and ward / guard of the assets, safety of all fittings and fixtures against pilferage and breakage during the period of installations and thereafter till they are maintained by him and thereafter physically handed over to the client department. No extra payment shall be made on this account.
- 1.16.5** The contractor shall be fully responsible for the safe custody of materials brought by him/ issued to him even though the materials may be under double lock key system.
- 1.17 Rates and other conditions for payment:**
The rates quoted by the Contractor are deemed to be inclusive of the following--
- 1.17.1** Site clearance, setting out work, profile, establishment of reference bench mark(s), taking spot levels, construction of all safety and protection devices, barriers, barricading, signage, labour safety, welfare & training measures, preparatory works, working during monsoon, working at all depths, height, lead, lift and location etc. until / unless specified otherwise, and any other incidental works required to complete this work. Nothing extra shall be payable on this account. Payment for centering& shuttering, however, if required to be done for floor heights greater than 3.50m shall be admissible at rates arrived in accordance with clause 12 of the agreement, if not already specified.
- 1.17.2** Any legal or financial implications resulting out of disposal of earth shall be sole responsibility of the contractor. Nothing extra shall be paid on this account.
- 1.17.3** All labour, material, tools and plants and other inputs involved in the execution of the item.
- 1.17.4** Performance test of the entire installation(s) before the work is finally accepted.
- 1.17.5** Any cement slurry added over base surface (or) for continuation of concreting for better bond is deemed to have been built in the items.
- 1.17.6** The percentage quoted by the tenderer, shall be inclusive of all taxes including GST and levies applicable in respect of this contract payable by the contractor. Government will not entertain any claim whatsoever in respect of the same.
- 1.17.7** For completing the work in time, the Contractor might be required to work in two or more shifts (including night shifts). No claim whatsoever shall be entertained on this

account, notwithstanding the fact that the Contractor may have to pay extra amounts for any reason, to the labourers and other staff engaged directly or indirectly on the work according to the provisions of the labour and other statutory bodies regulations and the agreement entered upon by the Contractor with them.

1.17.8 The Contractor shall keep himself fully informed of all acts and laws of the Central & State Governments, all orders, decrees of statutory bodies, tribunals having any jurisdiction or authority, which in any manner may affect those engaged or employed and anything related to carrying out the work. All the rules & regulations and bye-laws laid down by Collector / MC etc. and any other statutory bodies shall be adhered to, by the contractor, during the execution of work. The Contractor shall also adhere to all traffic restrictions notified by the local authorities. The water charges (for municipal water connection as well as tanker water) shall be borne by the contractor. Also, if the contractor obtains water connection for the drinking purposes from the municipal authorities or any other statutory body, the consequent charges shall be borne by the contractor. All statutory taxes, levies, charges (including GST, water and sewerage charges, charges for temporary service connections and / or any other charges) payable to such authorities for carrying out the work, shall be borne by the Contractor. The Contractor shall arrange to give all notices as required by any statutory / regulatory authority and obtain all requisite licenses wherever required and shall pay to such authority all the fees that are required to be paid for the execution of work. He shall protect and indemnify the Department and its officials & employees against any claim and /or liability arising out of violations of any such laws, ordinances, orders, decrees, by himself or by his employees or his authorized representatives. Nothing extra shall be payable on these accounts. The fee payable to statutory authorities for obtaining the various permanent service connections and Occupancy Certificate for the building shall be borne by the Department.

1.17.9 Royalty at the prevalent rates shall have to be paid by the contractor on all the boulders, stone aggregate, brick aggregate, shingle, coarse or fine sand, earth, gravel, bajri etc. collected by him for the execution of the work, directly to the Revenue Authority or authorized agent of the State Government concerned or Central Government. Nothing extra shall be payable on this account.

Royalty at the prevalent rates shall be paid by the contractor or the RMC supplier as per the terms of supply between them, on all materials such as stone aggregate, coarse or fine sand etc. collected by him for the execution of the work, directly to the revenue authority of the State Government concerned. Further, contractor needs to submit proof of submission of full royalty to the State Government or local authority. Nothing extra shall be payable on this account.

1.17.10 All ancillary and incidental facilities required for execution of work like labour camp, stores, fabrication yard, offices for Contractor, watch and ward, temporary ramp required to be made for working at the basement level, temporary structure for plants and machineries, water storage tanks, installation and consumption charges of temporary electricity, telephone, water etc. required for execution of the work, liaison and pursuing for obtaining various No Objection Certificates, completion certificates from local bodies etc., protection works, barricading, testing facilities / laboratory at site of work, facilities for all field tests and for taking samples etc. during execution or any other activity which is necessary (for execution of work and as directed by Engineer-in-Charge), shall be deemed to be included in rates quoted by the Contractor, for various items in the schedule of quantities. Nothing extra shall be payable on these accounts. Before start of the work, the Contractor shall submit to the Engineer-in-

Charge, a site / construction yard layout, specifying areas for construction, site office, positioning of machinery, material yard, cement and other storage, steel fabrication yard, site laboratory, water tank, etc.

- 1.17.11** The Contractor shall assume all liability, financial or otherwise in connection with this contract and shall protect and indemnify the Department from any and all damages and claims that may arise on any account. The Contractor shall indemnify the Department against all claims in respect of patent rights, royalties, design, trademarks of name or other protected rights, damages to adjacent buildings, roads or members of public, in course of execution of work or any other reasons whatsoever, and shall himself defend all actions arising from such claims and shall indemnify the Department in all respect from such actions, costs and expenses. Nothing extra shall be payable on this account.
- 1.17.12** The Contractor shall make all necessary arrangements for protecting from rain or likewise extreme weather conditions, the work already executed and for carrying out the further work, during monsoon including providing and fixing temporary shelters, protections etc. Nothing extra shall be payable on this account. Also, no claims for hindrance shall be entertained on this account.
- 1.17.13** In case of flooding of site on account of rain or any other cause and any consequent damage, whatsoever, no claim financially or otherwise shall be entertained notwithstanding any other provisions elsewhere in the contract agreement. Also, the Contractor shall make good, at his own cost, the damages caused, if any.
- 1.17.14** No payment shall be made for any damage caused by fire, rain, snowfall, flood or any other natural calamity, whatsoever during the execution of the work. The contractor shall be fully responsible for any damage to the govt. property and the work for which payment has been advanced to him under the contract and he shall make good the same at his risk and cost. The contractor shall be fully responsible for safety and security of his material, T&P/Machinery brought to the site by him. The contractor shall maintain all the work in good condition at his own cost till the completion of the entire work.
- 1.17.15** The ESI and EPF contribution on the part of employer in respect of this contract shall be paid by the contractor. These contributions on the part of employer paid by the contractor shall be reimbursed by the Engineer in charge to the contractor on actual basis.
- 1.18 Foreign Exchange:**
- 1.18.1** No foreign exchange shall be made available by the Department for importing (purchase) of equipment, plants, machinery, materials of any kind or any other items if required to be carried out during execution of the work. No delay and no claim of any kind shall be entertained from the Contractor, on account of variation in the foreign exchange rate.
- 1.18.2** The contractors have to quote the corresponding imported items in “Indian Rupees” in the Schedule of Quantities which shall include all incidental charges including freight, taxes including GST, import duties, fluctuations in currency rates. No extra payment will be made over and above the quoted rates.
- 1.19 Tools & Plant:**
- 1.19.1** No tools and plants including any special T&P etc. shall be supplied by the Department and the Contractor shall have to make his own arrangements at his own cost. No claim of hindrance (or any other claim) shall be entertained on this account.
- 1.20 Computerized MBs & SMBs:**
- 1.20.1** The contractor shall make available computerized Standard Measurement Books (SMBs), as per clause 6 of GCC 2023.
- 1.20.2** The contractor will submit computerized measurement sheet for the work carried out by

him for making payment as per Clause – ‘6’ of the CPWD General Conditions of Contract 2023 (with correction slips up to the last date of submission of tender). For casting of RCC members and other hidden items, the corrected and duly test checked measurement sheets of reinforcement or that of other hidden items shall be deposited with Engineer in charge or his authorized representative, before casting of RCC or other hidden items. The delay in submission of corrected and duly checked measurement sheet may, therefore, delay casting of RCC or execution of hidden item for which no hindrance shall be recorded.

1.21 Water Supply & Sanitary Installations & Testing:

1.21.1 Water tanks, taps, sanitary, water supply and drainage pipes, fittings and accessories should conform to approved manufacturer’s specifications where CPWD Specifications are not applicable. The contractor should get the materials (fixtures/fittings) tested from approved labs, wherever required, at his own cost. The contractor shall submit for the approval of the Engineer-in-Charge, the name of the plumbing agency (along with their working experience in recent past) proposed to be engaged by him.

1.21.2 The contractor shall give performance test of the entire installation(s) as per the standing specifications before the work is finally accepted and nothing extra, whatsoever, shall be payable to the contractor for the test.

2.0 SECRECY

2.1 The contractor shall take all steps necessary that all persons employed on any work in connection with the contract have noticed that the Indian Official Secrets Act 1923 applies to them & will continue so to apply even after the execution of such works under the contract.

2.2 The contract is confidential and must be strictly confined to the contractor’s own use (except so far as confidential disclosure to sub-contractors or suppliers as necessary) and to the purpose of the contract.

2.3 All documents, copies thereof & extracts there from furnished to the contractor shall be returned to the Engineer-in-Charge on the completion of the work / works or the earlier determination of the contract.

3.0 DOCUMENTATION

The Contractor shall render all help and assistance in documenting the total sequences of this project by way of photography, slides, audio / video recording & other records etc. Nothing extra shall be payable to Contractor on this account. However, cost of photographs, slides, audio / video graph etc. shall be borne by the Department. The original films shall be the property of the Department. No copy shall be prepared without the prior approval of the Engineer- in – Charge.

4.0 PROGRESS CHART: -

4.1 The contractor shall submit a Time and Progress Chart for each mile stone. The Engineer-in-charge may within 30 days thereafter, if required modify, and communicate the program approved to the contractor failing which the program submitted by the contractor shall be deemed to be approved by the Engineer-in-charge. The work programme shall include all details of balance drawings and decisions required to complete the contract with specific dates by which these details are required by contractor without causing any delay in execution of the work. The chart shall be prepared in direct relation to the time stated in the Contract documents for completion of items of the works. It shall indicate the forecast of the dates of commencement and completion of various trades of sections of the work and may be amended as necessary by agreement between the Engineer-in-charge and the Contractor within the limitations of time imposed in the Contract documents.

- 4.2 In case of non-submission of construction programme by the contractor, the program approved by the Engineer-in-charge shall be deemed to be final.
- 4.3 The approval by the Engineer-in-charge of such programme shall not relieve the contractor of any of the obligations under the contract.
- 4.4 The contractor shall submit the “Time and Progress Chart and Progress Report” using the mutually agreed software or in other format decided by Engineer-in-charge for the work done during previous month to the Engineer-in-charge on or before 5th day of each month failing which a recovery of Rs. 5000/- shall be made on per week or part basis in case of delay in submission of the monthly progress report.
- 4.5 The program chart should include the following: -
- a) Descriptive note explaining sequence of various activities.
 - b) BAR CHARTS prepared in mutually agreed software or in other format decided by Engineer-in-charge which will indicate resources in financial terms, manpower and specialized equipment for every important stage.

Program for procurement of materials by the contractor.

Program for arranging and deployment of manpower both skilled and unskilled so as to achieve targeted progress.

Program of procurement of machinery / equipment having adequate capacity, commensurate with the quantum of work to be done within the stipulated period, by the contractor. In addition, to the above to achieve the progress of work as per programme, the contractor must bring at site adequate shuttering material required for cement concrete and RCC works etc. The contractor shall submit shuttering schedule adequate to complete the structure work within the laid down physical milestones.

Programme for achieving milestones.

- 4.6 The submission for approval by the Engineer-in-charge of such programme or such particulars shall not relieve the contractor of any of the duties or responsibilities under the contract. This is without prejudice to the right of Engineer-in-charge to take action against the contractor as per terms and conditions of the agreement.

5. PROGRESS AND MONITORING OF WORK:

- 5.1. The progress report shall contain the following, apart from whatever else may be required as specified:

Construction schedule of the various components of the work through a bar chart for every alternate month (or as may be specified), showing the micro milestones, targeted tasks and up to date progress. At least 10 digital photographs showing all the parts of site along with at least 5 minutes video of executions of different items in soft copy has to be submitted in every monthly progress report.

Progress chart of the various components of the work that are planned and achieved, for the month as well as cumulative up to the month, with reason for deviations, if any in a tabular format.

Plant and machinery statement, indicating those deployed in the work.

Man-power statement, indicating individually the names of all the staff deployed on the work, along with their designations. Number of skilled workers and unskilled workers deployed on the work and their location of deployment.

Financial statement, indicating the broad details of all the running account payment received up to date, such as gross value of work done, advances taken, recoveries effected, amount withheld, net payments details of Cheque payment received, extra /substituted /deviations items if any, etc.

- 5.2 For completing the work in time, the Contractor might be required to work in two or more shifts (including night shifts). No claim whatsoever shall be entertained on this account,

notwithstanding the fact that the Contractor may have to pay extra amounts for any reason, to the labourers and other staff engaged directly or indirectly on the work according to the provisions of the labour and other statutory bodies regulations and the agreement entered upon by the Contractor with them.

- 5.3 The work should be planned in a systematic manner so that chase cuttings in the walls, footpath, kerbstone and floors is minimized. Wherever absolutely essential, the chase shall be cut using chase cutting machines. Chases will not be allowed to be cut using hammer / chisel. The electrical boxes should be fixed in walls simultaneously while raising the brick work. The contractor shall ensure proper co-ordination of various disciplines viz. building works, sanitary & water supply & electrical installations etc.
- 5.4 The contractor shall conduct his work, so as not to interfere with or hinder the progress or completion of the work being performed by other contractor(s) or by the Engineer-in-Charge and shall as far as possible arrange his work and shall place and dispose of the materials being used or removed so as not to interfere with the operations of other contractor or he shall arrange his work with that of the others in an acceptable and coordinated manner and shall perform it in proper sequence to the complete satisfaction of Engineer-in-charge.
- 5.5 The Contractor shall do proper sequencing of the various activities by suitably staggering the activities within various pockets in the plot so as to achieve early completion. The agency may deploy adequate equipment, machinery and labour as required for the completion of the entire work within the stipulated period specified. Also ancillary facilities shall be provided commensurate with requirement to complete the entire work within the stipulated period. Nothing extra shall be payable on this account. Adequate number/sets of equipment in working condition, along with adequate stand-by arrangements, shall be deployed during entire construction and maintenance period. It shall be ensured by the Contractor that all the equipment, Tools & Plants, machineries etc. provided by him are maintained in proper working conditions at all times during the progress of the work and till the completion of the work. Further, all the constructional tools, plants, equipment and machineries provided by the Contractor, on site of work or his work shop for this work, shall be exclusively intended for use in this work and they shall not be shifted / removed from site without the permission of the Engineer-in-Charge.
- 5.6 All material shall only be brought at site as per program finalized with the Engineer-in-Charge. Any pre-delivery of the material not required for immediate consumption shall not be accepted and thus not paid for.

6.0 PROJECT REVIEW MEETINGS:

The contractor, immediately on award of work shall submit details of his key personnel to be engaged for the work at site. In addition, he shall furnish the Engineer-in-charge detailed organization involved with the work.

The contractor shall present the programme and status at various review meetings as required.

Monthly Review Meetings: Shall be attended by Project - in - charge and the Management Representative who can take independent decisions along with PWD, client's representatives.

Agenda

- a) Progress Status/Statistics.
- b) Completion Outlook.
- c) Major hold ups/slippages.
- d) Assistance required.

- e) Critical issues.
- f) Any decision on queries raised either by Contractor/PMC.
- g) Anticipated cash flow requirement for next two months.

7. ENGAGING SPECIALISED AGENCIES FOR WORKS

- 7.1** The Specialized agency for the work shall be got approved from the Engineer-in-Charge well before actual commencement of the item of work. The contractor shall submit the list of specialized agencies proposed to be engaged by him along with their technical capability and necessary performance certificates, within 10 days of the stipulated date of start to substantiate technical capability and experience of the agency for prior approval of the Engineer-in-Charge.
- 7.2** It shall be the responsibility of main contractor to sort out any dispute / litigation with the Specialized Agencies without any time & cost overrun to the Department. The main contractor shall be solely responsible for settling any dispute / litigation arising out of his agreement with the Specialized Agencies. The contractor shall ensure that the work shall not suffer on account of litigation/ dispute between him and the specialized agencies / sub-contractor(s). No claim of hindrance in the work shall be entertained from the Contractor on this account. No extension of time shall be granted and no claim what so ever, of any kind, shall be entertained from the Contractor on account of delay attributable to the selection/rejection of the Specialized Agencies.

8.0 SAFETY MEASURES

- 8.1.** The issue of construction safety & standards has gained utmost importance in recent times. This subject is to be dealt with in an integrated manner with an approach to developing and establishing a safety culture at work sites. Broadly, its components are:
 Creating awareness.
 Education.
 Training.
 Implementation.
 Enforcement measures.
 All workers of contractor and associate agencies, invariably and at all the times, must follow all safety norms, adopt safe construction practices and use all required safety gadgets in their working throughout the project duration.
- 8.2.** The contractor shall issue Photo Identity Cards with unique numbers containing salient information of workers for the labour & his staff. All the staff and labour will wear the dress and jackets approved by Engineer-in-charge during work at site.
- 8.3.** The Contractor shall monitor and achieve the objectives of construction safety continuously, progressively and through affirmative action, and shall oversee implementation of safety program over the entire construction period.
- 8.4.** Warning / Caution Boards
 All temporary warning / caution boards / glow signage display such as “Construction Work in Progress”, “Keep Away”, “No Parking”, Diversions & protective Barricades etc. shall be provided and displayed during day time by the Contractor, wherever required and as directed by the Engineer-in-Charge. These glow signage and red lights shall be suitably illuminated during night also. The Contractor shall be solely responsible for damage and accident caused, if any, due to negligence on his part. Also, he shall ensure that no hindrance, as far as possible, is caused to general traffic during execution of the work. These signages shall be dismantled & taken away by the Contractor after the completion of work, only after approval of the Engineer – in –

Charge. Nothing extra shall be payable on this account.

8.5 Sign Boards

- 8.5.1** The Contractor shall provide and erect a display board of size and shape as required and paint over it, in a legible and workman like manner, the details about the salient features of the project, as required by the Engineer-in-Charge. The Contractor shall fabricate and put up a sign board in an approved location and to an approved design indicating name of the project, client / owner, architects, structural consultants, Department etc. besides providing space for names of other Contractors, Associate contractors and specialized agencies. Nothing extra shall be payable on this account.
- 8.5.2** A display board shall be kept at site which would list the names of workers, teams and agencies following safety program in the best manner. This would be updated weekly.
- 8.5.3** Necessary protective and safety equipment's shall be provided to the Site Engineer, Supervisory staff, labour and technical staff of the contractor by the Contractor at his own cost and used at site.
- 8.5.4** The contractor shall make arrangement for Helmets and leather shoes (meant of construction work at sites) for all field staff of the department during the entire period of construction for safety reasons. One helmet and two pairs of shoes per staff member (maximum six members) of the departments per year shall be arranged by the contractor
- 8.5.5** No inflammable materials including P.O.L shall be allowed to be stored in huge quantity at site. Only limited quantity of P.O.L may be allowed to be stored at site subject to the compliance of all rules / instructions issued by the relevant authorities and as per the direction of Engineer-in-Charge in this regard. Also, all precautions and safety measures shall be taken by the Contractor for safe handling of the P.O.L products stored at site. All consequences on account of unsafe handling of P.O.L shall be borne by the Contractor.

9.0 SPECIAL CONDITION

- 9.1** All the materials of approved make will be used in the work with the prior approval of Engineer-in-Charge. However, in case, due to non-availability of material of approved make, the equivalent material may be approved by Engineer-in-charge subject to cost adjustment. If such approved material is cheaper than the model already mentioned in item/approved makes list, the price adjustment will be made based on the difference in market rate. In case, the rate of subsequently approved model is more, no extra payment will be made on this account.”
- 9.2** The following procedure should be followed in case of removal of rejected/sub-standard materials from the site of work.
Whenever any material brought by the contractor to the site of work is rejected, entry thereof should invariably be made in the site order book under the signature of the AE/AEE giving approximate quantity of such materials.
As soon as the material is removed, a certificate to that effect may be recorded by the AE/AEE against the original entry, giving the date of removal, mode of removal i.e. whether by truck, carts or by manual labour. If removal is by truck, the registration number of the truck should be recorded.

10.0 INSPECTION OF WORKS

- 10.1** In addition to the provisions of relevant clauses of the contract, the work shall also be open to inspection by the Chief Engineer, North Zone (M), PWD and other senior officers of PWD/CPWD in addition of the Engineer-in-charge, his authorized representatives, Authorities and Team of Third-Party Quality Assurance, if engaged for the work. The

contractor shall at times during the usual working hours and at all times at which reasonable notices of the intention of the Engineer-in-charge or other officers as stated above to visit the works shall have been given to the contractor, either himself be present to receive the orders and instructions or have a responsible representative duly accredited in writing, to be present for that purpose.

10.2 The committee/consultant appointed by PWD/CPWD, shall be inspecting the works including workshops and fabrication factory to ensure that the works in general being executed according to the design, drawings and specifications laid down in the contract. Their observations shall be communicated by PWD/CPWD engineering staff and compliance is to be reported to PWD/CPWD.

10.3 Senior Officers of PWD/CPWD, Dignitaries from Central Ministry / Department, State Government and Client Department Authorities shall be inspecting the on-going work at site at any time with or without prior intimation. The contractor shall, therefore, keep updated the following requirements and detailing-

- Display Board showing detail of work, weekly progress achieved with respect to targets, reason of shortfall, status of manpower, wages being paid for different categories of workers.
- Entrance and area surrounding to be kept cleaned.
- Display layout plan key plan, relevant drawings including plans, elevations and sections.
- Upto date display of programme chart (Bar charts).
- Keep details of quantities executed, balance quantities, deviations, possible Extra item, substituted Item etc.
- Keep plastic / cloth mounted one sets of relevant drawings.
- Set of Helmets and safety shoes for safety.

11.0 Applicable Permits

11.1 The contractor(s) shall give to the Municipality, police and other authorities all necessary notices etc. that may be required by law and obtain all requisite licenses for temporary obstructions, enclosures etc. and pay all fee, taxes including GST and charges which may be levied on account of these operations in executing the contract. He shall make good any damage to the adjoining property whether public or private and shall supply and maintain lights either for illumination or for cautioning the public at night.

11.2 The contractor shall ensure that applicable permits mandated by the local bodies and in case warranted for this work are obtained as required under the Applicable Laws.

12.0 LOCAL BYE-LAWS

12.1 The building work shall be carried out in the manner complying in all respects with the requirements of relevant bye-laws of the local body under the jurisdiction of which the work is to be executed or as directed by the Engineer-in-Charge and nothing extra shall be paid on this account.

12.2 Some restrictions may be imposed by the local police etc. on the working time and for movement of labour, materials etc. the contractor shall be bound to follow all such restrictions/instructions and nothing extra shall be payable on this account.

12.3 The contractor shall not stack building material/ malba on the road or on the land owned by any other authority, as the case may be. In case, the Contractor is found stacking the building material/ malba as stated above, he shall be liable to pay the stacking charges as may be levied by local body or authority and also to face penal action as per the rules, regulations and bye-laws of the said body or authority. The Engineer-in-Charge shall be

at liberty to recover the sums due but not paid to the concerned authorities on the above counts from any sums due to the contractor including amount of the Security Deposit or Retention Money in respect of this contract or any other contract.

13.0 FINAL TESTING OF THE INSTALLATION:

The Contractor shall demonstrate trouble free functioning of all the Civil and E & M installations and services. The Engineer-in-Charge or his authorized representatives shall carry out final inspection of the various Civil and E & M services and installations. Any defect(s) noticed during demonstration shall be rectified by the Contractor at his own cost to the entire satisfaction of the Engineer-in-Charge. Nothing extra shall be payable on this account.

14.0 De-watering

- (i) De-watering required, if any, shall be done conforming to BIS Code IS: 9759 (guide lines for de-watering during construction) and / or as per the specifications approved by the Engineer-in-Charge. Design of an appropriate and suitable dewatering system shall be the Contractor's responsibility. Such scheme shall be modified / augmented as the work proceeds based on fresh information discovered during the progress of work, at no extra cost. At all times during the construction work, efficient drainage of the site shall be carried out by the Contractor and especially during the laying of plain cement concrete, taking levels etc. The Contractor shall also ensure that there is no danger to the nearby properties and installations on account of such lowering of water table. If needed, suitable precautionary measures shall be taken by the Contractor. Also the scheme of dewatering adopted shall have adequate built in arrangement to serve as stand-bye to attend to repair of pumps etc. and disruption of power / fuel supply. Nothing extra shall be payable for all the operations described in this para.
- (ii) In trenches where surface water is likely to get into cut / trench during monsoons, a ring bund of puddle clay or by any other means shall be formed outside, to the required height, and maintained by the Contractor. Also, suitable steps shall be taken by the Contractor to prevent back flow of pumped water into the trench. Nothing extra shall be payable on this account.

For works below ground level, the contractor shall keep that area free from water. If dewatering or bailing out of water is required, the contractor shall do the same at his own cost and nothing extra shall be paid except otherwise provided in the items of Schedule of Quantities.

The Contractor shall make all necessary arrangements for protecting from rains, fog or likewise extreme weather conditions, the work already executed and for carrying out further work, during monsoon including providing and fixing temporary shelters, protections etc. Nothing extra shall be payable on this account and also no claims for hindrance shall be entertained on this account.

In case of flooding of site on account of rain or any other cause and any consequent damage, whatsoever, no claim financially or otherwise shall be entertained notwithstanding any other provisions elsewhere in the contract agreement. Also, the Contractor shall make good, at his own cost, the damages caused, if any.

The contractor will take reasonable precautions to prevent his workman and employees from removing and damaging any flora (plant/vegetation) from the project area.

15.0 ROAD AND SPACE FOR LABOUR CAMPS

The contractor shall arrange land, if required, for accommodation of labour, setting up of

office, the storage of materials, erection of temporary workshops, construction of approach roads to the site of the work including land required for carrying out of all jobs connected with the execution & completion of the work. If during construction, it becomes necessary to remove or shift the stored materials shed workshop, access roads, etc, to facilitate execution of any other work by any other agency, the contractor shall carry out the removal of shifting as directed by the Engineer-in-Charge and no claim whatsoever, shall be entertained on this account.

The site shall be handed over on as is where is basis and it shall be deemed that the contractor has satisfied himself as to the nature and location of the work, transport facilities, availability of land for setting up of camp, etc. the department will bear no responsibility for lack of such knowledge & the consequences thereof.

16.0 Removing of parked vehicles and other objects for execution of work:

This work is to be executed on PWD roads. For timely execution of work, the agency may be required to deploy necessary Cranes / tools& plants/machineries etc. to remove the parked vehicles or any other object, which are hindering the execution of this work, from Right of Way of PWD road, on as many occasions as required and as directed by Engineer-in-Charge, at his own cost and nothing extra will be payable for the same to the agency.

ADDITIONAL CONDITIONS

1. Before tendering, the tenderer shall inspect the site of work and shall fully acquaint about the conditions with regard to site, nature of soil, availability of materials suitable location for construction of godowns, stores and labour huts, the extend of leads and lifts involved in the work (over the entire duration of the contract) including local conditions, traffic restrictions, obstructions and other conditions, as required for satisfactory execution of the work. His rates should take into consideration all such factors and contingencies. No claim whatsoever shall be entertained by the Department on this account.
2. The contractor must study the specifications & conditions carefully before tendering.
3. Before start of the work, the contractor shall submit the program of execution of work, get it approved from the Engineer-in-Charge and strictly adhere the same for the timely completion of the project work.
4. The contractor shall have to make approaches to the site, if so required and keep them in good condition for transportation of labour and materials as well as inspection of works by the Engineer-in- Charge. Nothing extra shall be paid on this account.
5. The contractor shall at all times carryout work on the Busy Road sites in a manner creating minimum hindrances in the flow of traffic as per direction of Engineer-in-Charge.
6. All arrangements for traffic diversion during construction including maintenance of diversion roads shall be considered as incidental to the work and contractor's responsibility and nothing shall be payable to him in this respect. However, if any new diversion road is constructed by the contractor, the same will be paid separately.
7. Any damage done by the contractor to any existing work shall be made good by him at his own cost.
8. The work shall be carried out in the manner complying with the requirement of relevant bye-laws of the local bodies under the jurisdiction of which the work is to be executed and nothing extra shall be paid in all respects on this account.
9. The contractor shall make his own arrangements for obtaining electric connection(s), if required, and make necessary payment directly to the Department concerned. The Department will however make all reasonable recommendations to the authority concerned in this regard.
10. The contractor or his authorised representative should always be available at the site of work to take instructions from Departmental Officers, and ensure proper execution of work. No work should be done in the absence of such authorised representative.
11. The structural and other drawings for the work, shall at all times, be properly correlated before executing any work and no claim whatsoever shall be entertained in this respect.
12. The contractor shall maintain in good condition all works executed till the completion of entire work allotted to the contractor.
13. No payment will be made to the contractor for damaged caused by rains, or other natural calamities during the execution of works and no such claims on this account will be entertained.
14. Royalty at the prevalent rates and all other incidental expenditure shall have to be paid by the contractor on all the boulders, metal, shingle, earth, sand, bajri etc. collected by him for the execution of the work directly to the concerned Revenue Authority of the State or Central Government. His rates are deemed to include all such expenditure and nothing extra shall be paid.
15. The contractor shall take all necessary measures for the safety of traffic during construction and provide, erect and maintain such barricades, including signages, markings, flags, lights and flagman, as necessary at either end of the excavation embankment and at such intermediate points as directed by the Engineer-in-Charge for the proper identification of construction area. He shall be responsible for all damages and accidents caused due to negligence on his part.
16. The contractor shall provide suitable barricading with suitably painted single row of GI sheets about 3'-0" wide (90cms) nailed or bolted with wooden poles spaced 2 to 3 metre apart and each pole 1.6m to 2m long, 8cm to 10cm dia. The poles will be embedded in mobile iron pedestal/ rings suitably framed for giving stable support without hindering the traffic as per direction of the Engineer-in- Charge. All management (including

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

watch and ward) of barricades shall be the full responsibility of the contractor. The barricades shall be removed only after the completion of the work or part of work.

17. The temporary warning lamps shall be installed at all barricades during the hours of darkness and kept lit at all times during these hours.
18. All works and materials brought and left upon the ground by the contractor or by his orders for the purpose of forming part of the works are to be considered to be the property of the President of India and the same are not to be removed or taken away by the contractor or any other person without special license and consent in writing of the Engineer-in-Charge, but the President of India is not be in any way responsible for any loss or damage which may happen to or in respect of any such work or materials either by the same being lost or damaged by weather or otherwise.
19. The contractor will be responsible to provide safe drinking water to labour engaged in execution of work.
20. The rates for all items of work, unless clearly specified otherwise, shall include the cost of all labour, materials de-watering and other inputs involved in the execution of the items.
21. The materials to be issued to the contractor and the place of delivered shall be as mentioned elsewhere in the tender documents. If these are delivered at any other site, the difference in cost due to cartage will be adjusted accordingly. The contractor shall have to cart at his cost the materials to the site of work as soon as these are issued. The materials will be issued during the working hours and as per rules of the Central Stores of CPWD or the store of the PWD (GNCTD) from time to time.
22. The contractor shall construct suitable godown at site of work for storing the materials safe against damage due to sun, rain, dampness, fire, theft etc. He shall also employ necessary watch and ward establishment for the purpose and no extra claim whatsoever shall be entertained on this account.
23. **In the tender papers the works “CPWD” shall include PWD (GNCTD) where applicable.**
24. Existing drains, pipes, cables, overhead wires, sewer lines, waterline and similar servicemen countered in the course of the execution of the work shall be protected against the damage by the contractor. The contractor shall not store materials or otherwise occupy any part of the site in a manner likely to hinder the operation of such services
25. The contractor will not have any claim in case of any delay by the Engineer-in-Charge in removal of trees or shifting, removing of telegraph, telephone or electric lines (overhead or underground), water and sewer lines and other structure etc. if any, which may come in the way of the work. However, suitable extension of time can be granted to cover such delays.
26. Contractor may be required to execute this work under foul position. The decision of the Engineer- in-charge whether the position is foul or not shall be final and the binding on the contractor and nothing extra for executing the work in foul position is payable, beyond what is provided in the schedule of quantities.
27. For completing the work in time, the contractor might be required to work in two or more shifts, including night shift and no claims whatsoever shall be entertained on this account, notwithstanding the fact that the contractor will have to pay to the labourers and other staff engaged directly or indirectly on the work according to provisions of labour regulation and the agreement entered upon and / or extra amount for any other reasons.
28. The rates for all the items of the of work unless otherwise specified shall include cost of all labour, materials, de watering and removal of silt, mud, vegetation etc. and other inputs required for the execution of the work. Only the material stated in the schedule of quantities and in schedule “B” shall be issued by the department. In case any material supplied free of cost by the department is lost/damaged after issue while in transit or from the custody of the contractor recovery shall be made at the current replacement cost of the material plus ten percent.
29. Unless otherwise specified the rates are applicable for all heights depths, lead & lifts involved and the execution of work in or under water and or liquid mud including making diversion channels if necessary.
30. No claim for the idle labour, machinery and establishment on account of suspension/stoppage of work for any reason whatsoever shall be admissible under any circumstances.

31. The contractor shall take all precautions to avoid accident by exhibiting necessary caution boards by providing red flags, red lights & barriers. The contractor shall be responsible for any accident at the site of work and consequences thereof.
32. The work shall be carried out in such a manner so as not to adversely effect or disturb other works being executed by other agencies near the site of work.
33. The site shall be cleared & all the surplus and unserviceable material shall be disposed off as directed by the Engineer-in-Charge.
34. Stipulated material shall be issued for use at site on works, all the items where such materials are required. For factory made product like pre-cast cement tiles, pre-cast hollow concrete blocks, pre-cast foam concrete blocks, pre-cast RCC pipes etc. stipulated material shall not be issued.
35. The work of approach road in the entire stretch shall be completed to safe level in one working season if it lies in the Khadir width of river.
36. The work shall be carried out in such a manner so as not to interfere or effect or disturb other works being executed by other agency if any.
37. The Malba/garbage, removed from the site shall be disposed off by the contractor at any Suitable places as directed by Engineer-in-charge.
38. The contractor shall have to mention the detail of Hot Mix Plant from where he intends to bring the bituminous mix. The plant including all material to used in the bituminous mix shall be open to inspection by Engineer-in-charge or his authorised representative, wherever required.
39. **Permission coordination and liaising of many Government Department like Delhi Traffic Police, DJB etc. will be obtained by the contractor himself and for this nothing shall be paid extra.**
40. **Incidental charges for taking permission from traffic police/penalty imposed by traffic police for violations of traffic rules by police local bodies etc. shall be borne by the contractor.**
41. **The contractor shall dispose off the malba at nearby dumping ground which includes all leads and lifts no dumping ground shall be provided / arranged by the department.**
42. The dismantle material/building rubbish received from dismantling/demolishing shall be dumped to the dumping ground in properly covered truck with precaution. Agency shall submit the hard copy of photograph showing the properly covered truck with precaution. Agency shall submit the hard copy of photograph showing the properly covered truck disposing the dismantles material/building rubbish. Failure of which shall be sternly dealt and a penalty @ Rs. 500/- per trip of truck shall be levied and the decision of Engineer-in-charge shall be final & binding.
43. Agency/contractor shall not dump the construction material on the metalled road and shall keep the construction material on the physically demarcated space by the Engineer-in-charge.
44. All the building material responsible for pollution shall be brought at site from sources covered by tarpaulin and shall take all precautionary measure to ensure that no dust particles are permitted to pollute the air quality, failure of which agency shall be liable to pay damages as decided by Engineer- in-charge.
45. All the trucks or vehicle of any kind, which are used for construction purpose and/or are carrying construction materials like cement, sand and other allied material shall be fully covered in the process of transporting the material.
46. There shall be no burning of leaves, plastic etc. at construction site.
47. The agency should ensure that at least minimum wages rates are paid to the workers. In this regard, following procedure to be adopted.
 - (a) Wages due to every worker shall be paid to him direct **by contractor through Bank or ECS or Online transfer to his Bank Account.**
 - (b) It shall be the duty of the contractor to ensure the disbursement of **wages through bank account of labour.**

- (c) The contractor shall obtain from the Junior Engineer or any other authorized representative of the Engineer-in-Charge as the case may be, a certificate under his signature at the end of the entries in the "Register of Wages" or the "Wage-cum-Muster Roll" as the case may be in the following form:-

"Certified that the amount shown in column No.....Has been paid to the workman concerned **through bank account of labour** on at....."

48. No contractor /Builder or any person would be permitted to store /dump construction material or debris on metalled road. All precautionstobetakentoensurethatnodustparticlesarepermittedtopollute the air quality as a result of such storage.
49. It is necessary that the contractor may keep a record of procurement of materials required in this work. It will be sole responsibility of the contractor to produce the same to any agency, if asked for at any stage.
50. The work will be supervised by the staff of the department. However, the contractor will be sole responsible for its quality. If any stage, during execution or after execution, it is found that the material used, was not as per specifications or the quality proves to be substandard, the contractor will be liable to be prosecuted.
51. The concretization shall not be allowed up to 1 meter around existing tree on work site. No measurement shall be done for payment for concrete within 1 meter around tree and rectification shall be done at the risk and cost of contractor. ThecontractorshallbepenalizedforRs.1,000/-for violation of each case. The contractor shall also take all precautionary measures to avoid any damage to existing trees and plants. All necessary arrangement shall be made by the contractor. No extra payment shall be made to contractor on this account.
52. Wherever because of width of the road/footpath/divider/drain etc. It is not possible to leave area of 1 meter around the trees then the space shall be left to lesser dimensions commensurate with the space available, but it shall be ensured that the trees have sufficient area for receiving the water and air to its roots. Any deviation from the dimension of 1 meter shall be made only after approval of Engineer-in- charge.

PARTICULAR SPECIFICATION

1.0 GENERAL

- 1.1 The work, in general shall be executed as per the description of item, approved design and drawings, particular specifications & special conditions attached, MORTH specifications for road and bridge works (Fifth revision) 2013, CPWD specifications 2019 Vol.-I & II with correction slips upto the date of the opening of Tender and relevant specifications of B.I.S. with correction slips issued upto the last date of issue of tender. Where the aforesaid provisions and conditions are silent, relevant specialized literature and manufacturers' specifications shall be followed for the execution of work.
- 1.2 In case of discrepancy between the schedule of quantities, the specifications and/or the drawings; the following order of precedence will be followed: -
- (i) Description of items in Schedule of Quantities
 - (ii) Particular specifications and special conditions.
 - (iii) Drawings.
 - (iv) MORTH specifications for Road & Bridge work (Fifth Revision) 2013 with correction slips issued upto the last date of issue of tender.
 - (v) IRC specification/Codes.
 - (vi) CPWD specifications 2019 Vol.-I & II with correction slips upto the date of the opening of Tender.
 - (vii) Relevant Specifications of B.I.S.
- 1.3 The contractor shall, at his own cost, construct, equip and establish a testing laboratory at site with necessary apparatus, instrument and equipment such as weighing scale, graduated cylinder, standard sieves, thermometer, Slump Cones etc. and engage the experienced technical staff for conducting day to day tests and to ensure that material conforming to prescribed standard only are used in the work. The Engineer-in-Charge reserves right to conduct field tests to ensure that the quality is consistent with the prescribed specifications. If any material of end product is found defective or substandard, the same will have to be replaced/redone at the cost of contractor.
- 1.4 The necessary tests shall be conducted in the laboratory of Central Road Research Institute, IIT Delhi, JMI Delhi, NIT Delhi, any Government Engineering College are allowed by Engineer-in-Charge without prior approval of any higher authority /officer provided these labs have all necessary facility to carry out the required tests, or any other laboratory approved by the Engineer-in-charge. The sample for carrying out all or any of the tests shall be collected by the Engineer-in-charge or on the behalf of the Officer-in-charge of the quality control wing of Central Design Office, CPWD and his authorised subordinate or by the officer-in-charge, PWD (GNCTD) laboratory and his authorised subordinate for carrying out the independent quality control tests and the results will be binding on the contractor. **All expenditure to be incurred for testing of samples e.g. packing sealing transportation, loading, unloading etc including testing charges for all materials etc shall be borne by the contractor, irrespective of the norms of test results.**
- 1.5 The contractor or his authorised representative shall associate in collection, preparation, forwarding and testing of such samples. In case he or his authorized representative is not present or does not associate him, the result of such tests and consequences there up on shall be binding on the contractor.
- 1.6 The work shall be executed mechanically unless otherwise directed by Engineer-in-Charge. Following major machinery is to be arranged by the contractor :-
- (a) J.C.B., Pock lain and dumpers for excavation and disposal of excavated earth and road materials.
 - (b) Concrete Pump for placing the concrete.
- 1.7 All dismantled unserviceable material unless otherwise stated shall be the property and liability of the contractor who will take it away from the site of work and quote his rate accordingly. The decision regarding un-serviceability of material will rest with Engineer-in-Charge.
- 1.8 All dismantled/excavated serviceable material shall be the property of Govt. which shall have to be handed over to the Engineer-in-Charge by the contractor and proper account shall be maintained.
- 1.9 Material such as cement, fine sand, aggregates, bricks for execution shall be as per CPWD Specification relevant agreement items.

CONDITION FOR RMC AND DESIGN MIX CONCRETE

1. **C.C. Work (Design mix concrete):-**The CC work shall be done with Design Mix Concrete unless otherwise specified. In the nomenclature of items wherever letter M has been indicated, the same shall imply for the Design Mix Concrete. For the nominal mix is CC, CPWD Specifications shall be followed. The Design Mix Concrete will be designated based on the principles given in IS: 456, 2000. The Contractor shall submit design mixes for each class of concrete indicating that the concrete ingredients and proportions will result in concrete mix meeting requirements specified. In case of use of admixture and or white cement, the mix shall be designed with these ingredients as well.

The first concrete mix design / laboratory tests, with admixture (if to be used by contractor at his own cost) and without admixture will be carried out by the contractor through approved laboratory **mentioned in the List**.

The various ingredients for mix design / laboratory tests shall be sent to the lab / test houses through the Engineer-in-charge and the samples of such aggregates sent shall be preserved at site by the contractor in supervision of department.

The contractor shall submit the report on design mix from any of approved laboratories for approval of Engineer-in-Charge within 30 days from the date of issue of letter of acceptance of the tender. No concreting shall be done until the design mix is approved. In case of white Portland cement and the likely use of admixtures where CC / RCC is done with concrete pumps in concrete with ordinary Portland / White Portland cement, the contractor shall design and test the concrete mix by using trial mixes with white cement and / or admixtures also, for which nothing extra shall be payable.

In case of change of source or characteristic properties of the ingredients used in the concrete mix during the work, a revised laboratory mix design report conducted at laboratory established at site shall be submitted by the contractor as per the direction of the Engineer-in-charge.

- 1.1 **Approval of design mix:-**It shall be in accordance with CPWD specification 2019 Vol. 1 to II shall be followed with upto date correction clips.

The design mix/job mix shall be got designed by the contractor only from the institute/laboratory as per the List-A attached and its cost shall be borne by the contractor.

All other operations in concreting work like Mixing, Slump transportation, laying / placing of concrete, compaction, curing sampling, etc. and tests not mentioned in this particular specification for Design Mix of Concrete shall be as per CPWD specifications 2019.

- 1.2 **Production of Concrete**

All concrete may be produced from fully computerised weigh-batching plant of suitable capacity conforming to IS:4925 with the arrangements for automatic dispensing of admixture and having facility of giving print out indicating weight / details of all ingredient of concrete in each lot/ batch and variations from the approved design mix if any.

Contractor may procure concrete from approved RMC plants or he may establish his own plant at site. Requisite approval and NOC including environmental clearance for establishing plant shall be obtained by contractor. Land/space for establish plant shall also be arranged by contractor. Nothing extra shall be paid on this account.

The batching and mixing plant shall be fully automatic of suitable capacity not less than 30cum./hour. Automatic batcher shall be charged by devices which when

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

actuated by a single starter switch will automatically start the weighing operation of each material and stop automatically when the designated weight of each material is fed in the mixer. The batching plant shall have automatic arrangement for dispensing the admixture and shall be capable of discharging water in more than one stage. A batching plant essentially shall consist of the following components:

- Separate storage bins for different sizes of aggregates, silo for cement and flyash; water storage tank.
- Batching equipment
- Mixers
- Control Panels
- Mechanical material feeding and elevating arrangements

The compartments of storage bins for aggregates shall be approximately of equal size. The cement compartment shall be centrally located in the batching plant. It shall be water tight and provided with necessary air vent, aeration fittings for proper flow of cement & emergency cut off gate. The aggregate and sand shall be charged by power operated centrally revolving chute. The entire plant from mixer floor upward shall be enclosed and insulated. The batch bins shall be constructed so as to be self cleansing during draw-down. The batch bins shall in general conform to the requirements of IS:4925.

The batching equipment shall be capable of determining and controlling the prescribed amounts of various constituent materials for concrete accurately i.e. water, cement, sand, individual size of coarse aggregates etc. The accuracy of measuring devices shall fall within the following limits.

Measurement of Cement:	$\pm 2\%$ of the quantity of cement in each batch
Measurement of Water:	$\pm 3\%$ of the quantity of water in each batch
Measurement of Aggregate:	$\pm 3\%$ of the quantity of aggregate in each batch
Measurement of Admixture:	$\pm 3\%$ of the quantity of admixture in each batch

The batching and mixing plant shall have the provision of adjusting the plus / minus quantity of various ingredients in the next batch so that there is no variation in quantity of ingredients from design mix in a lot consisting of 5 to 6 batches.

The mixer in the batching plant shall be so arranged that mixing action in the mixer can be observed from the operator's station. The mixer shall be equipped with a mechanically or electrically operated timing, signalling and metering device which will indicate and assure completion of the required mixing period. The mixer shall have all other components as specified in IS: 4925.

1.2.1 Transportation, Placing and Compaction of Concrete

Mixed concrete from the RMC / Batching plant shall be transported to the point of placement by transit mixers and placed in position through concrete pumps and/or steel closed bottom buckets capable of carrying minimum 0.6 cum concrete. In case the concrete is proposed to be transported by transit mixer, the mixing speed shall not be less than 4 rev/min. of the drum nor greater than a speed resulting in a peripheral velocity of the drum 70 m/minutes at its largest diameter. The

agitating speed of the agitator shall be not less than 2 rev/min nor more than 6 rev/min of the drum. The number of revolution of the mixing drum or blades at mixing speed shall be between 70 to 100 revolutions for a uniform mix, after all ingredients, have been charged into the drum. Unless tempering water is added, all rotation after 100 revolutions shall be at agitating speed of 2 to 6 rev/min and the number of such rotations shall not exceed 250. The general construction of transit mixer and other requirement shall conform to IS:5892.

In case concrete is to be transported by pumping, the conduit shall be primed by pumping a batch of mortar through the line to lubricate it. Once the pumping is started, it shall not be interrupted (if at all possible) as concrete standing idle in the line is liable to cause a plug. The operator shall ensure that some concrete is always there in the pump receiving hopper during operation. The lines shall always be maintained clean and shall be free of dents at all stages. Special precaution shall be taken that surrounding temperature during concreting shall not exceed 30 degree centigrade

Except where otherwise agreed to by the Engineer-in-Charge, concrete shall be deposited in horizontal layers to a compacted depth of not more than 450 mm. Unless agreed to by the Engineer-in-Charge, concrete shall not be dropped into place from a height exceeding 1.5m. In order to avoid such situations chutes, tremie pipe or closed bottom buckets shall be used. These shall be kept clean and used in such a way as to avoid segregation. Slope of the chute shall be so adjusted that concrete flows without the use of excessive quantity of water. The delivery end of chute shall be as close as possible to the point of deposit. the chute shall be thoroughly flushed with water before and after each working period and the water used for this purpose shall be discharged outside the formwork. The concrete shall be compacted by using immersion type vibrators. When the concrete is being continuously deposited to a uniform depth along a member, vibrator shall not be operated within one meter of free end of the advancing concrete. Every effort shall be made to keep the surface of the previously placed layer of concrete alive so that the succeeding layer can be amalgamated with it by the vibration process. In case the concrete in underlying layer has hardened to such an extent that it cannot be penetrated by the vibrator but is still fresh (that is, just after initial set), un-imposed bond shall be achieved between the top and underlying layer by first scarifying the lower layer before the new concrete is placed by systematically and thoroughly vibrating the new concrete. The points of insertion of vibrator in the concrete shall be so spaced that the range of action overlap to some extent and the freshly filled concrete is sufficiently consolidated at all locations. The spacing between the dipping positions of vibrator shall be maintained uniformly throughout the surface of concrete so that concrete is uniformly vibrated. The vibrating head shall be regularly and uniformly inserted in the concrete so that it penetrates of its own accord and shall be withdrawn slowly whilst running so as to allow redistribution of concrete in its way and allow the concrete to flow back into the hole behind the vibrator. The vibrator head shall be kept in one position till the concrete within its influence is completely consolidated. Vibration shall be continued until the coarse aggregate particle have blended into the surface but have not disappeared. The contractor shall keep at least one additional vibrator in serviceable condition to be used in the event of breakdowns and maintenance problems.

The vibrator head shall not be brought more than 200 mm near to the formwork as this may cause formation of water stagnations. The formwork shall be strong and great care shall be exercised in its assembly. It shall be designed to take up increased pressure of concrete and pressure variations caused in the

neighbourhood of vibrating head, which may result in excessive local stress on the formwork. The joints of the formwork shall be made and maintained tight and close enough to prevent the squeezing out slurry or sucking in of air during vibration. The formwork to receive concrete shall be cleaned and made free from standing water, dust, etc. The contractor shall keep provision for screed and shutter vibrators at site.

No concrete shall be placed in any part of the structure until the approval of Engineer-in-Charge has been obtained. If concreting is not started within 24 hours of the approval being given, it shall have to be obtained again from the Engineer-in-Charge. Concreting shall be done continuously over the area between construction joints. Fresh concrete shall not be placed against concrete which has been in position for more than 30 minutes unless a proper construction joint is formed. When concreting has to be resumed on a surface which has hardened, it shall be roughened, swept, clean, thoroughly wetted and covered with a 13 mm thick layer of mortar composed of cement and sand in the same ratio as in the concrete mix itself. The 13 mm layer of mortar shall be freshly mixed and placed immediately before placing of new concrete.

Where concrete is not fully hardened, all latency shall be removed by scrubbing the wet surface with wire or bristle brushes. Care shall be taken to avoid dislodgement of particles of coarse aggregate. The surface shall then be thoroughly wetted, all free water removed and then coated with neat cement grout. Particular attention shall be given to corners and close spots.

1.2.2 Surface Finish

The exposed surface of concrete of all grades shall be shutter finished except where form liner is used. Concrete with surface defects larger than 1/6th of the cover shall be rejected. Any special surface finish such as form liner finish of outer surface of crash barrier, shall be as per approved drawing or as directed by the Engineer-in-Charge. The quoted rates shall deemed to have included such elements and nothing extra shall be payable on this account.

All members above ground or formation level shall have shutter finished surfaces. No tie bolt shall be permitted in piers. Cast-in-situ superstructure shall be casted in single pour between the expansion joints. Utmost care shall be taken by the contractor in erection of formwork for components cast in stages if any. Location of construction joints in between such stages shall be pre-decided and all such joints shall be treated in a manner approved by the Engineer-in-charge so as to match with the surrounding concrete without leaving any visual aberration or bad patches and/or bands. The contractor shall be deemed to have included the cost of such operation in his quoted rates and no claim whatsoever shall be entertained at a later date.

The form finished concrete surfaces shall be free from honeycomb, blemishes, holes, surface defects, surface undulation etc. In no case such defects shall exceed 200 mm in any direction for individual spots or the continued area of such defects shall not exceed 0.2% of the entire area of related surface. Any variation beyond this limit shall be considered as a substandard work and shall be liable for rejection. The Engineer-in-Charge shall have the option to accept the so formed concrete at a reduced rate for defects exceeding this limit provided it is structurally adequate and due matching of defective patches is done by the contractor to the entire satisfaction of the Engineer-in-Charge.

Special care shall be taken to ensure that no stains are left on the formed concrete either from formwork or exposed reinforcement bars. Such stains shall be removed by the contractor at no extra cost so as to match with adjoining concrete surfaces to the satisfaction of the Engineer-in-Charge.

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

1.2.3 Curing of Concrete

Curing of concrete shall be complete and continuous using water that is free of harmful amounts of deleterious materials that may attack, stain or discolour the concrete.

Immediately after compaction and completion of any surface finishes, the concrete shall be protected from evaporation of moisture by means of polyethylene sheets, wet hessian or other material kept soaked by spraying. As soon as the concrete has attained a degree of hardening sufficient to withstand surface damage, moist curing shall be implemented and maintained for a period of at least 14 days after casting.

Method of curing and their duration shall be such that the concrete will have satisfactory durability and strength and members will suffer a minimum distortion, be free from excessive efflorescence and will not cause undue cracking in the works by its shrinkage.

The top surface of the slabs and other horizontal surfaces shall be cured by impounding water in cement mortar bunds. Steeply sloping and vertical formed surfaces shall be kept completely and continuously moist prior to and during the striking of formwork by applying water to the top surfaces and allowing it to pass down between the formwork and the concrete. After removal of form, moist curing to be done by wrapping hessian cloth, etc. and keeping it moist by suitable means. Approved non-wax base curing compounds can be applied on vertical and inclined surfaces, after 7 days of moist curing, where permitted by the Engineer-in-Charge at no extra cost. However it is required to be proved that using curing compound the concrete shall not have less strength than concrete cured by water curing. It shall not leave any discolouration on the structural concrete. Such approved compounds shall be applied to all exposed surfaces of the concrete.

Steam curing with approved methodology can be adopted if required, for precast segments. No additional payment will be made for adopting steam curing.

1.2.4 Concreting of Narrow Members

Wherever the concreting of narrow member as in case of piers/ column (as adjudged by Engineer-in-Charge) is required to be carried out within shutters of considerable depth, temporary openings in the sides of the shutters shall, if so desired by the Engineer-in-charge, be provided to facilitate the pouring and consolidating of concrete. Before any concreting is commenced, shutters and centering shall be carefully examined and the space to be occupied by the concrete be thoroughly cleaned out. The concrete in such members shall be compacted with suitable shutter vibrators as appropriate.

1.2.5 PROTECTION OF CONCRETE BELOW GROUND LEVEL

Concrete placed below the ground shall be protected from falling earth during and after placing. Concrete placed in ground containing deleterious substances shall be kept free from contact with such ground and with water draining there from during placing and for a period of seven days or as otherwise instructed thereafter. Approved means shall be taken to protect immature concrete from damage by debris, excessive loading, abrasion, vibrations, deleterious ground water, mixing with earth or other materials, and other influences that may impair the strength and durability of the concrete.

1.2.6 CONSTRUCTION JOINTS

Before the concrete is fully hardened, all latency shall be removed by scrubbing the wet surface with wire or bristle brushes. Care shall be taken to avoid

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

dislodgement of particles of coarse aggregate. The surface shall then be thoroughly wetted, all free water removed and then coated with neat cement grout. Particular attention shall be given to corners and close spots.

Construction joints in all concrete work shall be made as directed by the Engineer-in-Charge. Where vertical joints are required, these shall be shuttered as directed and not allowed to take the natural slope of the concrete. Before fresh concrete is placed against a vertical joint, the old concrete shall be chipped, cleaned and moistened.

When a horizontal construction joint is formed, provision shall be made for interlocking with the succeeding layer by the embedment of saturated wooden blocks or wooden strips beveled on four sides to facilitate their removal. Prior to the next pour the wooden pieces shall be loosened and removed in such a manner as to avoid injury to the concrete. After about 8 to 12 hours of concreting, contact surface shall be hacked to expose the aggregate surface and remove laitance. Immediately thereafter clean the surface using compressed air to remove all the dirt. The surface shall then be compressed cleaned to remove all dirt. Before applying fresh concrete, the contact surface shall be wetted for at least 6 hours. After the surface has dried, a coat of cement slurry shall be applied uniformly using a brush over the old concrete just before placing the fresh concrete. The fresh concrete shall be placed immediately after applying the cement coats. The fresh concrete shall be thoroughly vibrated near the construction joint so that the mortar from the new concrete flows between the large aggregate and develop proper bond with old concrete. The construction joint shall ensure proper bond and leak proof joint.

If use of metal, rubber or plastic water stops is specified, this shall be cast into joints. Measures shall be taken by the Contractor to ensure that no displacement or distortion of water stops takes place during placing of concrete. The construction joints shall ensure proper bond and leak proof joint.

1.2.7 DEFECTS IN CONCRETE

A. CRACKS

If external cracks developed in concrete construction are more than 0.2 mm and in the opinion of the Engineer-in-Charge, these are detrimental to the strength of the construction, the Contractor at his own expense will conduct 'Loading Tests' on the structure in the manner as specified elsewhere in this document. If under such test loads the cracks develop further, the Contractor shall dismantle the construction, carry away the debris, replace the construction and carry out all consequential work thereto.

If any cracks develop in the concrete construction are not more than 0.2 mm or in the opinion of the Engineer-in-Charge, the cracks are not detrimental to the stability of the construction, the Contractor at his own expense shall grout the cracks with neat cement grout or with other composition as directed by Engineer-in-Charge and also at his own expense and risk shall make good to the satisfaction of the Engineer-in-Charge all other works such as plaster, moulding, surface finish, which in the opinion of the Engineer-in-Charge have suffered damage either in appearance or stability owing to such cracks. The Engineer-in-Charge's decision as to the extent of the liability of the Contractor in the above matter shall be final and binding.

B. HONEYCOMBING

If any concrete be found honeycombed or in any way defective, such concrete shall be cut out partially or wholly by the Contractor as per the directions of the Engineer-in-charge and made good at his own risk and cost using pressure grouting or any other technique. If Engineer-in-Charge feels that repaired structure will not be having same strength or shape or uniformity with other exposed surface as original desired structure / original structure, the same shall be rejected by

Engineer-in-Charge and required to be dismantled and disposed by contractor at his own cost as instructed by Engineer-in-Charge. Decision of the Engineer-in-Charge shall be final binding in this regard.

On no account shall concrete surfaces be patched or covered up or damaged concrete rectified or replaced until the Engineer-in-Charge or his representative has inspected the works and issued written instructions for rectification. Failure to observe this procedure will render that portion of the works liable to rejection. Contractor shall submit methodology for rectification of defects for approval. Proprietary products for concrete repair shall be used.

1.3 Ready Mix Concrete (RMC) from RMC producer

1.3.1 If contractor procure concrete from approved RMC plant from the contractor shall, within a 3 days of award of the work, submit list of at least three RMC producers of approved suppliers with details of such plants including details and number of transit mixers & pumps etc. to be deployed indicating name of owner/company, its location, capacity, technical establishment, past experience and text of MOU proposed to be entered between purchaser (the contractor) and supplier (RMC producer) to the Engineer-in-charge. Engineer-in-charge shall give approval in writing (subject to drawl of MOU) failing which the contractor shall give list of other RMC producers of repute along with required details for approval of Engineer. The contractor shall draw the MOU with approved RMC producer and submit to Engineer-in-charge within a week of such approval. The contractor will not be allowed to use ready mixed-concrete without completion of above stated formalities.

1.3.2 For all purposes the contractor shall carry out fully the responsibilities of the “placement contractor” and the “manufacturer of concrete”.

1.3.3 The Engineer-in-charge will reserve right to inspect at any stage and reject the concrete if he is not satisfied about quality of product at the user's end.

1.3.4 The Engineer-in-charge reserves the right to exercise control over the:-

- I. Ingredients water and admixtures purchased, stored and to be used in the concrete including conducting of tests for checking quality of materials, recording of test results and declaring the materials fit or unfit for use in production of mix.
- II. Calibration check of the RMC plant.
- III. Weight and quantity check on the ingredients, water and admixture added for batch mixing.
- IV. Time of mixing of concrete.
- V. Testing of fresh concrete, recordings of results and declaring the mix fit or unfit for use. This will include continuous control on the workability during production and taking corrective action, if required.
- VI. For exercising such control, the Engineer-in-charge shall periodically depute his authorized representative at the RMC plant. It shall be responsibility of the contractor to ensure that all necessary equipment, manpower & facilities are made available to E-in-C and/or his authorized representative at RMC plant.

The contractor should therefore draw MOU/agreement with RMC producer very carefully keeping in view all terms and conditions/specifications forming part of this tender document.

1.3.5 (Conforming to IS-8112) of brand/make/source as approved by Engineer-in-charge shall 43 grade OPC only be used for production of concrete.

1.3.6 Quality control of Ready-mixed concrete

It shall be the responsibility of the contractor to ensure that RMC producer provides all necessary testing equipment's and takes all necessary measures to ensure Quality Control of ready mixed concrete. In general

the required measures shall be:-

- (I) **Control of purchased material quality**
RMC producer shall ensure that all the materials purchased and used in the production of concrete conform to the stipulation of the relevant agreed specifications/ standard and the requirements of the concrete mix design and quality control procedures. This shall be accomplished by visual checks, sampling and testing, certification from material supplier and information/data from materials supplier. Necessary equipment for the testing of all material shall be provided and maintained in calibrated condition at the plant by the RMC producer.
- (II) **Control of material storage**
Adequate and effective storage arrangement shall be provided by RMC producer at RMC plant for reliable transfer and feed systems, drainage of aggregates, prevention of freezing or excessive solar heating of aggregate, prevention of contamination etc.
- (III) **Record of mix design and mix design modification**
RMC producer shall ensure that record of mix design and mix design modification is readily available in his computer at RMC plant for inspection of Engineer-in-charge or his authorized representative at any time. Any modification in mix design shall be done only after the approval of Engineer-in-charge.
- (IV) **Transfer and weighing equipment**
RMC producer shall ensure that a documented calibration procedure is in place. Proper calibration records shall be made available indicating date of next calibration due & corrective action taken. RMC producer shall ensure additional calibration checks whenever required by E-in-C in writing to contractor. RMC producer shall also maintain a daily production record including details of customers to whom RMC was supplied including details of mixes supplied. Shall also be maintained of what materials were used for each day's production including water and admixtures.
The accuracy of measuring equipment shall be within $\pm 2\%$ of quantity of cement & $\pm 3\%$ of quantity of aggregate, admixture and water being measured.
- (V) **Maintenance of Plant, Truck Mixers and Pumps:-**
Plant, Truck Mixer and Pumps should be well maintained so as to not hamper any operation of production transportation and placement of concrete.
- (VI) **Production of concrete at RMC producing plant**
 - i) Weighing (correct reading of batch data and accurate weighing) for each load, written, printed or computerised graphical records shall be made of the weights of the materials batched, the estimated slumps, the total amount of water added to the load, the delivery tickets number for that load and the time of loading the concrete into the truck shall be produced by the contractor, failing which no payment shall be released.
 - ii) Visual observation of concrete during production and delivery of during sampling and testing of fresh concrete (assessment of uniformity, cohesion, workability, adjustment to water content):-the workability of the concrete shall be controlled on a continuous basis

during production. The batch mix found unfit shall not be loaded into the truck for transportation.

Necessary corrective action shall be taken in the production of mix as required for further batches.

- iii) Adequate testing equipment at the plant including equipment for measuring surface moisture content of aggregates shall be provided by the RMC producer.
- iv) Making corresponding adjustments at the plant automatically or manually to batched quantities to allow for observed, measured or reported changes in materials or concrete qualities.
- v) Sampling of concrete, testing, monitoring of results.
- vi) Diagnosis and correction of faults identified from observations/complaints
- vii) Control of designed and the prescribed mixes: a quality control system shall be operated to control the strength of designed mixes to the required levels. The system shall include continuous analysis of results from cube tests.

- 1.3.7 The contractor shall place the concrete by pumping wherever necessary to expedite the progress of work. Nothing extra shall be paid on this account.

SPECIAL CONDITIONS FOR CEMENT, STEEL & RCC WORK

CEMENT & STEEL REINFORCEMENT

1. Contractor has to procure Cement and Steel and has to produce manufacturers test certificate and challan for each lot of Cement & Steel Reinforcement procured at site.
2. **CEMENT**
 - (a) The contractor shall procure Portland Pozzolana Cement (conforming to IS: 1489 - Part-I), as required in the work, from reputed manufacturers of cement, such as A.C.C., Ultratech, Vikram, **Shri cement**, Ambuja, Jaypee Cement, Birla Gold & J.K. Cement or from reputed cement manufacturers having a production capacity not less than one million tonnes per annum as approved by ADG/SDG of the sub region. The tenderers may also submit a list of names of cement manufacturers which they propose to use in the work. The tender accepting authority reserves right to accept or reject name(s) of cement manufacturer(s) which the tenderer proposes to use in the work. No change in the tendered rates will be accepted if the tender accepting authority does not accept the list of cement manufacturers, given by the tenderer, fully or partially.
 - (b) Samples of cement arranged by the contractor shall be taken by the Engineer-in-Charge and got tested in accordance with provisions of relevant BIS Codes. The cement for such testing purpose shall be supplied by the contractor free of charge. In case test results indicate that the cement arranged by the contractor does not conform to the relevant BIS Codes, the same shall stand rejected and shall be removed from the site by the contractor at his own cost within a week's time of written order from the Engineer-in-Charge to do so. The cost of tests shall be borne by the contractor.
 - (c) Cement shall be brought at site in bulk supply of approximately 40 tonnes or as decided by the Engineer-in-Charge. The contractor shall have to obtain and furnish vouchers to the Engineer-in-charge in respect of all supplies of cement brought by him to the site of work.
 - (d) The cement godown of the capacity to store a minimum of 1000 bags of cement shall be constructed by the contractor at site of work for which no extra payment shall be made. Separate godowns for tested cement and fresh cement (under testing) to be constructed by the contractor at his own cost as per sketches given in C.P.W.D Specifications having weather-proof roofs and walls. The size of the cement godown is indicated in the sketches for guidance. The actual size of godown shall be as per site requirements and nothing extra shall be paid for the same. Each godown shall be provided with a single door with two locks. The keys of one lock shall remain with Engineer-in-Charge or his authorized representative of the work and that of other lock with the authorized agent of the contractor at the site of work so that the cement is issued from godown according to the daily requirement with the knowledge of both parties. The account of daily receipt and issue of cement shall be maintained in a register in the prescribed proforma and signed daily by the contractor or his authorized agent and Engineer-in-Charge or his authorized representative in token of its correctness. The day-to-day receipt and issue accounts of different grade/brand of cement shall be maintained separately in the standard proforma by the contractor or his authorized representative which shall be duly signed by the authorized representative of the Engineer-in-Charge before issue to the work on day-to-day basis.

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

The contractor shall be responsible for the watch and ward and safety of the cement go-downs. The contractor shall facilitate the inspection of the cement go-downs by the Engineer-in-Charge at any time.

- (e) The actual issue and consumption of cement on work shall be regulated and proper accounts maintained as provided in the contract. The theoretical consumption of cement shall be worked out as per procedure prescribed in Clause-38 of the contract and shall be governed by the conditions laid therein.
- (f) If the quantity of cement actually used in the work is found to be more than the theoretical quantity of cement including authorized variation, nothing extra shall be payable to the contractor on this account.
For non-scheduled items, the decision of the Chief Engineer regarding theoretical quantity of the cement, which should have been actually used, shall be final and binding on the contractor.
- (g) Wet curing period shall be enhanced to a minimum of 10 days or its equivalent. In hot & arid regions, the minimum curing period shall be 14 days or its equivalent.
- (h) Till the time, BIS makes it mandatory to print the %age of fly ash on each bag of cement, the certificate from the PPC manufacturer indicating the same shall be obtained and permission obtained from Engineer-in-Charge before use of such cements in works.
- (i) Cement brought to site and cement remaining unused after completion of work shall not be removed from site without written permission of the Engineer-in-Charge.
- (j) Damaged cement shall be removed from site immediately by the contractor on receipt of notice in writing from the Engineer-in-charge. If he does not do so within three days of receipt of such notice, the Engineer-in-charge shall get it removed at the cost of the contractor.
- (k) In case the contractor brings surplus quantity of cement the same shall be removed from the site after completion of work by the contractor at his own cost after approval of the Engineer-in-Charge.
- (l) Cement, which is not used within 90 days from its date of manufacture, shall be retested at approved laboratory. Until the results of such tests are found satisfactory, it shall not be used on the work.

3. STEEL REINFORCEMENT

- (a) The contractor shall procure corrosion resistant steel (CRS) reinforcement confirming to IS 1786:2008 (Indian Standard Specification for high strength deformed steel bars and wires for concrete reinforcement). TMT bars of Fe 550D from primary producers or steel manufacturers such as SAIL, Tata Steel Ltd & RINL, JINDAL STEEL & POWER Ltd and JSW STEEL or their authorized dealers having valid BIS license for IS: 1786-2008 (Amendment -1 November 2012). Only corrosion resistant steel (CRS) shall be used.

The procured steel should have following qualities:

Excellent ductility, bend ability and elongation of finished product due to possible refining technology. Consumption of steel should be accurate as per design Steel should have no brittleness problem in finished product. Steel should carry the quality of corrosion and earthquake resistance.

Quality steel with achievement of proper level of sulphur and phosphorus as per IS: 1786-2008. The TMT bars procured from primary producers shall conform to manufacture's specifications. TMT bars procured from primary producers, the specifications shall meet the provisions of IS 1786: 2008 pertaining to Fe 550 D grade of steel having elongation more than 14.5 % and confirm to other requirements.

- (b) The contractor shall have to obtain and furnish manufacturer's test certificates and vouchers to the Engineer-in-charge stating the process of manufacture, chemical composition and test sheet giving result of each mechanical test applicable in respect of all Supplies of steel brought by him to the site of work. Each test certificate shall indicate the number of the cast to which it applies corresponding to the number or identification mark to be found on the material. The contractor shall obtain Original Vouchers and test Certificates and furnish the same to the Engineer-in-Charge in respect of all the lots of steel brought by him from approved supplier to the site of work. All consignment received at the work site shall be inspected by the Site staff along with the relevant documents before acceptance. The original vouchers and test certificate of manufacturer shall be entered in respective registers by the Site Staff and kept on record in the site office.
- (c) The Engineer-in-Charge shall get each consignment tested for both Chemical composition and physical properties (including bend and re-bend test) as specified in this regard in relevant BIS codes, from any Government laboratory or other NABL accredited laboratory, as approved by the department. In case the test results indicate that the steel arranged by the contractor does not conform to the specifications the same shall stand rejected, and it shall be removed from the site of work by the contractor at his cost within a week time or written order from the Engineer-in-Charge to do so. Else the department shall remove it and recover double the cost of removal from the contractor.
- (d) The steel reinforcement bars shall be brought to the site in bulk supply of 20 tonnes or more, or as decided by the Engineer-in-charge.
- (e) The steel reinforcement bars shall be stored by the contractor at site of work in such a way as to prevent their distortion and corrosion, and nothing extra shall be paid on this account. Bars of different sizes and lengths shall be stored separately to facilitate easy counting and checking.
- (f) For checking nominal mass, tensile strength, bend test, re-bend test etc. specimens of sufficient length shall be cut from each size of the bar at random, and at frequency not less than that specified below:

Size of bar	For consignment below 100 tonnes	For consignment above 100 tonnes
Under 10mm dia bars	One sample for each 25 tonnes or part thereof.	One sample for each 40 tonnes or part thereof.
10mm to 16mm dia bars	One sample for each 35 tonnes or part thereof.	One sample for each 45 tonnes or part thereof.
Over 16mm dia bars	One sample for each 45 tonnes or part thereof.	One sample for each 50 tonnes or part thereof.

CORRECCION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

- (g) The contractor shall supply free of charge the steel required for testing including its transportation to testing laboratories. The cost of tests shall be borne by the contractor. All expenditure to be incurred for testing of samples e.g., packaging, sealing, transportation, loading, unloading etc. including testing charges shall be borne by the contractor.
- (h) The actual issue and consumption of steel on work shall be regulated and proper accounts shall be maintained as provided in clause 10 of the contract. The theoretical consumption of steel shall be worked out as per procedure prescribed in clause 38 of the contract and shall be governed by conditions laid therein. In case the consumption is less than theoretical consumption including permissible variations leading to under designing of the structure, the work shall be summarily rejected, otherwise recovery at the rate so prescribed shall be made after ensuring structural soundness and stability. In case of excess consumption, no adjustment needs to be made.
- (i) The steel brought to site and the steel remaining unused shall not be removed from site without the written permission of the Engineer-in-charge.
- (j) The contractor shall submit original vouchers from the manufacturer for the total quantity of steel supplied under each consignment to be incorporated in the work. All consignment received at the work site shall be inspected by the Site staff along with the relevant documents before acceptance. The contractor shall obtain Original Vouchers and Test Certificates and furnish the same to the Engineer-in-Charge in respect of all the lots of steel brought by him from approved supplier to the site of work. The original vouchers and test certificates of manufacturer shall be entered in respective registers by the Site staff and kept on record in the site office.
- (k) Reinforcement including authorized spacer bars and laps shall be measured in length of different diameters as actually (not more than as specified in the drawings) used in the work nearest to a centimetre. Wastage and unauthorized overlaps shall not be measured.

The standard sectional weights referred to as in Table 5.4 in para 5.3.4 in CPWD Specifications for works 2019 Vol. 1 will be considered for conversion of length of various sizes of M.S. Bars, Steel Bars and T.M.T. bars into Standard Weight.

Records of actual Sectional weights shall also be kept dia-wise and lot-wise. The average sectional weight for each diameter shall be arrived at from samples from each lot of steel received at site. The decision of the Engineer-in-Charge shall be final for the procedure to be followed for determining the average sectional weight of each lot. Quantity of each diameter of steel received at site of work each day will constitute one single lot for the purpose. The weight of steel by conversion of length of various sizes of bars based on the actual weighted average sectional weight shall be termed as Derived Actual Weight. However, for the stipulated issue of steel reinforcement up to and including 10mm diameter bars, the actual weight of steel issued shall be modified to take into account the variation between the actual and the standard coefficients and the contractors' accounts will be debited by the cost of modified quantity.

If the Derived Weight as in sub-para (2.3.13) above is less than the Standard Weight as in Sub-para (2.3.12) above then the Derived Actual Weight shall be taken for payment provided, if it is within the following tolerances specified in IS1786-2008, otherwise whole lot will be rejected.

Tolerances on Nominal Mass (individual sample) shall be as under

Sl. No.	Nominal size mm	Tolerances on the Nominal Mass, percentage
---------	-----------------	--

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

1	Upto and including 10	-8%
2	Over 10 upto & including 16	-6%
3	Over 16	-4%

If the Derived Actual Weight is found more than the Standard Weight, the Standard Weight as per in sub-para (2.3.12) above shall be taken for payment. In such case nothing extra shall be paid for the difference between the Derived Actual Weight and the Standard Weight.

Mixing of different type of steel/different grades of steel shall not be allowed in the same structural members as main reinforcement to satisfy clause 26.1 of IS:456.

3. R.C.C. WORK

3.1 Design Mix Concrete.

3.1.1 Design mix concrete shall be used in the work for all structural members. For design mix concrete revised CPWD specifications 2019 along with relevant IS codes shall be followed in general along with the specific provisions made herein.

The term machine batched, machine mixed and machine vibrated design mix cement concrete used in the document shall mean the concrete produced in fully automatic concrete batching & mixing plant (IS 4925), placed in position by the concrete pump and vibrated by surface vibrator/ needle vibrator/ plate vibrator, as the case may be to achieve the required strength and durability. (However, for small elements like lintels, chajjas, shelves etc, the requirement of pumping would be dispensed with as per direction of Engineer – in – charge and placement would be done through alternative means).

SPECIAL CONDITIONS FOR DESIGN MIX CONCRETE

The RCC work shall be done with Design Mix Concrete. Wherever letter “M” has been indicated, the same shall imply for the Design Mix Concrete. The Design Mix Concrete will be designated based on the principles given in IS: 456, 10262 & SP 23. The Conditions & Specifications stated herein shall have precedence over all conditions & specifications stated in relevant I.S. Codes / C.P.W.D. Specifications. The concrete mix shall be designed for the specified target mean compressive strength in order to ensure that work test result do not fall below the acceptance criteria specified for the concrete mix. The cement shall be actually weighed as presumption of each bag having 50kg shall not be allowed. The Contractor shall design mixes for each class of concrete indicating that the concrete ingredients and proportions will result in concrete mix meeting the requirements specified. Nothing extra shall be paid on this account.

- (a) The contractor has to submit design mix without use of admixtures.
- (b) Admixture may be added in case of specific technical requirement so as to meet the workability / slump requirement or for any other reason but nothing extra is to be paid to contractor on account of adding admixtures. The admixture shall conform to IS: 9103. The chloride content in admixture shall satisfy the requirement of BS: 5075. The total amount of chlorides in admixture mixed concrete shall also satisfy the requirements of IS: 456:2000. Admixtures shall not be used without approval of Engineer-in-Charge. Whenever required, the admixture of approved quality & approved make only shall be used to attain the required workability. Nothing extra on account of use of Admixture / Plasticizer shall be payable.

3.1.2 The sources of coarse aggregate, fine aggregate, water, admixture & cement to be used in concrete work shall be identified by the contractor & he will satisfy himself

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

regarding their conforming to the relevant specifications & their availability before getting the same approved from the Engineer-In-Charge.

- 3.1.3** The contractor shall be required to submit two separate design mix of concrete with and without using plasticizers, separately. The decision of the engineer-in-charge to specify the design mix of concrete based on above shall be final.

Coarse aggregate: As per CPWD Specifications

Fine Aggregate: As per CPWD Specifications.

Water: It shall conform to requirements laid down in IS:456 : 2000 and CPWD specifications.

Cement: Cement arranged by the contractor will be PPC (in bags) conforming to IS: 1489-Part-I. If for any reasons, cement other than that specified in this para for example OPC of grade 43 or higher grade is brought to site by contractor, the issue, payments rate as well as the quantity to be used in the design mix concrete will remain unchanged. Slump: Design slump should be clearly specified in the mix design.

Admixtures shall not be used without approval of Engineer-in-charge. Wherever required, admixtures of approved quality shall be mixed with concrete as specified. The admixtures shall conform to IS: 9103. The chlorides content in the admixture shall satisfy the requirements of BS: 5075. The total amount of chlorides admixture mixed concrete shall also satisfy the requirements of IS: 456. The contractor shall not be paid anything extra for admixture required for achieving desired workability without any change in specified water cement ratio for RCC/CC work.

Grade of Concrete: The compressive strength of various grades of concrete shall to be given as below:

	Grade designation	Compressive strength on 15 cm cubes min. 7 days (N/mm ²)	Specified characteristic compressive strength at 28 days (N/mm ²)	Maximum water cement ratio
I	M 25	As per design	25	0.50
ii	M 30	As per design	30	0.45
iii	M 35	As per design	35	0.45
iv	M 40	As per design	40	0.40
v	M 50	As per design	50	0.50

Note

- (i) In the designation of a concrete mix letter M refers to the mix and number to the specified characteristic compressive strength of 15 cm x 15 cm x 15 cm – cube 28 days expressed in N/mm²

The cement content in concrete for structural members for all RCC and PSC members shall be governed by design requirement and as per codal provisions.

Design slump has to be constantly monitored and maintained during placing of concrete through slump tests carried out as per CPWD specification 2019 Vol. 1 for Mortar, Concrete and RCC works, and records maintained accordingly.

The concrete mix design/laboratory tests with and without admixture shall be got

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

done by contractor at his own cost and will be carried out by the contractor through one of the Approved laboratory/Test houses /Govt. Engineering Institutions as directed by the Engineer-in-charge.

The various ingredients for mix design / laboratory tests shall be sent to the test houses through the Engineer-in-Charge and the samples of such aggregate & cement shall be preserved at site by the department

The contractor shall submit the mix design report from any of above approved laboratory for approval of Engineer-in-Charge within 30 days from the date of issue of letter of acceptance of the tender. No concreting shall be done until the mix design is approved by the Engineer-in-charge. In case of white Portland cement and the likely use of admixtures in concrete with PPC/White Portland cement the contractor shall design and test the concrete mix by using trial mixes with white cement and/or admixtures also for which nothing extra shall be payable.

In case of change of source or characteristic properties of the ingredients used in the concrete mix during the work, a revised laboratory mix design report conducted at laboratory established at site shall be submitted by the contractor as per the direction of the Engineer-in-Charge.

APPROVAL OF DESIGN MIX

The mix design for a specified grade of concrete shall be done for a target mean compressive strength $T_{ck} = F_{ck} + 1.65 s$.

Where F_{ck} = Characteristic compressive strength of 28 days

s = Standard deviation which depends on degree of quality control

The degree of quality control for this work is "good" for which the standard deviation (s) obtained for different grades of concrete shall be as bellows:

Grade of Concrete	For "Good" quality of control
M 25	4.00
M 30	5.00
M 35	5.00
M 40	5.00
M 50	5.00

Of the six specimen of each set three shall be tested at seven days and remaining three at 28 days. The preliminary tests at seven days are intended only to indicate the strength to be attained at 28 days.

All cost of mix designing and testing connected therewith including charges payable to the laboratory shall be borne by the contractor.

The batching plant shall conform to IS:4925. It shall have the facilities of presetting the quantity to be weighed with automatic cutoff when the same is achieved. Concreting at places may have to be resorted to through concrete pump for which nothing extra shall be paid.

All other operations in concreting work like Mixing, Slump, Laying Placing of concrete, compaction curing etc. not mentioned in this particular specification for Design Mix of concrete shall be as per CPWD specification.

IMPORTANT CONDITIONS FOR DRAIN WORK

1. Site conditions specified hereunder and elsewhere are given as guidelines and contractor shall satisfy himself regarding all aspects of site conditions and no claim will be entertained on the plea that the information supplied by the department is erroneous or insufficient.
2. Work has to be executed without disrupting the traffic and thus, limited space shall be available for execution of the work.
The contractor will have to carefully plan his sequence of operations so that the traffic moves unhindered at all times. The traffic diversion plan evolved by the contractor for execution of the work at all locations will require approval of Delhi Traffic Police and of the department. Modifications suggested by the Traffic Police and also by the department shall be implemented by the contractor during execution of the work.
3. This is a work of construction of drain on the same alignment of existing drain after demolishing it. Therefore, the site will be made available in parts without disturbing existing flow. The agency will submit diversion and demolition plan of the existing drain for approval of Engineer-in-Charge before start of execution of the work.
4. The work site is located in highly populated and urban area having high traffic and high-rise building structures, underground utilities and also many other structures like FOB, Subway etc. in/nearby the alignment of drain. Accordingly on handing over of the site, the contractor shall initially do a detailed comprehensive study of the entire alignment of the drain including GEO survey using Ground Penetrating Radar (GPR) and his assessment of the feasibility of the execution with respect to aspects like alignment, invert level, utilities that may require shifting etc. (in view of underground utilities and permanent structures) and other execution challenges that are likely to be faced and prepare the comprehensive work plan of construction for a smooth execution of work at site. This comprehensive work plan will be submitted within one month of date of start and will be got approved by Engineer-in-Charge.
5. The work site is located in highly populated and urban area where numerous various types of utilities (electric telecom cables/waterlines/gas lines may be encountered in execution of work. The same shall be protected to the extent possible, if not fouling with the work. However, in case the same are required to be shifted, the same shall be preferably be shifted by the agency and payment, if admissible, for same shall be made. In case of specialised utilities like high power electric cables, gas line, telecom lines, electric substation etc. then the same shall be got shifted by the department. In this case suitable extension of time shall be granted to the agency. No compensation beyond agreement provisions shall be payable for any such extension of time, so granted to the agency.

Climatic conditions

6. The climate in the region is extreme with three major seasons-winter, summer and rainy. The winter season lasts from October to March, summer season from April to June and rainy season from July to September. This is only for guidance and there may be variations.

DISPOSAL OF C & D WASTE

7. The agency shall have to dispose of all generated C&D waste material/ Malba/ Rubbish, etc. from the site within two days of its generation. The generated C&D waste material/ Malba/ Rubbish, etc. have to dispose of at authorized /notified/ specified dumping ground. In non-compliance of the above Engineer-in-Charge will dispose of the same at the risk and cost of the agency. The decision of Engineer-in-Charge will be final and binding on the contractor.
8. The agency shall submit the original receipt of Disposal fees, of authorized /notified/ specified dumping ground, if any, to the Engineer-in- Charge for reimbursement of the same within next 48 hours of the disposal. After specified period, his claim for reimbursement will not entertain and no payment for reimbursement of Disposal Fees will be made to him under any circumstance.
9. After the work is completed, all left-over, junk and the scarp materials should be

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

- cleared from the site immediately. No final bill shall be paid until and unless the work site is handed over in a clean condition.
10. Failure to clear C&D waste from work site regularly shall result in levy of Compensation of Rs.5 Lakhs on the Contractor for each default apart from any other action as per contract clauses.

PUMPING AND BAILING OUT WATER

11. For works at/below ground level, the contractor shall keep that area free from water. If dewatering or bailing out of water is required, the contractor shall do it to execute the work and nothing extra shall be paid except otherwise provided in the items of schedule of quantities. This bailing out of water from site will not only include ground water but also water accumulated at site due to rain or any other reason including water from existing drain/nearby drains.

DIVERSION OF EXISTING DRAIN

12. As the work is to be executed at the alignment of existing drain after diverting drain water/effluent from existing drain by excavating trench/providing RCC pipes of required size/by pumping arrangements for the purpose of construction of new drain at the alignment of existing drain. Water logging occurred due to any reason including storm water, sewer etc. is to be removed to nearby drain (Hiran Kudna etc.) for which nothing extra will be paid. Nothing extra will be paid for dewatering, removal of sludge, providing pumps, pipe etc. except payment under agreement item of diversion to be measured in length of existing drain from which water is to be diverted.

CLOSE TIMBERING PLANKING AND STRUTTING:

13. When the depth of trench/excavation in soft/loose soil exceeds 2 metres, stepping, sloping and/ or planking and strutting of sides shall be done. In case of loose and slushy soils, the depths at which these precautions are to be taken, shall be determined by the Engineer-in-Charge according to the nature of soil. The payment for providing close timbering will be made only if the depth of trench/excavation in soft/loose soil exceeds 2 metres. No payment of close timbering will be made, even if it is provided, in the area where the depth of trench/excavation in soft/loose soil is upto 2 metres.

OFFICE EQUIPMENT'S

14. For Quality Control Measures, Preparation of Bills and Monitoring the Quality, the contractor shall provide one Computer having Intel core i7 processor, MS-Windows-10, A-3 Coloured Inkjet & A-4 LaserJet Printers, Scanners, UPS etc. in the site office of Engineer-in-Charge.

SHUTTERING

To achieve the timely completion of work, the contractor will arrange minimum shuttering material at site as detailed below:-

a) Shuttering for RCC wall of drain	=	200 sqm.
b) Shuttering for RCC roof slab of drain	=	100 sqm.

The above requirement is indicative and minimum. However, to achieve timely completion of work, the contractor may have to arrange more shuttering material at site and nothing extra shall be paid on this account.

GENERAL SPECIFICATIONS FOR RCC U SHAPE PRE-CAST DRAIN

The topographical survey, alignment survey and Geo survey using Ground Penetrating Radar (GPR) for road side storm water drains, Nalla channelization & Nalla development works, and cross drainage works etc. shall be done by the contractor within one month of date of start to taking up respective items of work from the schedule of quantity. All the details of Reduced Levels taken by the contractor should be tallied with the working drawing issued for execution by M/s Green design and engineering services Pvt. Ltd. Any discrepancy found should be brought to the knowledge of Engineer-in-Charge before execution of work.

The nature and scope of work covered under various sub-works shall be as under

Road side storm water drains

The work mainly consists of laying road side Precast RCC U shape Drain and construction of RCC storm water drain/RCC Storm Water inlet chambers of various sizes for pipe drains, road side RCC box type drains, curb type inlets, precast surface gutters, connections of gutters with main drains, etc. for collection & conveyance of the storm water to the natural water courses. Ancillary work includes excavation in various types of strata, dismantling and relaying cables, poles, pipelines and other structures coming in the way of the work; relaying water mains and reinstating the roads etc.

The work consists of replacement of existing storm water drain works along the road, including foundations, substructure, superstructure and other related works.

Removing of sludge from existing drain if required for all leads and lifts shall be removed through vehicle and dump in authorized Municipal dumping ground as directed by Engineer-in-Charge.

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

Design, Manufacture, Supply and laying of factory-made (wet cast) Precast U Shape Drain of Width X Height as per BOQ made up of high strength precast reinforced cement concrete duly steam cured in a controlled environment and manufactured using high performance self-compacting concrete of M-50 grade using Fe 550D grade TMT steel reinforcement bar. Design should confirm to BIS / JIS standards / Guidelines/ Codes furthermore taking into consideration expected handling and erection stresses etc. It shall be designed for 10 T Axle Load-5T Wheel Load. Criteria for providing pre-cast RCC U shape drain are enlisted below.

i) Precast factory shall have ISO 9001, ISO 14001 and ISO 45001 for design, manufacture and dispatch of products.

ii) Product shall be manufactured using RO water for durability criteria.

iii) Steam Curing boiler system with automated steam control system for this production quantity.

iv) QA-QC set up with NABL approved in-house laboratory with all equipment to test all raw materials & fresh concrete. Affidavit stating association with outside laboratory is not permitted.

v) Reinforcement cage shall be fabricated with in-house automated cage making unit having necessary machines like cutting and bending for getting consistent rebar production.

Laying and jointing: Unloading of precast concrete drains shall be done as per the standard guideline. Laying trench shall be prepared with PCC of appropriate thickness. Dry levelling cement mortar of 5-15 mm thickness shall be placed on the PCC Course to level the surface. Precast drains shall be lifted with suitable lifting devices for placing. The product shall have a tie shape groove of 10-20 mm width and 25 mm depth on both sides for joining two precast units. The groove joint shall be filled with non shrink grout

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

Quality Assurance: The product shall be manufactured from standard and tested raw materials including cement, fine aggregate, coarse aggregate, concrete and reinforcement. The water used for manufacturing of concrete should be potable water with TDS value not more than 300 ppm. The product shall be steam cured in the controlled environment for better quality control A with a temperature control of 45 ± 2 Deg. Centigrade to 65 ± 2 Deg. Centigrade. Precast factory shall have in-house NABL approved testing facility for quality checks. The factory-made precast products shall be subject to strict quality control and assurance process by the manufacturer and approved by quality assurance personnel. The product must have reinforcement as per design drawings. The product should be handled mechanically at site. The product shall have in-built inserts at optimized locations for handling/transportation.

BRIEF SPECIFICATIONS OF PRECAST MANUFACTURER

Factory and Material Standard

M-50 grade Self compacting concrete using excellent quality sand as per IS-383, maximum aggregate size 15 mm machine cut aggregates of approved quality & size as per IS-383, OPC - 53 grade cement confirming to IS :269 of reputed brand having major cement plant, Super plasticizer as per IS-9103, R.O water as per IS-456. Fe 550D or more steel confirming to IS 1786. Excellent Quality of welding rods (IS code) for manufacturing reinforcement cage, for fixing the reinforcement in place High grade plastic spacers. High quality lifting studs of appropriate weight bearing capacity and all other required material to produce the Precast Drain, Box Culvert, Retaining wall, Manhole chamber, Box Culvert, Retaining wall, Manhole chamber in all the aspects and respects.

Workmanship at Precast Factory:

The Precast Drain, Box Culvert, Retaining wall, Manhole chamber shall be produced using excellent workmanship as per the detail and quality of the workmanship given below

M-50 grade Self compacting concrete is mix created by using state of the art computer controlled customised batching plant within the factory. Concrete will be taken to the assembly line & gently poured into the mould by remote control disposal in place. The mould is made out of using high grade automobile steel with technology as described under mould section.

It shall be manufactured in controlled environment adhering to stringent pre-defined, atmospheric standards. The factory-made precast product shall be subject to strict quality control and assurance process by the manufacturer and approved by quality assurance personnel. In no case, the site-casting of the product shall be allowed. Detailed QAP plan shall be submitted by the supplier for regular product inspection.

After pouring of concrete into the mould, it shall be taken for controlled temperature and steam curing process. The entire assembly shall be kept under steam curing before de- molding. The product will be kept for the period of approximately 14 days at production site prior to the dispatch from the production site. While pouring the concrete into the mould the concrete samples are taken as per IS code. Each precast unit should have date on manufacturing for traceability. The factory should provide concrete compressive test results before dispatch of material from factory.

The stacking of precast unit shall be carried out as per the prescribed manner using wooden planks to avoid any damages. This product is designed to take care of the forces generated while lifting it & placing it at the desire location at depth using the machinery i.e crane of suitable capacity. To facilitate the lifting of the precast product, in-built lifting arrangements of appropriate load capacity for the fixing the hooks & lifting belts.

Precast products shall be of approved make as per Engineer in charge. Qualifying criteria for precast manufacturer are as enlisted below,

- i) Precast manufacturer shall be certified for relevant ISO certification.
- ii) The precast factory should have its own NABL approved QA-QC laboratory within plant premises to ensure daily testing of precast products. agreement stating association with outside laboratory is not permitted. NABL certificate shall be in name of bidder.
- iii) Precast manufacturer shall submit the design calculation report of each product with calculation details considering lifting loads.
- iv) Precast product testing laboratory to test load carrying capacity. Test certificate of Precast product testing shall be submitted.
- v) Product shall be manufactured using RO water for durability criteria. Separate RO water plant of sufficient capacity to support manufacturing of all precast concrete products.
- vi) Steam curing boiler with automated regime of equivalent capacity of concrete batching plant for manufacturing of precast elements.
- vii) Reinforcement cage shall be fabricated with automated cage making unit within plant premises having necessary machines like cutting and bending for getting consistent rebar production. Equipment purchase invoice.

Above documents along with agreement with precast manufacturer shall be submitted by Contractor for prior approval from Engineer-In-Charge.

Rebar Cage:

The required reinforcement as per drawing by using Fe 550D or more steel is cut in to proper sizes by using automated rebar cutting machine. The production facility must have automated cutting and bending machineries. The cage is given the appropriate shape by automatic bending machine which in reference the mould size and shape and as per the design to be put inside the mould. The entire steel assembly is kept into place inside the mould by using high grade necessary plastic spacers.

Mould:

Moulds shall be designed using finite element method for structure, vibration, fluid and thermal analysis. The know-how is theoretically systematized using three-dimensional CAE tools to mould technological ability. The CAE tools are also used to develop new mechanism of moulds and calculate strength.

Moulds shall be manufactured with 100% accuracy to get the final product having a dimension error of ± 3 mm. Moulds shall be manufactured using automobile grade steel. Integrated production system with latest machine. One touch system shall be adopted for stripping and setting. Clamping system shall be of Japan or Germany to have dimensional accuracy for long horizon. Every mould shall be tested for watertightness inspection by experts. This will restrict seepage of concrete water from moulds. Mould manufacturer shall have an experience of more than 5 years with supply of large size precast box culverts, wall, drains.

Workmanship at Installation Site:

The excavation shall be carried out in proper manner as per the required depth and width for easy installation and fixing of precast products considering groove filling, flange coupling jointing arrangements and special in-built lifting arrangements at appropriate locations for faster & safe installation of the product.

The contractor shall prepare & provide the base using PCC as a levelling course as per drawing/ as recommended by the consultant depending upon the foundation soil strata.

The jointing of two precast products shall be done by Groove Filling to minimize the joints between two precast units as approved by engineer in-charge / client / consultant. The entire assembly should be in line level & perfectly carried out at site as per the design, drawing & instruction given by engineer in charge.

Transportation, Unloading, Stacking & Placing**Transportation of Precast products**

- Precast products shall be transported from the manufacturing plant to the project site using flat - bed trailers of adequate load capacity.
- Products shall be placed on wooden battens / rubber pads during transportation to avoid direct contact with the vehicle bed.
- Adequate lashing, nylon belts, chains, and corner protectors shall be used to prevent movement, impact, or abrasion during transit.
- A traffic management plan shall be implemented at site for safe movement of transport vehicles. Entry and exit routes shall be clearly marked, with designated parking and unloading zones.
- Flagmen / signalmen shall be deployed wherever required to manage vehicle

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

movement and pedestrian safety.

- Unloading operations shall be scheduled to avoid congestion and interference with other site activities.
- Night movement, if required, shall be carried out with proper lighting and reflectors.

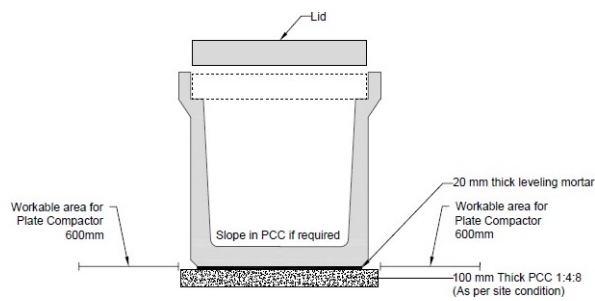
Unloading & Stacking of Precast products

- Unloading shall be carried out using hydra cranes, mobile cranes, or forklifts of adequate lifting capacity.
- Lifting tools shall be placed at inbuilt inserts of the product for safe handling at site.
- Products shall be placed on level ground over wooden planks immediately after unloading.
- Precast products shall be stacked on wooden planks to prevent direct contact with ground.
- Planks shall be placed on firm, level, and compacted ground to avoid settlement or tilting.
- Stacking height shall be limited as per product size and stability considerations.

Safety and Quality Control

- All personnel involved shall wear PPE including helmets, safety shoes, gloves, and reflective jackets.
- Barricading and warning signage shall be provided in handling and unloading zones.
- All operations shall comply with relevant IS codes, safety norms, and project specifications.

Precast U Shape Drain T 25



CORRECCION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

Precast Box Culvert



CORRECCION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

(TABLE-1)

Equipment's for Testing of Materials of Concrete at Site Laboratory

All necessary equipment for conducting all necessary tests shall be provided at the site in the well furnished site laboratory by the contractor at his own cost. The following minimum laboratory equipment's shall be set up at site office laboratory-

Sl. No.	Equipment	Numbers (Minimum)
1	Slump cone	2
2	Graduated glass measuring cylinder	As per requirement
3	Sets of sieves for coarse aggregate	2
4	Sets of sieves for fine aggregate	2
5	Cube moulds size 70mmx70mmx70mm	5
6	Cube moulds size 150mmx150mmx150mm	10
7	Electronic balance 100 kg	1
8	Physical balance weight upto 5kg	1
9	Measuring jars 100ml, 200ml, 500ml	3 Nos. each
10	Gauging trowels 100mm & 200 mm with wooden handle	3 Nos. each
11	Spatula 100mm & 200mm with long blade wooden handle	2 Nos. each
12	Vernier calipers 12" & 6" size	2 No. each
13	Screw gauge 0.1mm -10mm, least count 0.05	2 Nos.
14	Thickness gauge for measuring flakiness index	1 No.
15	Elongation gauge	2 Nos.
16	Measuring cylinder 3,5,10 & 15 liter cylinder	2 Nos. each
17	Motorized sieve shaker	1 No.
18	Digital Thermometer upto 150° C	5 Nos.
19	Pruning Rods 2kg weight length 40 cm and ramming face 25 Sqm.	2 Nos.
20	Extra Bottom plates for 15 cm cube mould	6 nos.
21	Concrete temperature measuring thermometer with Brass protection sheath 0- 100 degree centigrade	2 Nos.
22	Mortar Cube vibrator	1 No.
23	Cone equipment for density test	1 No.
24	Any other equipment for site tests as outlined in BIS and as directed by the Engineer-in-charge.	1 No.

Note:

- Contractor shall set up within 15 days from the award of work a testing lab at site or shall provide a van mounted portable testing lab including all necessary equipments and skilled manpower for field testing on his own cost.**
- The necessary outside tests shall be conducted in the lab of Delhi Technical University, Delhi / CPWD/PWD / CRR/IIT Delhi /IIT Roorkee /NTH or any other approved Government Engineering College. The sample of carrying out all or part of the tests shall be collected by the Engineer-in-charge or on behalf of officer-in-charge of the quality assurance wing of Central Design organization, CPWD and his authorized sub-ordinate or by the officer-in-charge of PWD or his authorized sub-ordinate and authorized representative of Testing Laboratories for carrying out the independent quality assessment / control test and the results

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

will be binding on the contractor. The contractor or his authorized representative shall associate in collection, preparation, forwarding and testing of such samples. In case he or his authorized representative is not present or does not associate himself, the result of such tests and consequences thereon shall be binding of the contractor.

3. **Third party quality assurance by technical team of any reputed institution such as DTU/CBRI/IIT and like will be done and the report submitted by the quality assurance team shall be communicated to the contractor by the Engineer-in-charge. The contractor has to comply / rectify the defects/ shortcomings pointed out by the quality assurance team at his own cost within the time specified by Engineer-in-charge.**

CONDITION FOR SECURITY DEPOSIT

Defect liability period of the work will be 12 months.

Deduction for security deposit

1. 2.5% of tendered value of schedule of quantity will be deducted in every bill.

Release of security deposit

1. *The security deposit deducted @ 2.5% of tendered value of schedule of quantity will be released only after successful completion of defect liability period of 12 months.*

Proforma For Mandatory Tests to Be Attached With Running Bills

Name of the work:

Name of contractor.....

Agreement no. and date

R/A Bill No.....

Sl. No.	Item	Quantities as per agreement	Frequency as per specification	No. of tests required	Upto date quantity	No. of tests required	No. of tests actually done	Remarks
1	2	3	4	5	6	7	8	9

Note: If the number is less than that required, then reasons shall be recorded.

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

Special Condition for submission of final bill by contractor

1. All measurement of all items having financial value shall be entered by the contractor and compiled in the shape of the Computerized Measurement Book having pages A-4 size as per the provision given in General Condition of Contract and shall be submitted online within 7 days of the execution of the drain work along with copy of supporting photographs.
2. The contractors shall submit his final bill to the Executive Engineer within one month of completion of work, which shall be checked and if found satisfactory shall be paid by Engineer-in-Charge within prescribed time limit given in clause-9 of GCC. No further claims shall be made by the contractor after submission of the final bill and these shall be deemed to have been waived and extinguished.
3. In case he fails to submit the final bill within above mentioned time limit, the bill shall be finalized the Executive Engineer after giving notice of 15 days to the contractor.
4. The original GST bill, for all materials used in the particular work, purchased after award of work shall be compulsorily submitted, these GST bill of material is to be certified by the concerned AE/JE. No bill will be entertained in the absence of the original GST Bill.

Special Condition of National Green Tribunal (NGT)

1. As per orders issued by Hon'ble National Tribunal (NGT) in respect of improvement of ambient air quality, the agencies shall ensure that all the trucks or vehicles of any kind which are used for construction purposes and/or are carrying construction materials like cement, sand and other allied material shall be fully covered. The vehicles would be properly cleaned, shall be dust free and/or other precautions would be taken to ensure that en-route their destinations, the dust, and or other particles are not permitted to be released in the air and/or contaminate air.
2. No melting/hot mixing of bitumen/bituminous byproduct is allowed at site/open roads, it is the responsibility of the agency to ensure that their activity does not cause any air pollution during the course of execution of work and/or storage of material or any other activity. In the event of default the agency shall be liable to be prosecuted under the law in force as well as for causing environmental pollution and shall also be liable to pay compensation which would be determined by the tribunal in accordance with law.
3. During the execution, cleaning of the surface will be done by the sucker machines instead of traditional air compressors, so that air pollution can be prevented. The contractor shall also ensure that there will be no burning of leaves, branches, garbage, bitumen etc any material at site.
4. The agency would not be permitted to store/dumping of construction material or debris on the metalled road.
5. Construction material or debris stored shall be completely covered by tarpaulin at physically demarcated space by the Engineer-in-Charge. Agency shall also ensure that such storage does not cause any obstruction to the free flow of traffic and/or inconvenience to pedestrians.
6. Agency shall ensure that all the labourer persons should wear the medical mask at site during the execution of any work. Nothing shall be paid extra on this account.
7. All the vehicles deployed at site should not be more than ten years old (for diesel vehicles) & not more than Fifteen Years (for petrol vehicles).

Special Condition for Malba Disposal

- 1 Agency will taken necessary photographs before & after for all locations of dumped malba authorized or unauthorizedly on daily basis to kept in record.
- 2 The disposal of silt/sludge/building rubbish/earth mixed malba to the authorized MCD dumping ground shall be done through mechanical transport for Disposal of Malba.
- 3 The disposal of silt/sludge/building rubbish/earth mixed malba has to be done in trucks/dumpers covered with polythene/Tarpolin sheets from hygienic point of view.
- 4 The malba shall be disposed/removed from the site within 48 hours from the time of intimation from the Engineer-in-Charge.
- 5 For the purpose of removal of malba contractor shall have to make his own arrangement of adequate no. of vehicles required at the MCD authorized dumping ground including necessary registration of vehicles for this purpose. Nothing extra shall be paid on this account.
- 6 The contractor shall intimate contact number/ mobile number of himself as well as of the supervisory staff who have to carry out this job of disposal of malba.
- 7 All the C&D waste generated from dismantlement in PWD works shall be transported/disposed off at the identified landfill sites of Municipal Corporation of Delhi and documentary evidence in form of receipts from Municipalities and video record of pre-measured stacks has to be mandatorily submitted to the department, failing which a penalty at the double the prevailing rate of transportation plus processing fee payable at the landfill site shall be recovered and no payment for concerned agreement item and reimbursement of processing fee shall be made to contractors.

Special Conditions to Prevent Air Pollution

1. The contractor shall not store / dump construction material or debris on metalled road.
2. The contractor shall get prior approval from Engineer-in-Charge for the area where the construction material or debris can be stored beyond the metalled road. This area shall not cause any obstruction to the free flow of traffic / inconvenience to the pedestrians. It should be ensured by the contractor that no accidents occur on account of such permissible storage.
3. The contractor shall take appropriate protection measures like raising wind breakers of appropriate height on all sides of the plot / area using CGI sheets or plastic and / or other similar material to ensure that no construction material dust fly outside the plot area.
4. The contractor shall ensure that all the trucks or vehicles of any kind which are used for construction purposes / or are carrying construction materials like cement, sand and other allied material are fully covered. The contractor shall take every necessary precautions that the vehicles are properly cleaned and dust free to ensure that en-route their destination, the dust, sand or any other particles are not released in air / contaminate air.
5. The contractor shall provide mask to every worker working on the construction site and involved in loading, unloading and carriage of construction material and construction debris to prevent inhalation of dust particles.
6. The contractor shall provide all medical help, investigation and treatment to the workers involved in the construction of building / roads and carry of construction material and debris relating to dust emission.
7. The contractor shall ensure that C&D waste is transported to the C&D waste site only and due record shall be maintained by the contractor.
8. The contractor shall compulsory use of wet jet in grinding and stone cutting.
9. The contractor shall comply all the preventive and protective environmental steps as stated in the MoEF guidelines, 2010.
10. The contractor shall carry out on road inspection for black smoke generating machinery. The contractor shall use cleaner fuel.
11. The contractor shall ensure that all DG sets comply emission norms notified by MoEF.
12. The contractor shall use vehicles having pollution under control certificate. The emissions can be reduced by a large extent by reducing the speed of a vehicle to 20 Km/ph. Speed bumps shall be used to ensure speed reduction. In cases where speed reduction cannot effectively reduce fugitive dust, the contractor shall divert traffic to nearby paved areas.
13. The contractor shall ensure that the construction material is covered by tarpaulin. The contractor shall take all other precaution to ensure that no dust particles are permitted to pollute air quality as a result of such storage.

CONDITION FOR MATERIAL AND QUALITY ASSURANCE

1. The contractor shall ensure quality control measures on different aspects of construction including materials, workmanship and correct construction methodologies to be adopted. He shall have to submit quality assurance programme within two weeks of the award of work. The quality assurance programme should include method statement for various items of work to be executed along with check lists to enforce quality control.
2. The contractor shall get the source of all other materials, not specified elsewhere in the document, approved from the Engineer-in-Charge. The contractor shall stick to the approved source unless it is absolutely unavoidable. Any change shall be done with the prior approval of the Engineer-in-Charge for which tests etc. shall be done by the contractor at his own cost. Similarly, the contractor shall submit brand/ make of various materials not specified in the agreement, to be used for the approval of the Engineer-in-Charge along with samples and once approved, he shall stick to it.
3. **Other Laboratories :**
The contractor shall arrange carrying out all tests required under the agreement through the laboratory as approved by the Engineer-in-Charge and shall bear all charges in connection therewith including charges for testing for all materials except cement for which separate condition is provided in tender document.
4. **Sampling of Materials:**
Sample of building materials fittings and other articles required for execution of work shall be got approved from the Engineer-in-Charge. Articles manufactured by companies of repute and approved by the Engineer-in-Charge shall only be used. Articles bearing BIS certification mark shall be used in case the above are not available, the quality of samples brought by the contractor shall be judged by standards laid down in the relevant BIS specifications. All materials and articles brought by the contractor to the site for use shall conform to the samples approved by the Engineer-in-Charge which shall be preserved till the completion of the work.
The contractor shall ensure quality construction in a planned and time bound manner. Any sub- standard material/work beyond set out tolerance limit shall be summarily rejected by the Engineer-in-Charge.
BIS marked materials except otherwise specified shall be subjected to quality test at the discretion of the Engineer-in-Charge besides testing of other materials as per the specifications described for the item/materials. Wherever BIS marked materials are brought to the site of work, the contractor shall if required, by the Engineer-in-Charge furnish manufacturers test certificate to establish that the material produced by the contractor for incorporation in the work satisfies the provisions of BIS codes relevant to the material and/or the work done.
The contractor shall procure all the materials in advance so that there is sufficient time to testing and approving of the materials and clearance of the same before use in work.
All materials brought by the contractor for use in the work shall be got checked from the Engineer-in-Charge or his authorized representative of the work on receipt of the same at site before use.
The contractor shall be fully responsible for the safe custody of the materials issued to him even if the materials are in double lock and key system.
The Stone aggregate/stone, sand shall be brought from any quarries subjected to the said materials confirm CPWD specifications.
5. The day to day receipt and issue accounts of different grade/brand of cement shall be maintained separately in the standard proforma by the Jr. Engineer-in-Charge of work and which shall be duly signed by the contractor or his authorised representative.

- 6 The contractor shall render all help and assistance in documenting the total sequence of this project by way of photography, slides, audio-video recording etc. Nothing extra shall be payable to the contractor on this account. However cost of photographs, slides, audio/videography etc shall be born by the department.
- 7 The contractor shall be fully responsible for the safe custody of materials brought by him issued to him even though the materials are under double lock key system.
- 8 Separate cement registers showing the receipt of the OPC and PPC shall be maintained at site. The contractor shall construct separate godowns for storage of OPC & PPC at site and nothing extra on this account shall be payable.
- 9 Cement issued shall be for consumption at site only. No cement for factory made items and those not manufactured at site shall be issued.
- 10 In case there is any discrepancy in frequency of testing as given in the list of mandatory test and that in the individual sub-head of work as per CPWD specification 2019 Vol. 1 & 2 the higher of the two frequencies of testing shall be adopted.

11 Maintenance of Cement Register:

All the register of tests to be carried out at construction site or in outside laboratories shall **be maintained by the contractor** which shall be issued to the contractor by Engineer-in-Charge in the same manner as being issued to CPWD field staff. **It shall be mandatory for the field staff to retain the self-attested (by agencies/contractors) copies of tax paid bill of the materials entered in the MAS register viz. Steel, Cement, Bitumen, Paint, Primer, distemper, varnishes, Tile Adhesive, Admixture, Anti termite chemical, Water proofing compound material and any other item as decided by the NIT approving authority. Self-attested copies of Tax paid bills of materials taken in MAS register shall be obtained by the field staff from the agencies/contractors before setting the payments. In case of any doubt the same can be verified by the field staff. However, onus of genuineness of Tax paid bills rests with the agencies/contractors.**

- (i) The test registers to be issued to the contractor are :
 - a) Materials at site account register.
 - b) Cement register.
 - c) Master test registers.
 - d) Cube test register.
 - e) Paint register.
 - f) Inspection register.
 - g) Drawing register.
- (ii) All the entries in the register will be made by the designated engineering staff of the contractor and same should be regularly reviewed by JE/AE/EE.
- (iii) Contractor shall be responsible for safe custody of all the test registers.
- (iv) Submission of copy of all test registers, material at site register along with each alternate running account bill and final bill shall be mandatory. These registers should be duly checked by AE(P) in division office.

Safety Measures

When workers are employed in sewers and manholes, which are in active use, the contractors shall ensure that the manhole covers are opened and ventilated at least for an hour before the workers are allowed to get into the manholes, and the manholes so opened shall be cordoned off with suitable railing and provided with warning signals or boards to prevent accident to the public. In addition, the contractor shall ensure that the following safety measures are adhered to:-

- a. Entry for workers into the line shall not be allowed except under supervision of the JE or any other higher officer.
- b. At least 5 to 6 manholes upstream and downstream should be kept for at least 2 to 3 hours before any man is allowed to enter into the manhole for working inside.
- c. Before entry, presence of toxic gases should be tested by Inserting wet lead acetate paper which changes colour in the presence of such gases and gives indication of their presence.
- d. Presence of Oxygen should be verified by lowering a detector lamp into the manhole. In case, no Oxygen is found inside the sewer line workers should be sent only with Oxygen Kit.
- e. Safety belt with rope should be provided to the workers. While working inside the manholes, such rope should be handled by two men standing outside to enable him to be pulled out during emergency.
- f. The area should be barricaded or cordoned off by suitable means to avoid mishaps of any kind. Proper warning signs should be displayed for the safety of the public whenever cleaning works are undertaken during night or day.
- g. No smoking or open flames shall be allowed near the blocked manhole being cleaned.
- h. The malba obtained on account of cleaning of blocked manholes and sewer lines should be immediately removed to avoid accidents on account of slippery nature of the malba.
- i. Workers should not be allowed to work inside the manhole continuously. He should be given rest intermittently. The Engineer-in-Charge may decide the time up to which a worker may be allowed to work continuously inside the manhole.
- j. Gas masks with Oxygen Cylinder should be kept at site for use in emergency.
- k. Air-blowers should be used for flow of fresh air through the manholes. Whenever called for, portable air blowers are recommended for ventilating the manholes. The Motors for these shall be vapour proof and of totally enclosed type. Non sparking gas engines also could be used but they should be placed at least 2 metres away from the opening and on the leeward side protected from wind so that they will not be a source of friction on any inflammable gas not that might be present.
- l. The workers engaged for cleaning the manholes/sewers should be properly trained before allowing to work in the manhole.
- m. The workers shall be provided with Gumboots or non-sparking shoes bump helmets and gloves non sparking tools safety lights and gas masks and portable air blowers (when necessary). They must be supplied with barrier cream for anointing the limbs before working inside the sewer lines.
- n. Workmen descending a manhole shall try each ladder stop or rung carefully before putting his full weight on it to guard against insecure fastening due to corrosion of the rung fixed to manhole well.
- o. If a man has received a physical injury, he should be brought out of the sewer immediately and adequate medical aid should be provided to him.
- p. The extent to which these precautions are to be taken depend on individual situation but the decision of the Engineer-in-Charge regarding the steps to be taken in this regard in an individual case will be final.

LIST – A**LIST OF APPROVED INSTITUTE/LABORATORY FOR DESIGN MIX/ JOB MIX**

1.	IIT Delhi
2.	C.R.R.I, Delhi
3.	IIT Roorkee
4.	Delhi Technical University, Delhi

LIST – B**LIST OF APPROVED INSTITUTE/LABORATORY FOR TESTING OF MATERIAL**

1.	IIT Delhi
2.	C.R.R.I, Delhi
3.	IIT Roorkee
4.	Shri Ram Institute for Industrial Research, University Road, Delhi
5.	Delhi Technical University, Delhi
6.	NABL (approved by E-in-C/ADG M&F)

LIST OF PREFERRED BRANDS/ MANUFACTURERS/MAKES**NOTES:**

- 1) A List of Preferred Brand Names of Various Materials / Products are shown below for usage in execution of Work. However, approved equivalent material of any other Specialized Companies / Firms may also be used, in case it is established that the Brands Specified below are not available in the market or in other unavoidable circumstances and subject to Approval of the alternate Brand by the Chief Engineer, North Maint. Zone., PWD and also subject to cost adjustment, if any.
- 2) It must be ensured, in general, that all materials to be used in the works shall bear BIS Certification mark. In cases where for a particular material/product, BIS Certification Mark is not available, then the material proposed to be procured can be used subject to the condition that it should conform to CPWD Specifications and relevant BIS codes. In such cases written approval of the Engineer-in -Charge shall be obtained before use of such material in their works.
- 3) The list given below does not absolve the Executing Agency from their responsibility for using these products. It is only after they are satisfied about the quality and performance, the products shall be used. To achieve this, a proper check on the quality of the product, actually to be used, should be exercised.

Sl. No.	Material	Approved make
1	Ordinary Portland Cement	ACC, Gujarat Ambuja (Vikram), Ultra-Tech, JP Rewa, J.K. cement, Lafarge Cement, Cement Corporation of India
2	Slag Cement	ACC, Gujrat Ambuja, Ultra-Tech
3	TMTFe-500D/550D Reinforcement Bars	Tata Steel, RINL, SAIL, JSW, JSPL
4	Structural Steel	SAIL, RINL, IISCO, JSW Steel Limited, Jindal Steel Power Limited, TATA Steel Limited
5	Mild Steel Tubes	Tata Steel, JSW, JSPL, SAIL
6	Stainless Steel	Tata Steel, JSW, SAIL
7	Welding Electrodes	ESAB, Advani-orlikon, Weld Alloy
8	Synthetic Enamel Paints	Asian (Apolite), Berger Luxol (gold), ICI Dulux (Gloss), Nerolac (Full gloss hard drying), SPT Sahara Plus, BIRLA OPUS PRIME
9	Thermoplastic paints	Asian, Berger, ICI, SPT Sahara Plus, Reliance Thermoplast, Alcolite
10	RMC	ACC, BIRLA, L&T, Unitech, Ultratech, Prism Johnson, V.K. Ready Mix Concrete, Shri Ram Ready Mix Concrete, NDCON, ANTRITECH, SEHWAG RMC.
11	Admixtures	FOSROC, SIKA, MBT, CICO Technologies Ltd., MC Baucheme, BASF
12	Release Agent	FOSROC, MBT, CICO, MC Baucheme, BASF
13	Epoxy	FOSROC, SIKA, QUALCRETE, CIBA, Trimurti Wall care Products Pvt. Ltd.
14	Bitumen PMB-76-10/ Bitumen VG-30 / Bitumen Emulsion.	IOCL, BPCL, HPCL, Indian Oil Total Pvt. Ltd., Hindustan Colas Pvt. Ltd. (HINCOL), JALNIDHI, IWL India Pvt. Ltd.

15	Paint Emulsion, Wall Primer, Acrylic Distemper	Asian, Berger, Dulux, Nerolac, BIRLA OPUS PRIME,
16	Glow Stud (Cat Eye)	DarkEye, 3M, Avery Dennison, Alcolite, Night Glow
17	Solar Stud	DarkEye, 3M, Avery Dennison, Alcolite, Night Glow
18	Delineator	DarkEye, 3M, Avery Dennison, Alcolite, Night Glow
19	Geotex tile & Geo-grids	AIMIL, Z-Tech, Netlon(India), Garware wall ropes Ltd, Maccaferri
20	Tactile Tiles/Vitrified Tiles	Kajaria Ceramics Ltd., Somany Ceramics Ltd, Johnson, Swastik Tiles
21	Paver blocks	KK, NITCO, Dalal, KPF, Perfect Tiles, Swastik Tiles, Shree Shyam Tiles.
22	Kerb Stone	KK, NITCO, Dalal, KPF, Perfect Tiles, Swastik Tiles, Shree Shyam Tiles.
23	Manhole covers/frames/RCC Drain Cover	KK, NITCO, Dalal, KPF, Perfect Tiles, Shree Shyam Tiles.
24	Glazed Tile	ORIENT, SOMANY, NITCO, KAJARIA, Johnson, Swastik Tiles
25	Cement Paint, Paint, Distemper, Primer	ICI India Ltd, Berger Paint Ltd, Good Loss Nerolac Paint, Asian Paint Ltd, Jenson and Nicholson India Ltd., Trimurti Wall care Products Pvt. Ltd. Snowcem India Ltd.
26	Retro Reflective Sheet	3M, Avery Dennison, ORAFOL
27	RCC PIPES	IHP or ISI marked equivalent
28	SFRC Railing	KK, HCP, KPF
29	Precast RCC Drain / Precast RCC Elements	FUJI SILVERTECH, SIDDHI VINAYAK Pre-cast Pipes Pvt. Ltd., FUJI Infrastructure Technology Pvt. Ltd., Trilok Infratech Private Ltd.

- NOTE: -**
- 1. In addition to all above brands, other brands/manufacturers are also eligible, if approved by E-in-C/Pr. CE, PWD in their respective category.**
 - 2. Prior approval of NIT Approving Authority is to be obtained in case of any other make, if required, by giving three make timely with justification. No delay if any on this account shall be entertained. The other make will be allowed only subject to cost adjustment, if any.**
 - 3. The NIT approving authority /Pr. CE (M&F) reserve the right to modify name and number of manufactures given in the above table.**

	लोक निर्माण विभाग सचिवालय, PUBLIC WORKS DEPARTMENT SECRETARIAT, दिल्ली सरकार Govt of NCT of Delhi, तीसरी मंजिल, एमएसओ बिल्डिंग, आईपी एस्टेट, आईटीओ नई दिल्ली-110002 3rd FLOOR, MSO BUILDING, IP ESTATE, ITO, NEW DELHI-110002	
---	---	---

F.No.dspwd-2/E-343137/1895-1901

Dated 20.05.2026

CIRCULAR

Sub: Adoption of revised provisions relating to Performance Guarantee (PG) and Enhanced Performance Guarantee (EPG) in PWD in line with CPWD O.M. dated 27.02.2026.

The Competent Authority has approved adoption of the revised provisions relating to Performance Guarantee (PG) and Enhanced Performance Guarantee (EPG), as notified by the Central Public Works Department (CPWD) vide Office Memorandum No. DG/Manual-2024/20 dated 27.02.2026, for all works/contracts in Public Works Department, GNCTD.

Accordingly, the Circular issued by PWD, GNCTD, vide No. F.dspwd-2/CD057801602/1641-1647 dated 14.08.2025 on the subject "Imposition of Enhanced Performance Guarantee in case of Abnormally Low Bids-Reg" is, hereby, withdrawn with immediate effect.


 (M.K. Nikhil)
 Dy. Secretary (PWD)

To

1. The Engineer in Chief PWD, 12th Floor, MSO Building, New Delhi
2. All Chief Engineers of the PWD, MSO Building, New Delhi
3. All SEs/EEs concerned through Chief Engineers
4. System Analyst, PWD with the request to upload the Circular on the website of PWD under relevant section.

Copy for information to:

1. Secretary to Hon'ble Minister (PWD), GNCTD
2. PS to Pr. Secretary, PWD, 3rd Floor MSO Building, New Delhi
3. PS to Special Secretary, PWD-I/II, 3rd Floor MSO Building, New Delhi


 (M.K. Nikhil)
 Dy. Secretary (PWD)

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

केन्द्रीय लोक निर्माण विभाग
कार्यालय झापन

No. DG/Manual-2024/20

ISSUED BY THE AUTHORITY OF DIRECTOR GENERAL, CPWD

Vidyut Bhawan, New Delhi

Dated: 27.02.2026

Sub: Modification in Para 5.2 for CPWD Works Manual 2024.

Following modification is made in Para no. 5.2 for CPWD Works Manual 2024:

Existing Provision	Modified Provision
5.2 Performance Guarantee	5.2 Performance Guarantee
Sl. No. 1	No Change
2. PG shall be 5% of the contract amount or as prescribed from time to time to be submitted in the form as prescribed in GCC. Performance Guarantee shall remain valid for a minimum period of sixty days beyond the date of completion of all contractual obligations as per GCC. In case of contracts where supplementary agreement is drawn, the fresh PG shall be obtained from the contractor @ 5% of the amount of the supplementary agreement or as prescribed from time to time. The PG received against the original work shall be released as per contract conditions.	2. PG shall be 5% of the Estimated cost put to tender (ECPT) or contract amount whichever is higher , or as prescribed from time to time, to be submitted in the form as prescribed in GCC. Performance Guarantee shall remain valid for a minimum period of six months beyond the date of completion of all contractual obligations as per GCC. In case of contracts where supplementary agreement is drawn, the fresh PG shall be obtained from the contractor @ 5% of the amount of the supplementary agreement or as prescribed from time to time. The PG received against the original work shall be released as per contract conditions.
Sl. No. 3	No Change
4. No provision	4. A bid will be treated as abnormally low if the quoted bid amount is lesser than 80% of the estimated cost put to tender.
5. No provision	5. Requirement of Additional Performance Guarantee (APG) : In case of abnormally low bids as defined above, the bidder shall be required to submit Additional Performance Guarantee (APG) in addition to the Standard Performance Guarantee (PG). The amount of Additional Performance Guarantee (APG) shall be equivalent to the difference between the 80% amount of ECPT and quoted amount. (e.g. if ECPT is A and quoted amount is 0.7A then the amount of APG shall be

1-2-2026 Jindal
EE (Contract)


CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)


	0.8A – 0.7A). The Additional Performance Guarantee (APG) shall be in the prescribed format of Performance Guarantee and has to be submitted within the time frame prescribed for submission of Performance Guarantee. The other terms and conditions of release etc. of APG shall be same as that of PG.
--	--

This is issues with the approval of DG CPWD.


27.02.2026
(चन्द्र पाल)
अधीक्षण अभियंता (सी.ए.ए.ए.)
Chandar Pal, SE (C&M)

Issued from file No. CSQ/CM/16(1)/2026 e-file 9212995 (DFA/ 9365789)

केलोनवि तथा लोनवि दिल्ली के सभी अधिकारियों को आवश्यक सूचना एवं कार्यवाही हेतु। (केलोनवि वेबसाईट के माध्यम से)


21.1.16

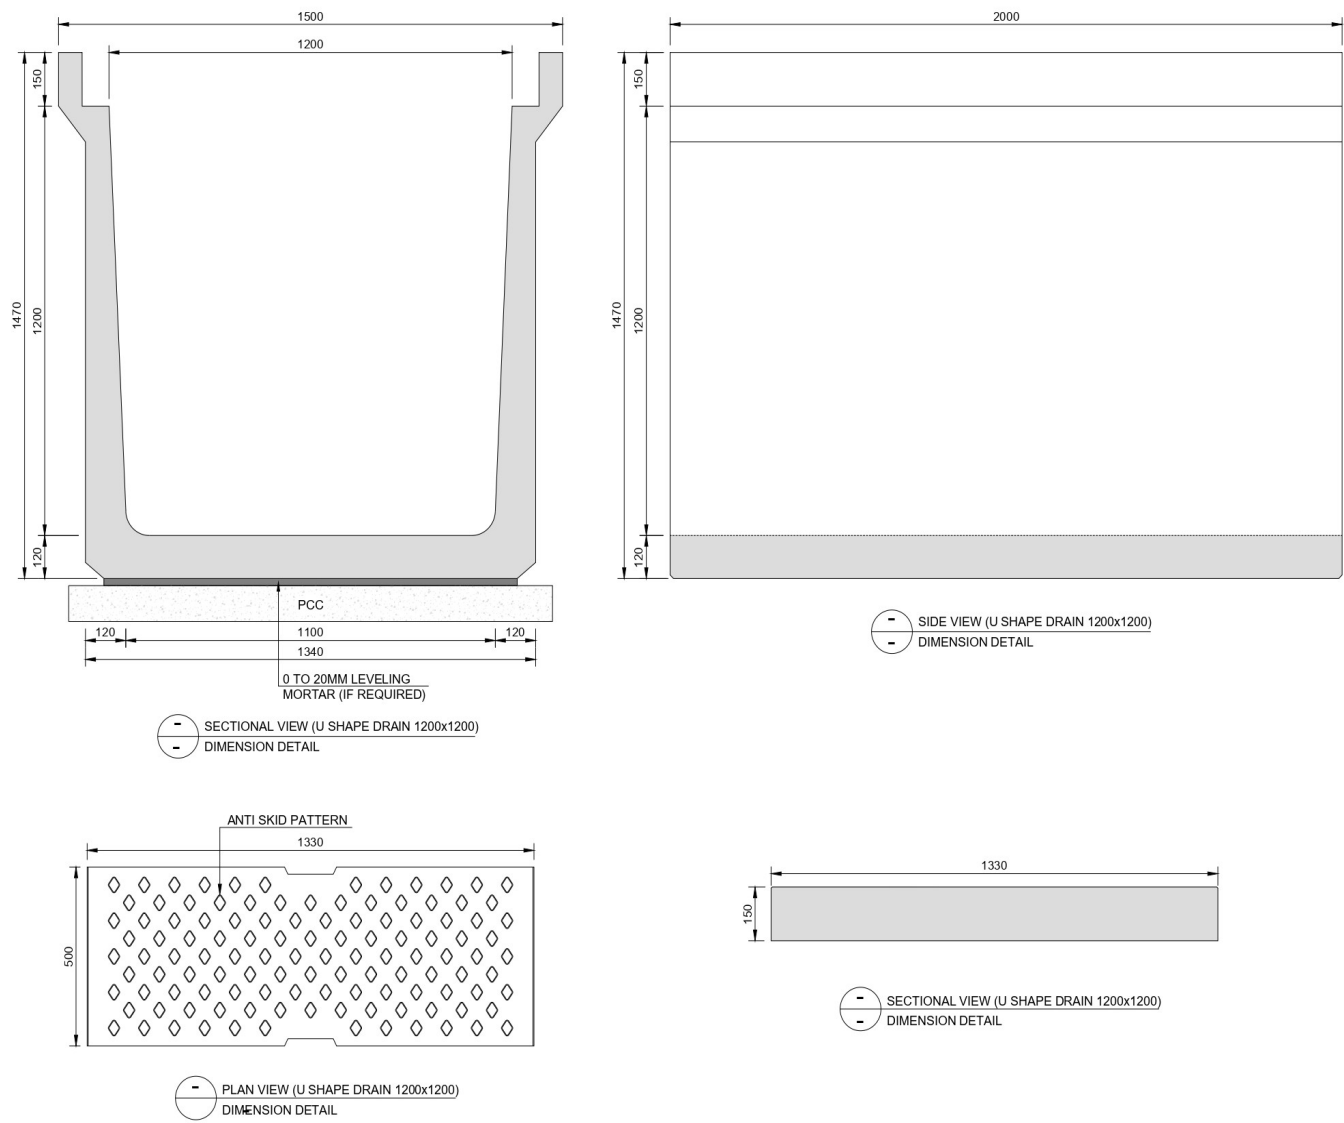
D.P. Jindal
EE (Contract)

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

Typical Cross Section of RCC Precast drain and Precast Lid



****These drawings are indicative subjected to change as per approved shop drawings.**

CORRECCION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)

EE (P)

Schedule of Quantity

Name of Work : Remodeling of storm water drain as per New Master Drainage Plan 2025 of (1.) Lal Sai to Pankha Road (Both Side) (2.) 60 Futta Road From Palam Drain to Mahavir Enclave Chowk) (Both Side) (3.) Shani Bazar Road (From Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (4.) Ram Mandir Marg (Vidhya Marg to Major P. Shri Kumar Marg (Both Side) (5.) Vidhya Marg (Dada Satram Mamtani Marg) (RHS) under PWD Division West Road-1, Sub Division WR-12, New Delhi.)

S.No	Description	Qty	Unit	Rate	Amount
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means over areas (exceeding 30cm in depth, 1.5m in width as well as 10 sqm on plan) including getting out and disposal of excavated earth, lead up to 50m and for all lift as directed by Engineer-in-Charge.				
1.1	All kinds of soil	15673.00	Cum	177.50	27,81,958.00
2	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 and for all lift.	6440.00	Cum	196.00	12,62,240.00
3	Providing and laying in position ready mixed or site batched design mix cement concrete for plain cement concrete work; using coarse aggregate and fine aggregate derived from natural sources, Portland Pozzolana/Ordinary Portland /Portland Slag cement, admixtures in recommended proportions as per IS: 9103 to accelerate / retard setting of concrete, to improve durability and workability without impairing strength; including pumping of concrete to site of laying, curing, carriage for all leads; but excluding the cost of centering, shuttering and finishing as per direction of the engineer-in-charge; for the following grades of concrete. Note: Extra cement up to 10% of the minimum specified cement content in design mix shall be payable separately. In case the cement content in design mix is more than 110% of the minimum specified cement content, the contractor shall have discretion to either re-design the mix or bear the cost of extra cement.				
3.1	All works upto plinth level :				
3.1.1	Concrete of M10 grade with minimum cement content of 220 kg /cum	1690.00	Cum	8835.15	1,49,31,404.00

CORRECCION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

4	Centering and shuttering including strutting, propping etc. and removal of form for :				
4.1	Walls (any thickness) including attached pilasters, butteresses, plinth and string courses etc.	29906.00	Sqm	842.50	2,51,95,805.00
4.2	Suspended floors, roofs, landings, balconies and access platform.	7374.00	Sqm	927.25	68,37,542.00
5	Edges of slabs and breaks in floors and walls				
5.1	Under 20 cm wide	17706.00	Meter	208.55	36,92,586.00
6	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete up to plinth level.				
6.1	Thermo-Mechanically Treated bars of grade Fe-500 D or more.	194700.00	Kg	107.85	2,09,98,395.00
7	Providing and laying in position ready mixed or site batched design mix cement concrete for reinforced cement concrete work; using coarse aggregate and fine aggregate derived from natural sources, Portland Pozzolana / Ordinary Portland /Portland Slag cement, admixtures in recommended proportions as per IS: 9103 to accelerate / retard setting of concrete, to improve durability and workability without impairing strength; including pumping of concrete to site of laying, curing, carriage for all leads; but excluding the cost of centering, shuttering, finishing and reinforcement as per direction of the engineer-in-charge; for the following grades of concrete.				
	Note: Extra cement up to 10% of the minimum specified cement content in design mix shall be payable separately. In case the cement content in design mix is more than 110% of the specified minimum cement content, the contractor shall have discretion to either re-design the mix or bear the cost of extra cement				
7.1	All works up to plinth level.				
7.1.1	Concrete of M50 grade with minimum cement content of 410 kg/cum	1947.00	Cum	10108.65	1,96,81,542.00
8	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade :				
8.1	Two or more coats on new work over an under coat of suitable shade with ordinary paint of approved brand and manufacture	92.00	Sqm	226.25	20,815.00

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

9	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade :				
9.1	One or more coats on old work	2197.00	Sqm	102.80	2,25,852.00
10	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge.				
10.1	Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	1587.00	Cum	2434.25	38,63,155.00
11	Demolishing R.C.C. work manually/ by mechanical means including stacking of steel bars and disposal of unserviceable material within 50 metres lead as per direction of Engineer - in- charge.	854.00	Cum	3551.25	30,32,768.00
12	Extra for cutting reinforcement bars manually/ by mechanical means in R.C.C. or R.B. work (Payment shall be made on the cross sectional area of R.C.C. or R.B. work) as per direction of Engineer-in-charge.	528.00	Sqm	1147.20	6,05,722.00
13	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge.				
13.1	In cement mortar	4678.00	Cum	2060.20	96,37,616.00
14	Disposal of building rubbish / malba / similar unserviceable, dismantled or waste materials by mechanical means, including loading, transporting, unloading to approved municipal dumping ground or as approved by Engineer-in-charge, beyond 50 m initial lead, for all leads including all lifts involved.	14765.00	Cum	263.95	38,97,222.00
15	Providing and laying at or near ground level factory made kerb stone of M-25 grade cement concrete in position to the required line, level and curvature, jointed with cement mortar 1:3 (1 cement: 3 coarse sand), including making joints with or without grooves (thickness of joints except at sharp curve shall not to more than 5mm), including making drainage opening wherever required complete etc. as per direction of Engineer-in-charge (length of finished kerb edging shall be measured to calculate volume for payment). (Precast C.C. kerb stone shall be approved by Engineer-in-charge).	135.00	Cum	10117.60	13,65,876.00

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

16	Taking out existing kerb stones of all types from footpath/ central verge, including removal of mortar etc., disposal of unserviceable material to the dumping ground, for which payment shall be made separately and stacking of serviceable material within 50 metre lead as per direction of Engineer-in-Charge.	4746.00	Mtr.	39.35	1,86,755.00
17	Taking out existing CC interlocking paver blocks from footpath/ central verge, including removal of rubbish etc., disposal of unserviceable material to the dumping ground, for which payment shall be made separately and stacking of serviceable material within 50 metre lead as per direction of Engineer-in-Charge.	11760.00	Sqm	131.75	15,49,380.00
18	Laying old cement concrete interlocking paver blocks of any design/ shape laid in required line, level, curvature, colour and pattern over and including 50 mm thick compacted bed of coarse sand, filling the joints with fine sand etc. all complete as per the direction of Engineer in-charge. (Old CC paver blocks shall be supplied by the department free of cost).	9408.00	Sqm	402.95	37,90,954.00
19	Laying at or near ground level old kerb stones of all types in position to the required line, level and curvature, jointed with cement mortar 1:3 (1 cement : 3 coarse sand), including making joints with or without grooves (thickness of joints, except at sharp curve, shall not be more than 5 mm), including making drainage opening wherever required etc. complete as per direction of Engineer-in-charge. (Length of finished kerb edging shall be measured for payment). (Old kerb stones shall be supplied by the department free of cost)	3797.00	Sqm	109.45	4,15,582.00
20	Providing and laying non-pressure NP2 class (light duty) R.C.C. pipes with collars jointed with stiff mixture of cement mortar in the proportion of 1:2 (1 cement : 2 fine sand) including testing of joints etc. complete :				
20.1	300 mm dia. R.C.C. pipe	1454.00	Mtr	994.30	14,45,712.00
21	Providing and laying 60mm thick factory made cement concrete paver block of approved shape and colour of M -30 grade made of C&D waste by block making machine with vibratory compaction laid in required pattern and including over 50mm thick compacted bed of coarse sand, filling the joints with fine sand etc. all complete as per the direction of Engineer-in-charge.	4326.00	Sqm	829.75	35,89,499.00

CORRECCION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

				Total	12,90,08,380.00
				GST Correction Factor @ 0.973 on DSR Items	12,55,25,154.00
				Add Cost Index 3%	37,65,755.00
				Total	12,92,90,909.00
22	Providing & fixing pre-fabricated precast solid open U shaped RCC drain, drain cover, box culvert, crash barrier, retaining wall, silt chamber etc. using wet-cast technology with self-compacting concrete of grade M-50 and Thermo-mechanically treated (TMT) steel bars of grade Fe-550D including straightening, cutting, bending, placing in position and binding, all complete upto plinth level with provisions of shear keys, connecting loops, necessary cutouts/holes lined with dowel tubes of required sizes for services with proper lifting arrangement of various thicknesses, shape and size using high quality steel molds including loading, transportation from factory to site of work, unloading, stacking at site and placing in final position with the help of required capacity cranes all complete as per IS-11447:1985 and as per approved shop drawings and design mix complete as per the directions of Engineer-in-Charge. The RCC precast drain along with drain cover taken together as an integrated system, shall be capable of carrying a wheel load of 5 Ton of vehicular load. The precast elements shall be manufactured in a controlled factory environment with approved methodology/technology having all facilities including automated steam curing, automated reinforcement cage making facility, NABL accredited in-house laboratory with all testing facilities etc, complete as per the directions of Engineer-in-Charge. The installation of RCC precast drain, drain cover, box culvert etc, shall be done in correct and final position with proper line, level and plumb at site after making all arrangements of requisite T&P e.g., cranes, push-pull jacks etc. for lifting, placing and alignment of elements within erection tolerance as per IS-15916:2020, as per approved shop drawings, complete as per direction of Engineer-in-Charge including cost of all material and all tools & machinery required for casting for all works up to plinth level complete as per the directions of Engineer-in Charge.	4117.00	Cum	45118.52	18,57,52,947.00

CORRECCION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

23	Providing and placing in position 150 mm thick factory made machine batched & machine mixed Precast RCC Rectangular Covers on drains of footpath of various sizes, of M-25 grade cement concrete for RCC work, including cost of centering, shuttering, reinforcement of 10 mm dia TMT bars of Fe 500 grade @ 150 C/C on both ways , neat cement punning on finished surface, properly encased on all edges with 1.6 mm thick , 150 mm wide MS sheet duly painted over priming coat , reinforcement to be welded at edges with MS sheet and providing 2 Nos. 12 mm dia bar for hooks etc i/c cost of cartage, all leads & lift, handling at site etc. all complete as per direction of Engineer-in-Charge.	2830.00	Sqm	3724.80	1,05,41,184.00
24	Providing and fixing in position precast reinforced cement concrete Bollards of size 950mm height,150mm dia vibro compacted accurately designed, moulds appropriate reinforced with circular plastic spaced and concret grade of M-25 as per approved design/drawing. The bollards shall be fixed in CC block of Mix 1:2:4 (1 cement :2 coarse sand:4 graded stone aggregate 20mm nominal bore) and of size 30x30x30cm including earth work in excavation etc. complete as per the direction and instruction of Engineer-in-charge.	420.00	Each	799.56	3,35,815.00
25	Providing and laying factory made Tactile paver blocks (for vision impaired persons as per standard) in foot path, park & lawns driveway or light & traffic parking etc. of required strength, thickness & size/ shape, made by table vibratory method using PU mould, laid in required colour & pattern over 50mm thick compacted bed of course sand, compacting and proper embedding/laying of inter locking paver block into the sand bedding layer through vibratory compaction by using plate vibrator, filling the joints with sand and cutting of paver blocks as required size and pattern, finishing and sweeping extra sand, all complete as per manufacturer's specification & direction of Engineer-in-Charge.				
	60mm thick Tactile paver block of M-30 grade with approved colour, design & pattern.	1546.00	Sqm	1679.68	25,96,785.00
26	Subsurface survey				
	Subsurface Utility Engineering (SUE) Survey				

CORRECTION-----NIL-----
 DELETION-----NIL-----
 INSERTION-----NIL-----

AE (P)

EE (P)

	Conducting SUE Survey in a corridor of 4-6 meter width to detect buried utilities like pipes, cables etc. in such corridor. Marking of the detected utilities on the map of corridor with information of locations and depths to the top of various utilities detected. Onsite detection to be conducted using minimum. tools of Electronic Pipe Locator (EPL) and Ground Penetrating Radar (GPR). GPR work to be conducted using 500MHz and 300MHz antenna for best possible resolution and penetration. The specifications are SUE survey should be in accordance with 'Code of Practice for Subsurface Utility Engineering Suiting Indian Conditions Guidelines & Specifications for Detection, Verification & Depiction of Existing Subsurface Utility Data'.				
26.1	Along the Road, 6m wide corridor	6780.00	Mtr.	60.00	4,06,800.00
26.2	Road Crossing	20.00	Crossing	44040.00	8,80,800.00
27	Credit for serviceable materials received from dismantling/demolishing of respective items including taking away from site, the serviceable materials will be the property of the contractor complete as per the direction of Engineer-in-charge.				
	TMT/Cold twisted bars	-12810.00	Kg	25.00	(3,20,250.00)
	Total				32,94,84,990.00

Note : 1. All arrangement for traffic diversion and waste water diversion of existing drain and removal of all kinds of existing malba at site has to be made by the contractor at his own cost for which nothing shall be payable to the agency. Agency has to quote his rates accordingly

2. Average steel in precast RCC drain considered @ 100 Kg./ Cum., which may vary @ 70 Kg./Cum. to 200 Kg./Cum. or more depending upon various section of precast RCC drain/elements.

**Executive Engineer
Division West Road -1, PWD,
R. R. Lines, Dhaula Kuan,
Delhi 110010**

Signature Not Verified

Digitally signed by Vikas Singh
Date: 2026.06.06 17:29:09 IST
Location: NCD of Delhi-DL
EE (P)

CORRECTION-----NIL-----
DELETION-----NIL-----
INSERTION-----NIL-----

AE (P)