



CAP SPHERICAL

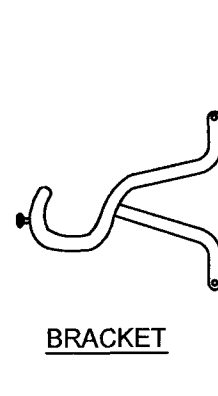

BRACKET

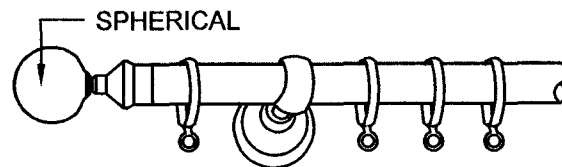


SPHERICAL




RING

STAINLESS STEEL (SS) DRAPERY ROD WITH BRACKET & RING


TYPE - 'A'

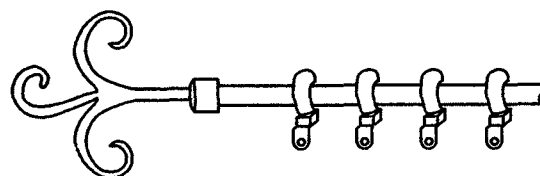

THREE BRANCH FINAL - 1




CLUB FINAL - 2




PEACOCK FINAL - 3

STAINLESS STEEL (SS) DRAPERY ROD WITH BRACKET & RING

TYPE - 'B'




RING



STD. BRACKET




DOUBLE BRACKET
(LENGTH 215 TO 225 MM)
FOR OFFRS MD ACCN




CAP

NATURAL - SW 001 - 1

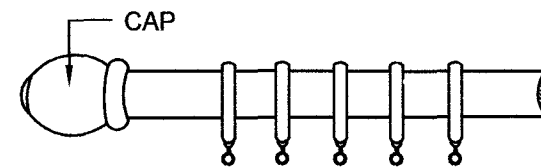

CAP

ELM - SW 002 - 2

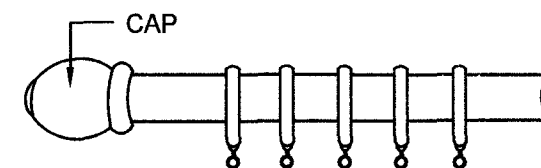

CAP

WALL NUT - SW 003 - 3



BRACKET - 150 MM



BRACKET - 100 MM




RING



WALL TO WALL
BRACKET


DETAILS OF WOODEN DRAPERY ROD (SEASONED ITALIAN WOOD) WITH RING & BRACKET

TYPE - 'C'




CAP SPHERICAL

INDIAN BRONZE - 1B 086 - 1

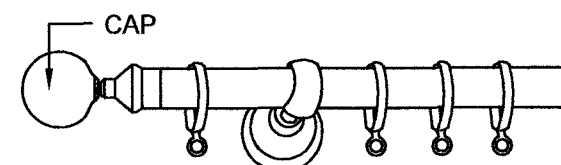


CAP

INDIAN BRONZE - 1B 086 - 2/
METALLIC BURUGUNDY - CG 015 - 3



SECTION



BRACKET



RING

ALUMINUM DRAPERY ROD WITH BRACKET & RING

TYPE - 'D'

SL. NO.	NOTES
1	CONTRACTOR TO CHECK & VERIFY ALL DIMENSIONS BEFORE EXECUTION OF THE WORK.
2	FIGURED DIMENSIONS SHALL BE FOLLOWED.
3	ALL DIMENSIONS ARE GIVEN IN MILLIMETRES UNLESS OTHERWISE SPECIFIED.
4	ALL STAINLESS STEEL SECTIONS / ITEMS OF DRAPERY SHALL BE PRE POLISHED AS PER I S PROVISIONS.
5	ALL WOODEN MEMBERS / ITEMS OF DRAPERY ROD SHALL BE POLISHED & SMOOTH FAIR FINISH.
6	TYPE - 'A' DRAPERY SHALL BE PROVIDED IF NOT MENTIONED IN MAIN DRGS.
7	DR - MARKED IN MAIN DRGS. INDICATES DRAPERY ROD.
8	CURTAIN RINGS SHOWN ARE ONLY FOR PRESENTATION OF DRG. AND NOT FORM PART OF LUMP SUM TENDER.
9	STAINLESS STEEL DRAPERY RODS SHALL BE OF S S 302 GRADE.
10	BRACKETS SHALL BE FIXED TO WALL WITH RAWL PLUGS USING S S SCREWS MIN. 75 MM LONG
11	SIZE OF S S BRACKETS SHALL NOT BE LESS THAN THE SIZES MENTIONED IN DRG.
12	PROVIDE ONE OR MORE CENTRE SUPPORT BRACKETS IN CASE OF LENGTH OF OPENING IS MORE THAN 1200 MM.
13	DRAPERY ROD SHALL HAVE A BEARING OF 100 MM. ON BOTH SIDES OF OPENING.
14	ALUMINIUM DRAPERY ROD SHALL BE POWDER COATED WITH 50-60 MICRONS / UPVC COATING.
15	TYPE OF DRAPERY ROD SHALL BE PROVIDED AS MENTIONED IN THE MAIN DRAWING OTHERWISE SPECIFIED IN THE TENDER.
16	TYPE & SPECIFICATION OF DRAPERY ROD:-

S.NO	TYPE OF RODS	DIA	THICKNESS
(a)	STAINLESS STEEL	25 MM	1.6 MM
(b)	WOODEN	28 MM	SOLID
(c)	ALUMINUM	25 MM	2 MM

S No	DATE	DESCRIPTION	INITIAL
01	08-02-23	UNDER NOTE & SL No 14 CORRECTED	LC

REVISIONS			
DATE	DESCRIPTION	BY	CHKD
26-06-2022	CHIEF ENGINEER (NAVY) VISAKHAPATNAM ZONE		

TYPICAL DETAILS OF DRAPERY / CURTAIN RODS			
DATE	DRN	TCD	CKD
26-06-2022	HAV RAVI	-	LC

SCALE	REF. DRG NO	TD - 25
1/1	CEVZ / 2022 / TD - 25	

AAD (ARCH)	JT. DIR. (ARCH)	DIRECTOR (ARCH) FOR CHIEF ENGINEER
LC	LC	LC